

Godox



# CONTINUOUS LIGHTING

Godox

GODOX Photo Equipment Co.,Ltd.

Factory Add: 4th Floor of Building 1, 1st to 4 th Floor of Building 2, 4th Floor of Building 3,1st to 4th Floor of Building 4,  
Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China  
TEL: +86-(0)755-25701197,25726373 FAX: +86-(0)755-25723423 Email: godox@godox.com

[www.godox.com](http://www.godox.com)



godoxglobal



GODOX Global



godoxphotoequipment



GODOX Photo



godoxofficial

2026 | 8th  
EDITION



# EMBRACE CREATIVE POSSIBILITIES

At Godox, we believe every creative idea worth exploring. That's why Godox is always with the creative minds, providing them with tools they need to explore their creativity, start their business, and pursue their dreams.

Since 1993, Godox has been dedicated to developing and delivering great and accessible lighting and audio solutions for photographers, videographers, filmmakers, and all potential creators. Godox is always moving forward to push the boundaries of technology. Adhere to our mission, Godox constantly brings innovative and professional products to the industries.

Embrace creative possibilities as more than just a tagline, we hope to empower every creative mind from every corner of the world, regardless of different careers or cultural backgrounds, giving them a chance to explore, create, express, and inspire the world.

# CONTENTS



## 05 • COB Lights

ML60IIBi/ML100Bi/ML100R  
ML80Bi/ML150Bi  
SL60IID/SL60IIBi  
SL100D/SL100Bi  
SL150III/SL150IIIBi/SL200III/SL200IIIBi/SL300III/SL300IIIBi  
FL15Bi

## 19 • RS Series

RS60R/RS60Bi  
RS100R/RS100Bi

## 25 • Focusing Lights

S60Bi

## 29 • Panel Lights

UP150R  
P260C Pro  
LDP8Bi/LDP18Bi  
LDX50R/LDX50Bi/LDX100R/LDX100Bi  
LED1000IID/LED1000IIBi  
LEDPI20C/LEDP260C

## 39 • Foldable LED Mat

FH50R/FH50Bi  
FL100R/FL200R/FL200SR  
FL60/FL100/FL150S/FL150R

## 45 • Hybrid Flash LED Lights

FV150/FV200  
LF308Bi

## 49 • RGBWW Tube Lights

TL30  
TL60  
TL120  
TL180

## 58 • Light Sticks

LC500mini/LC500Rmini  
LC500R(GBWW)  
LC500  
LC1000R/LC1000Bi

## 63 • Dive Lights

WT25D/WT40D/WT60D  
WT25R/WT40R/WT60R(GBWW)

## 67 • Streaming Lights

ES30  
ES45  
LR120/LR150  
LR160/LR180

## 74 • Waterproof Lights

WL4B  
WL8P

## 77 • Smartphone Lightings

MA5R  
AM01  
R1(GBWW)

M1(GBWW)  
LEDM32/LEDM150

## 83 • LITEMONS Series

LE200Bi/LE300Bi/LE600Bi  
LA600R/LA600Bi  
LA150R/LA200R/LA300R/LA300Bi  
LA150D/LA150Bi/LA200D/LA200Bi  
LP800Bi  
LP400R/LP600R/LP1200R/LP400Bi/LP600Bi/LP1200Bi  
C30Bi/C30R  
LR15Bi/LR30Bi  
LED6R(GBWW)/LED6Bi

## 99 • Godox Control

APP Control  
Remote Control  
Wireless DMX Control

## 103 • Lens&Gobos

Fresnel Lens System  
Spotlight Attachment  
Projection Attachment  
Projection Attachment Adapter

## 111 • Accessories

Softbox Series  
Collapsible Lantern  
Lighting Stands & Mounting  
Carrying Bags



# COBLIGHTS



ML60IIBi



22500Lux 5600K  
@1m with standard reflector



2800K-6500K

CRI  
**96+**

CRI 96+

TLCI  
**97+**

TLCI 97+

**526g**

Lightweight



11 FX Effects



Godox Light APP  
Control



Charging Case  
Powered by AC/DC

Key Features

- Super Lightweight & Compact Design
- One-Handed Outdoor Gear
- Smaller Bag Carrying Bigger Convenience
- high CRI/TLCI at 96+/97+
- 2800-6500K Color Temperature Range
- Upgraded Lamp Beads for Stunning Brightness
- 11 built-in FX effects
- Fuel Creativity With Versatile Accessories
- Adaptable Lighting in Any Space
- APP Control

Tech Specs

| Model                                  | ML60IIBi          |
|----------------------------------------|-------------------|
| Power Supply                           | 20V≈3.5A          |
| Input Power                            | Max. ≈70W         |
| Brightness Range                       | 0%-100%           |
| CRI                                    | Average≥96        |
| TLCI                                   | Average≥97        |
| CCT                                    | 2800-6500K        |
| FX Type                                | 11                |
| Bluetooth Control Distance             | Max.30m           |
| Working Environment Temperature        | -10°C ~+40°C      |
| Dimension                              | 3.46"*3.62"*4.38" |
| Net Weight                             | ≈526g             |
| (Lamp Head Protective Cover Included)≈ |                   |

Optional Purchase



ML60IIBi Kit 1

|               |    |                      |    |
|---------------|----|----------------------|----|
| Light Body    | ×1 | Adapter              | ×1 |
| Reflector     | ×1 | Lamp Head Protective |    |
| AD-E2 Bracket | ×1 | Cover                | ×1 |
| Carry Bag     | ×1 | AK-B01 NP-F Battery  |    |
| AC Power Cord | ×1 | Accessory Kit        | ×1 |



ML60IIBi Kit 2

|               |    |                        |    |
|---------------|----|------------------------|----|
| Light Body    | ×1 | Adapter                | ×1 |
| Reflector     | ×1 | Lamp Head Protective   |    |
| AD-E2 Bracket | ×1 | Cover                  | ×1 |
| Carry Bag     | ×1 | AK-B02 V-Mount Battery |    |
| AC Power Cord | ×1 | Accessory Kit          | ×1 |

Portable LED Video Light

ML100Bi



ML100Bi



34300Lux  
5600K@1m  
with ML-L15

CRI  
**97+**

CRI 97+

TLCI  
**98+**

TLCI 98+



2800K-6500K

**487g**

Lightweight



11 FX Effects



Godox Light APP  
Control



Type-C  
Power Supply



AC/DC  
Power Supply



Godox Mount

Key Features

- Weighs Only 487g
- 34,300lux @1m with Lens Reflector
- Wide CCT Range: 2800-6500K
- Portable Brilliance in Pocket-sized Design
- Diverse Power Supply: DC/USB-C/V-mount Battery
- Comprehensive Accessory System with Godox Mount
- Seamless Workflow with Godox Light App

Optional Purchase



ML100Bi (With Carry Bag)

|                            |    |               |    |
|----------------------------|----|---------------|----|
| Light Body                 | ×1 | AC Power Cord | ×1 |
| Lens Reflector ML-L15      | ×1 | Holder AD-E2  | ×1 |
| Adapter                    | ×1 | Storage Bag   | ×1 |
| Lamp Head Protective Cover | ×1 |               |    |



ML100Bi Kit1

|                   |    |                            |    |
|-------------------|----|----------------------------|----|
| Light Body        | ×1 | Lens Reflector ML-L15      | ×1 |
| Mini Tripod MT01  | ×1 | Storage Bag                | ×1 |
| Power Bank Holder |    | AC Power Cord              | ×1 |
| PH01 Adapter      | ×1 | Lens Reflector ML-L36      | ×1 |
| Holder AD-E2      | ×1 | Lamp Head Protective Cover | ×1 |



ML100Bi Kit2

|                       |    |                            |    |
|-----------------------|----|----------------------------|----|
| Light Body            | ×1 | AC Power Cord              | ×1 |
| Lens Reflector ML-L15 | ×1 | V-mount Battery Accessory  | ×1 |
| Holder AD-E2          |    | Kit AK-B02                 |    |
| Adapter               | ×1 | Storage Bag                | ×1 |
| Lens Reflector ML-L36 | ×1 | Lamp Head Protective Cover | ×1 |

Full Color LED Video Light

ML100R



ML100R



Compact & Portable



Full Color



Fun-packed  
Accessories



Versatile Power  
Options



Godox Mount

The ML100R is a lightweight, full-color light with versatile features. It offers portable light-shaping accessories, mobile power options, and innovative mixing technology. With full-color adjustability, it enables limitless creativity, making it ideal for filmmakers and content creators who need mobility and flexibility.

Key Features

- Innovative mixing technology for vibrant, accurate color
- Wide color temperature: 1800K-10000K
- Godox-Mount Ecosystem for seamless accessory integration
- Compact & portable design for easy mobility
- 5 power solutions for flexible operation
- New creative accessories: collapsible fresnel and air soft tube

Tech Specs

|                                 |                                           |
|---------------------------------|-------------------------------------------|
| <b>Model</b>                    | <b>ML100R</b>                             |
| DC Input Port                   | 20V=6A                                    |
|                                 | Input Power≈110W                          |
| CCT                             | 1800K-10000K                              |
| Brightness Range                | 0%-100%                                   |
| Dimming Curves                  | linear, S-curve, exponential, logarithmic |
| FX Mode                         | 14                                        |
| CRI                             | ≈95                                       |
| TLCI                            | ≈95                                       |
| Controlling Methods             | Bluetooth app/light body control          |
| Bluetooth Controlling Distance  | 30m                                       |
| Working Environment Temperature | -10°C~40°C                                |
| Dimension of Bare Light         | ≈4.8"×1.81"×4.33"                         |
| Net Weight of Bare Light        | ≈465g                                     |





ML80Bi/ML150Bi



Modular Design



Cable-Free Power Options



Magnetic Diffuser Kit



Godox Mount



Beam Zooming



NFC Addition

Key Features

- Modular Design for Smarter Solutions
- ML80Bi: 29600lux @1m/ML150Bi: 61054lux @1m (with ML-Z (spot)/5600K)
- Zoom Lens Reflector ML-Z
- Brand New Magnetic Accessories
- 3 Cable-Free Power Options
- Godox Mount Compatibility
- Compact and Portable
- NFC Addition and App/DMX Control

Tech Specs

| Model                           | ML80Bi                                                                                     | ML150Bi                                        |
|---------------------------------|--------------------------------------------------------------------------------------------|------------------------------------------------|
| Battery(ML-BA)                  | DC14.4V, 6600mAh, 95.04Wh / USB-C Charging<br>Port Input: 5V=3A, 9V=3A, 12V=2.5A, 20V=1.5A | /                                              |
| DC Input Port                   | 20V=6A                                                                                     | 36V=4.6A(Max.)                                 |
| USB-C Input Port                | 12V=1.5A, 15V=3A, 20V=5A                                                                   | /                                              |
| CCT Range                       | 2800K-6500K                                                                                | 2800K-6500K                                    |
| Brightness Range                | 0%~100%                                                                                    | 0%~100%                                        |
| FX Modes                        | 11                                                                                         | 11                                             |
| CRI                             | ≈96                                                                                        | ≈96                                            |
| TLCI                            | ≈96                                                                                        | ≈96                                            |
| Controlling Methods             | Bluetooth app/<br>light body                                                               | Wired DMX/RDM,<br>Bluetooth App,<br>Light Body |
| Bluetooth Controlling Distance  | 30m                                                                                        | 30m                                            |
| Working Environment Temperature | -10°C~40°C                                                                                 | -10°C~40°C                                     |
| Dimension of Bare Light         | ≈3.78"*3.58"*2.91"                                                                         | ≈3.58"*4.53"*3.58"                             |
| Net Weight of Bare Light        | ≈519g/1.14lb                                                                               | ≈770g/1.70lb                                   |

Optional Purchase



ML80Bi

|                          |    |                     |    |
|--------------------------|----|---------------------|----|
| Light Body               | ×1 | Holder AD-E2        | ×1 |
| Battery ML-BA            | ×1 | USB-C Charging Cord | ×1 |
| Zoom Lens Reflector ML-Z | ×1 | Storage Bag         | ×1 |
| Protection Cover         | ×1 | Instruction Manual  | ×1 |



ML150Bi

|                      |    |                                      |    |
|----------------------|----|--------------------------------------|----|
| Light Body           | ×1 | Storage Bag                          | ×1 |
| Protective Cover     | ×1 | Instruction Manual                   | ×1 |
| Power Cord           | ×1 | Zoom Lens Reflector ML-Z             | ×1 |
| Holder AD-E2 Adapter | ×1 | V-Mount Battery Adapter Plate ML-VMA | ×1 |

Optional Purchase



ML-CS30  
Collapsible Lantern Softbox



ML-SF50  
Octagon Softbox



AD-S60S  
60cm Softbox



ML-SF3030  
Square Softbox



ML-Z  
Zoom Lens Reflector



ML-L15  
Lens Reflector



ML-L36  
Lens Reflector



RF-ML45  
45° Reflector



ML-CD15  
Collapsible Diffusion Dome



ML-CS1625  
Collapsible Soft Tent



ML-GB  
Bowens Mount Adapter



DMX-C2  
DMX Adapter Cable



BG02  
Battery Grip



AK-B02  
V-Mount Battery Accessory Kit



AK-B01  
NPF Battery Accessory Kit



PH01  
Power Bank Holder



ML-BA  
Battery



ML-NPA  
NP-F Battery Adapter Plate



ML-VMA  
V-Mount Battery Adapter Plate

ML Series Accessories

Projection Attachment

ML-SP

ML-SP-19°  
Godox-mount LED Projection 19°

ML-SP-36°  
Godox-mount LED Projection 36°

ML-SP-50°  
Godox-mount LED Projection 50°

Accessories for ML-SP

SP-19°  
Projection Lens 19°

SP-36°  
Projection Lens 36°

SP-50°  
Projection Lens 50°

SP-DUST  
Projection Diffuser

SP-CTF  
Color Frame

SP-ID  
Iris Diaphragm

SP-CF  
Gobo Holder

Set MLP-11T  
CCT Adjustment

Set MLP-11C  
Color Effects

Gobo Set for ML-SP

Gobo Set  
SA-09-001

Gobo Set  
SA-09-002

Gobo Set  
SA-09-003

Gobo Set  
SA-09-004

Gobo Set  
MLP-GS

SL Series LED Light

SL60IID/SL60IIBi



The newly SL60IID and SL60IIBi are updated with stronger output, empowering your ideas. Controlling gets easier by connecting to the APP via Bluetooth. Changing between shooting spots becomes more convenient with its smaller size. Building a diverse ambiance comes more straightforward thanks to the bi-color version.

Key Features

- High maximum output of 18,600 Lux (SL60IID) and 25,100 Lux (SL60IIBi) at 1 meter with standard reflectors.
- Convenient control options including on board control, remote, APP, and DMX.
- Adjustable color temperature range from 2800K to 6500K (SL60IIBi).
- Built-in FX effects with 8 options (SL60IID) and 11 options (SL60IIBi).
- Compatible with a wide range of accessories through the Bowens mount.
- High color accuracy with CRI/TLCI ratings of 96+/97+.

Tech Specs

| Model                           | SL60IID                                          |
|---------------------------------|--------------------------------------------------|
| Power Supply                    | 100V-240V~50/60Hz 0.7A                           |
| Power                           | Max.70W                                          |
| CCT                             | 5600±200K                                        |
| Channel                         | 32                                               |
| Group                           | 16 (A,B,C,D,E,F,0-9)                             |
| ID                              | 1-99/OF                                          |
| CRI                             | ≥96                                              |
| TLCI                            | ≥97                                              |
| FX Type                         | 8                                                |
| Control Method                  | 2.4GHz Wireless/Bluetooth/<br>Light Body Control |
| 2.4GHz Transmission Distance    | ≈30m                                             |
| Bluetooth Transmission Distance | ≈30m                                             |
| Brightness Range                | 0%-100%                                          |
| Working Environment Temperature | -10°C-40°C                                       |
| Dimension                       | 140*236*215mm                                    |
| (unfolded without reflector)    |                                                  |
| Net Weight≈                     | 1.43kg                                           |

| Model                           | SL60IIBi                                         |
|---------------------------------|--------------------------------------------------|
| Power Supply                    | 100V-240V~50/60Hz 0.75A                          |
| Power                           | Max.75W                                          |
| CCT                             | 2800K-6500K                                      |
| Channel                         | 32                                               |
| Group                           | 16 (A,B,C,D,E,F,0-9)                             |
| ID                              | 1-99/OF                                          |
| CRI                             | ≥96                                              |
| TLCI                            | ≥97                                              |
| FX Type                         | 11                                               |
| Control Method                  | 2.4GHz Wireless/Bluetooth/<br>Light Body Control |
| 2.4GHz Transmission Distance    | ≈30m                                             |
| Bluetooth Transmission Distance | ≈30m                                             |
| Brightness Range                | 0%-100%                                          |
| Working Environment Temperature | -10°C-40°C                                       |
| Dimension                       | 140*236*215mm                                    |
| (unfolded without reflector)    |                                                  |
| Net Weight≈                     | 1.5kg                                            |



For those pursuing the best power out of limited budget, Godox has SL100D and SL100Bi for you. Compact unit with high brightness, SL100 twins work well for small space lighting. Daylight SL100D as basic solution while the Bi-color SL100Bi for more creativity. Bowens mount makes it easier to choose accessories. Want to gain popularity as a Youtuber, live streamer, content creator or commercial producer, Lighting with SL100 will be a good start.

Key Features

- Dependable 5600K SL100D and variable (2800~6500K) SL100Bi feature a high CRI/TLCI rating of 96/97 that translates to advanced accuracy in color rendering.
- SL100D offers Lightning 1/2/3, Flash, Conference, Paparazzi, Television, and Broken Bulb , and based on that SL100Bi has 3 additional light effects: Candle, Fire, Firework.
- With its compact design, you can freely use it in home or small studio settings.
- Bowens front accessory mount allows use of Godox modifiers and those of the many manufacturers that use this popular mount.
- Dual dials and clearly marked buttons offer intuitive user interface
- The SL100D/SL100Bi functions can be adjusted on the fixture, with a smartphone using the Godox Light App, or with an optional wireless remote.



2800K-6500K  
(SL100Bi)



0-100% Brightness  
Adjustment



Godox Light App  
Control



SL100Bi: 11  
SL100D: 8

Tech Specs

| LED Light                                                           | SL100D                       | SL100Bi     |
|---------------------------------------------------------------------|------------------------------|-------------|
| Power Supply                                                        | AC100V~240V(50/60Hz)         |             |
| Output Power                                                        | 100w                         |             |
| Channel                                                             | 32                           | 2800K~6500K |
| Group                                                               | 16(0~9/A B C D E F)          |             |
| ID                                                                  | OFF/1-99                     |             |
| Color Temperature                                                   | 5600K                        |             |
| Light Adjustment Range                                              | 0%-100%                      |             |
| 100% Illuminance(LUX) (with standard reflector,testing distance,1m) | ≈32100                       |             |
| CRI                                                                 | ≥96                          | 11          |
| TLCI                                                                | ≥97                          |             |
| Temperature of Working Environment                                  | -10°-40°                     |             |
| Light Effect Mode                                                   | 8                            |             |
| Control Method                                                      | Smartphone APP/2.4G Wireless |             |
| Bluetooth Transmission Distance                                     | ≈30m                         |             |
| 2.4G Wireless Transmission Distance                                 | ≈30m                         |             |
| Beam Angle                                                          | 120°                         |             |
| Dimension                                                           | 243*205*127mm                |             |

SL100D-K2

|                      |    |
|----------------------|----|
| SL100D               | ×2 |
| 304 Light Stand      | ×2 |
| SB-BW-6090 Softbox   | ×2 |
| RC-A6 Remote Control | ×1 |
| CB-04 Carrying Bag   | ×1 |



SL100Bi-K2

|                      |    |
|----------------------|----|
| SL100Bi              | ×2 |
| 304 Light Stand      | ×2 |
| SB-BW-6090 Softbox   | ×2 |
| RC-A6 Remote Control | ×1 |
| CB-04 Carrying Bag   | ×1 |



SL Series LED Video Light

SL150III/SL200III/SL300III  
SL150IIIBi/SL200IIIBi/SL300IIIBi



While Godox always keeps pursuing progress, the SL series has evolved to provide a more convenient and efficient experience. Inheriting the excellent quality and performance of the predecessor, now the SLIII (SL150III/SL150IIIBi/SL200III/SL200IIIBi/SL300III/SL300IIIBi) comes with the added Godox Light App control, offering you more flexibility on set. It's an ideal solution for live streaming, broadcasting, and other video applications.

Key Features

- Stepless adjustment from 0% to 100%.
- Optional Daylight version or Bi-color version.
- Silent mode especially suitable for sound-sensitive applications.
- High CRI/TLCI rating ≈96/97
- The rotatable U-shaped yoke offers excellent flexibility and can be used with most light stands.
- Multiple control methods including onboard control, wireless remote control and Godox Light App control.
- Built-in FX effects.
- Bowens mount for wide compatibility.

Tech Specs

| Model                           | SL150III                                                | SL200III              | SL300III              | SL150IIIBi            | SL200IIIBi            | SL200IIIBi            |
|---------------------------------|---------------------------------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Power Supply                    | 100V-240V<br>~50/60Hz                                   | 100V-240V<br>~50/60Hz | 100V-240V<br>~50/60Hz | 100V-240V<br>~50/60Hz | 100V-240V<br>~50/60Hz | 100V-240V<br>~50/60Hz |
| Output Power                    | Max. 160W                                               | Max. 215W             | Max. 330W             | Max. 160W             | Max. 215W             | Max. 330W             |
| CCT                             | 5600K±200K                                              | 5600K±200K            | 5600K±200K            | 2800K-6500K           | 2800K-6500K           | 2800K-6500K           |
| TLCI                            | ≈97                                                     |                       |                       |                       |                       |                       |
| CRI                             | ≈96                                                     |                       |                       |                       |                       |                       |
| Brightness Range                | 0%-100%                                                 |                       |                       |                       |                       |                       |
| Channel                         | 32(1-32)                                                |                       |                       |                       |                       |                       |
| Group                           | 16(A, B, C, D, E, 0-9)                                  |                       |                       |                       |                       |                       |
| ID                              | 99(01-99)                                               |                       |                       |                       |                       |                       |
| Control Method                  | 2.4GHz Control/Bluetooth APP Control/Light Body Control |                       |                       |                       |                       |                       |
| 2.4GHz Control Distance         | ≈50m                                                    |                       |                       |                       |                       |                       |
| Bluetooth Control Distance      | ≈30m                                                    |                       |                       |                       |                       |                       |
| Working Environment Temperature | -10°C~40°C                                              |                       |                       |                       |                       |                       |
| Dimension (excluding reflector) | 34*20*16cm                                              | 36.7*20*16cm          | 36.2*19.4*31cm        | 19.9*28.5*28.8cm      | 19.9*31.1*29.5cm      | 19.9*35.6*31.6cm      |
| Net Weight                      | ≈2.8kg                                                  | ≈3kg                  | ≈3.6kg                | ≈3.1kg                | ≈3.25kg               | ≈3.59Kg               |

Video Flash Light


FL15Bi



FL15Bi

Key Features

- Weighing 253g with a compact size
- Uniform light mixing
- A "digital brush" with TORCH mode
- IP54 Weather Resistent
- Includes a silicone zoom lens & a barndoor
- CRI≈97/TLCI≈98/CCT 2800K-6500K
- Unlock 11 FX effects via the Godox Light App
- An internal cooling fan design

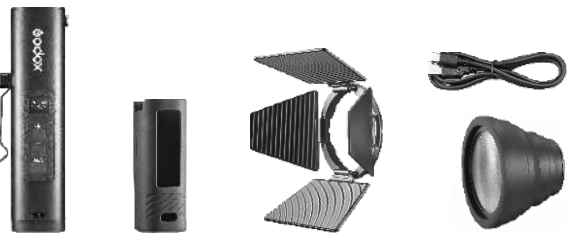

|                      |    |                 |    |
|----------------------|----|-----------------|----|
| Light Body           | ×1 | Zoom Lens       | ×1 |
| Barndoor             | ×1 | Silicone Sleeve | ×1 |
| USB-C Charging Cable | ×1 |                 |    |

Separately Sold Accessories




LM-L5  
Zoom Lens Reflector

Tech Specs

| Model                            | FL15Bi                                                                 |
|----------------------------------|------------------------------------------------------------------------|
| Lithium Battery                  | 3.63V, 4750mAh, 17.2425Wh<br>≈2h 25min<br>Runtime≈1h (100% brightness) |
| USB-C Port                       | Input: 5V=3A, 9V=2A, 17W (Max.)                                        |
| Brightness Range                 | 0%~100%                                                                |
| CCT Range                        | 2800K~6500K                                                            |
| CRI                              | ≈97                                                                    |
| TLCI                             | ≈98                                                                    |
| Ingress Protection Rating        | IP54                                                                   |
| Bluetooth Controlling Distance   | Max.30m                                                                |
| Working Environment Temperature  | -10°C~35°C                                                             |
| Dimension (without accessories)  | ≈1.77"*1.42"*5.71"                                                     |
| Net Weight (without accessories) | ≈253g                                                                  |



# RS SERIES

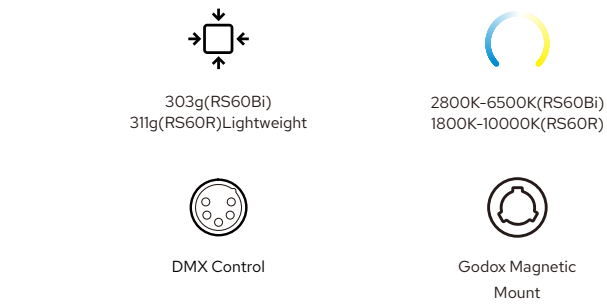

Introducing the RS60Bi/R, a revolutionary addition to the Godox lineup. The 311g compact body integrates optimized 18mm LED beads, delivering 60W of power and full color with 91% Rec.2020 color gamut coverage. The all-new Godox magnetic mount seamlessly integrates with the Godox Optical Ecosystem, enabling versatile lighting effects. When paired with the SZL2 aspheric zoom lens, the RS60Bi/R is compatible with the optical accessories of the S60Bi. The RS60Bi/R comes with a detachable battery and an all-in-one GaN power adapter included in the kit.

Key Features

- All-new Godox magnetic mount.
- Lightweight Body with 303g(RS60Bi)/311g(RS60R).
- 60W Power Supply.
- Multiple Modes: CCT, HSI,RGBW, and FX.
- CCT range from 2800K to 6500K(RS60Bi)/1800K to 10000K (RS60R).
- Paired with the SZL2 zoom lens, compatible with S60Bi optical accessories.
- Seamless Integration with Godox Optical Ecosystem.
- Removable fast-charging battery and GaN power adapter.
- Power Options: AC ,DC 48V, USB-C ,NPF battery, V-mount batteries.
- Complete Godox Lighting Ecosystem.
- Powered via E27 socket, blending into scenes as downlights, spotlights, or stage lights.
- Wired DMX connection/RDM protocol/Bluetooth app control.

Tech Specs

| Model                                | RS60Bi                                                      | RS60R        |
|--------------------------------------|-------------------------------------------------------------|--------------|
| Lithium Battery Parameters           | DC14.4V · USB-C Inp ut:5V≈3A, 9V≈A, 12V≈2.5A, 20V≈1.5A      |              |
| Light Body USB-C Port Input          | 20V≈3A Max 60W                                              |              |
| CCT                                  | 2800K-6500K                                                 | 1800K-10000K |
| Brightness Range                     | 0%-100%                                                     |              |
| Dimming Curves                       | linear, S-curve, exponential,logarithmic                    |              |
| FX Mode                              | 11                                                          | 14           |
| CRI                                  | Average≥97                                                  | Average≥95   |
| TLCI                                 | Average≥98                                                  | Average≥95   |
| Controlling Methods                  | DMX controller, support RDM protocol/ Bluetooth app control |              |
| Bluetooth Controlling Distance       | 60m                                                         |              |
| Working Environment Temperature      | -20°C~40°C                                                  |              |
| Dimension                            | ≈3.03"*3.03"*3.58"                                          |              |
| (without lens reflector and battery) |                                                             |              |
| Netweight                            | ≈303g                                                       | ≈311g        |
| (without lens reflector and battery) |                                                             |              |


What's inside

RS60R/Bi



Optional Purchase

RS60R 1K (1 Light Kit)

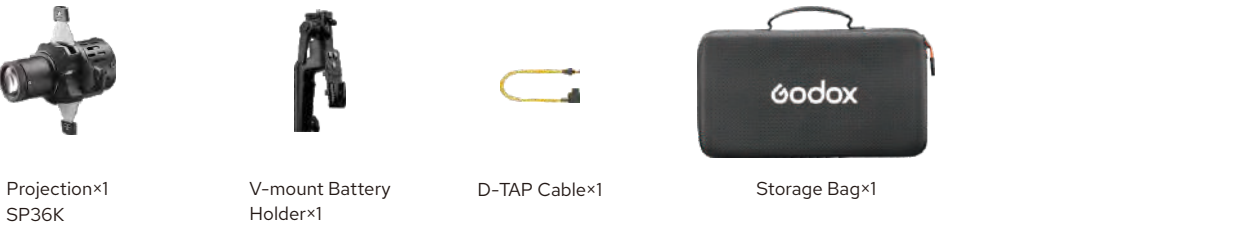

RS60R/Bi 2K (2 Lights Kit)



Full/Bi Color LED Video Light

RS100R/RS100Bi



RS100Bi




RS100R

  
2800K-6500K(RS100Bi)  
1800K-10000K(RS100R)

**52 Mins**  
52mins Runtime  
at 100% Brightness

**28,600 Lux**  
28,600lux @1m  
(5600K)

  
One-Piece  
Outdoor-Ready Light

**0.1%**  
Brightness Adjustment

  
Godox S-Mount

  
DMX Control

  
NFC Tap-to-Pair

Key Features

- Godox S-Mount compatibility.
- 28,600 lux in a compact design.
- 2800K-6500K(RS100Bi)/1800K-10000K(RS100R) CCT with HSI, RGBW, X-Y, Gel, and FX modes.
- Built-in battery delivers 52mins of full-output.
- 1/4" threaded hole offers flexible mounting options across stands, rigs, and cages.
- NFC Addition and App/DMX-C2 Control.

Tech Specs

| Model                               | RS100Bi                                      | RS100R       |
|-------------------------------------|----------------------------------------------|--------------|
| USB-C Port                          | Input: 28V=5A                                |              |
| GM Adjust                           | /                                            | -100%-100.0% |
| Brightness Range                    | 0.0%-100.0%                                  |              |
| Dimming Curves                      | linear, S-curve, exponential, logarithmic    |              |
| FX Modes                            | 11                                           | 14           |
| CRI                                 | ≈98                                          | ≈90          |
| TLCI                                | ≈98                                          | ≈92          |
| Controlling Methods                 | Wired DMX/RDM, Bluetooth, Light Body Control |              |
| Bluetooth Controlling Distance      | 30m                                          |              |
| Working Environment Temperature     | -10℃~40℃                                     |              |
| Dimension (without lens reflector)  | 9.21"×3.07"×3.07"/234×78×78mm                |              |
| Net Weight (without lens reflector) | 886g/1.95lb                                  | 921g/2.03lb  |

Optional Purchase



|                      |    |                |    |
|----------------------|----|----------------|----|
| Light Body           | ×1 | Lens Reflector | ×1 |
| Holder AD-E2         | ×1 | Storage Bag    | ×1 |
| USB-C Charging Cable | ×1 |                |    |



|                      |    |                  |    |
|----------------------|----|------------------|----|
| Light Body           | ×1 | Lens Reflector   | ×1 |
| Holder AD-E2         | ×1 | Storage Bag      | ×1 |
| USB-C Charging Cable | ×1 | Projection SP36K | ×1 |

RS Series Accessories

Godox S-Mount Accessories

  
Lens Reflector

  
SZL2  
Zoom Lens

  
AK-SN  
Snoot

  
SR15  
15° Reflector

  
SD15  
Collapsible Diffusion Dome

  
MK  
Magnetic Kit

  
S20  
Beam Reflector

  
DL5 Lite  
Parallel Beam Booster

  
SP1  
Parabolic Softbox

  
SS11  
Rectangular Softbox

  
SO2  
Octa Softbox

  
SL1  
Lantern Softbox

Godox S-Mount Accessories Projection Attachment

  
SP36K  
36° Projection Attachment


  
SP50K  
50° Projection Attachment

  
SP-ID  
Iris Diaphragm

  
SP-CF  
Gobo Holder

  
SP-CTF  
Color Frame

  
SA-11T  
CCT Adjustment Set

  
SA-09-001  
Gobo Set

  
SA-09-002  
Gobo Set

  
SA-09-003  
Gobo Set

  
SA-09-004  
Gobo Set

  
SA-11C  
Color Effects Set

Power Solution

\*Not compatible with RS100Bi/R

  
MS60BAT01  
Battery

  
MS60PA01  
Power Adapter

  
MS60NPA  
NPF Battery Adapter

Cables

  
DMX-C2  
DMX Adapter Cable

**Cross-Series  
Accessory Support**

  
SZL2  
Zoom Lens


Compatible with accessories of S30/S60  
focusing light when using Zoom Lens SZL2

  
SA-P  
Projection Attachment

  
SA-01  
85mm Lens

  
SA-02  
60mm Lens

  
SA-03  
150mm Telephoto Lens

  
SA-08  
Barndoor

  
SA-30  
Rectangular Softbox

  
SA-07  
Framing Shutter

  
SA-06  
Iris Diaphragm

  
SA-10  
Gobo Holder

  
SA-09  
Gobo Set

  
SA-05  
Scrim Set

  
SA-11C  
Color Filters of  
Color Effects Set

  
SA-11T  
Color Filters of Color  
Temperature Adjustment Set



TRAIN STATION  
Godox

WAY OUT EXIT

SHINE

FOCUSING  
LIGHTS



S60Bi

Key Features

- Beam angle from 6 to 55 degrees, light where you want
- Variable Color Temperature
- High color rendering CRI/TLCI rating of 96+/97+
- Lighting FX
- Silent mode
- Control by Godox Light app, remote RC-A6 or DMX

Tech Specs

| Model                      | S60Bi                                                                                         |
|----------------------------|-----------------------------------------------------------------------------------------------|
| Power Supply               | AC Power Supply100~240V 50/60HZ 0.9A MAX<br>V-port battery Standard voltage: 14.8V (optional) |
| Output Power               | 77W (Max)                                                                                     |
| Color Temperature          | 2800-6500K                                                                                    |
| CRI                        | ≈96                                                                                           |
| TLCI                       | ≈97                                                                                           |
| Brightness Range           | 0~100%                                                                                        |
| Channel(CH)                | 32 (1 to 32)                                                                                  |
| Group (GR)                 | 16 (A to F/0 to 9)                                                                            |
| Beam Angle                 | 6°-55°                                                                                        |
| Working Environment        | -10~40°C                                                                                      |
| Temperature                |                                                                                               |
| Control Method             | Smartphone APP/2.4G wireless/remote/control/<br>DMX control                                   |
| 2.4G Wireless Transmission | 50m                                                                                           |
| Distance(≈)                |                                                                                               |
| Dimension(≈)               | Light body: 264*107*100mm<br>Controller: 233*112*61mm                                         |
| New weight(≈)              | Light body: 1.36kg<br>Controller: 1kg                                                         |

More Features of S60 Series



S60Bi-K3 Three-light Kit

- |                         |    |                                  |    |
|-------------------------|----|----------------------------------|----|
| 1.Light Head            | ×3 | 13.SA-IIC Color Filters of       | ×1 |
| 2.Wrench                | ×1 | Color Effects Set                |    |
| 3.Power Cord            | ×3 | 14.SA-IIT Color Filters          | ×1 |
| 4.Connect Cable         | ×3 | of Color Temperature             |    |
| 5.Controller Box        | ×3 | Adjustment Set                   |    |
| 6.SA-30 Softbox         | ×2 | 15.SA-P Projection Attachment ×1 |    |
| 7.SA-05 Scrim Set       | ×1 | (included a SA-01 85mm lens)     |    |
| 8.SA-06 Iris Diaphragm  | ×1 | 16.CB52 Carrying Bag             | ×1 |
| 9.SA-07 Framing Shutter | ×1 | for Light Stand                  |    |
| 10.SA-08 Barndoor Set   | ×3 | 17.Remote Control RC-A6          | ×1 |
| 11.SA-09 GOBO Set       | ×1 | 18.213B Light Stand              | ×3 |
| 12.SA-10 GOBO Holder    | ×1 | 19.CB51 Carrying Case for Kit    | ×1 |




Abundant Accessories



SA-08 Barndoor Set



SA-30/SA-20 Softbox

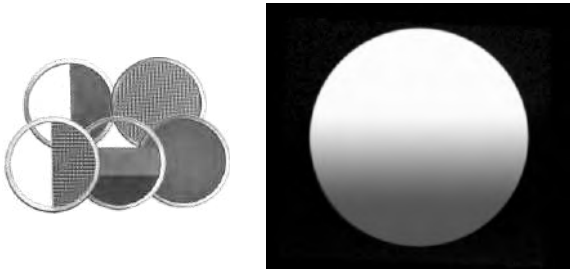

SA-05 Scrim Set



SA-07 Scrim Set



SA-06 Iris Diaphragm



SA-09 GOBO set



SA-11C/SA-11T Colors gels

Projection attachment: project a highly focused and controlled beam of light.This attachment is what enables you to get the utmost out of creativity of Focusing light series for it is specially designed for fitting a vast range of light shaping accessories.



SA-P Projection Attachment (included a SA-01 85mm Lens) SA-01 85mm Lens SA-02 60mm Wide-angle Lens SA-03 150mm Telephoto Lens


SA-01 85mm Lens SA-P Projection (included a SA-01)

# PANEL LIGHTS





SINGLE  
1×2



DUAL-HORIZONTAL  
2×2



DUAL-VERTICAL  
1×4

Key Features

- Delivers powerful, soft output—20,400 lux @1m.
- Combines a slim-profile design with a Quick-Release Mounting System.
- Flexible mounting options support rapid setup and teardown.
- 1800K–10,000K CCT with FX, HSI, RGBW, and GEL modes.
- High color rendering CRI/TLCI rating of ≈97/98.
- Full-metal housing enables efficient cooling and stable output.
- App control with NFC pairing and optional DMX-TRSI support.
- Direct V-mount power.
- Supports dual-Light expansion with the controller (UP-C300).



UP150R

|                                  |    |                       |    |
|----------------------------------|----|-----------------------|----|
| Light Body (UP150R)              | ×1 | AC Power Cord         | ×1 |
| Controlling Cable                | ×1 | Controller (UP-C150)  | ×1 |
| Rectangular Softbox (UP150RRS12) | ×1 | Shoulder Strap (Ss01) | ×1 |
| Adapter Holder (AH-02)           | ×1 | Storage Bag (Sc29)    | ×1 |
| 5/8" Baby Pin (UP150RBP01)       | ×1 |                       |    |

Optional Purchase

|                                          |                                  |                                         |                                          |
|------------------------------------------|----------------------------------|-----------------------------------------|------------------------------------------|
|                                          |                                  |                                         |                                          |
| UP150RUH01<br>Universal Swivel<br>Holder | DMX-TRSI<br>DMX Adapter<br>Cable | UP150RSC02<br>Straight Connector<br>1*4 | UP150RRS14<br>Rectangular Softbox<br>1*4 |

Tech Specs

| Model                           | UP-C150                                          | UP150R              |
|---------------------------------|--------------------------------------------------|---------------------|
| AC INPUT Port                   | 100V~240V~50/60Hz.180W                           | /                   |
| CCT Range                       | 1800K~10000K                                     | /                   |
| GM Adjust                       | -100%~100%                                       | /                   |
| Brightness Range                | 0.0%~100.0%                                      | /                   |
| Dimming Curves                  | linear, S-curve, exponential, logarithmicv       | /                   |
| Controlling Methods             | Wired DMX/RDM, Bluetooth app, controller control | /                   |
| Bluetooth Controlling Distance  | 30m                                              | /                   |
| USB-A Port                      | Firmware Upgrade/5V-1A Power Supply              | /                   |
| CRI                             | /                                                | ≈97                 |
| TLCI                            | /                                                | ≈98                 |
| Working Environment Temperature | -20°C ~ 45°C                                     | -20°C ~ 45°C        |
| Dimension                       | ≈4.09"*2.95"*6.3"                                | 13.94"*0.95"*26.77" |
| Net Weight                      | ≈0.85kg/1.87lb                                   | ≈3.2kg/7.05 lb      |



UP150R Kit 2

|                                     |    |                      |    |
|-------------------------------------|----|----------------------|----|
| Light Body(UP150R)                  | ×1 | AC Power Cord        | ×1 |
| Adapter Holder(AH-02)               | ×1 | Controlling Cable    | ×1 |
| Rectangular Softbox 2*2(UP150RRS22) | ×1 | Shoulder Strap(SS01) | ×1 |
| Straight Connector 2*2(UP150RSC01)  | ×1 | Storage Bag(SC30)    | ×1 |
| UP-C300 Controller                  | ×1 |                      |    |



P260C Pro

Key Features

- High Power, High Brightness
- Enhanced Diffuser for Softer Light
- Ultra-Thin Design
- Lithium battery/USB-C/DC power supply
- 2800K-6500K
- CRI/TLCI 98+
- Smart Lighting Control

Tech Specs

|                                 |                                      |
|---------------------------------|--------------------------------------|
| Model                           | P260C Pro                            |
| CCT                             | 2800K-6500K                          |
| Input Power                     | 45W                                  |
| CRI                             | Average≥98                           |
| TLCI                            | Average≥98                           |
| Controlling Methods             | Bluetooth Control/Light Body Control |
| Working Environment Temperature | -10°C~+35°C                          |
| Dimension (including handle)    | ≈328*323*42mm                        |
| Net Weight (including handle)   | ≈1.2kg                               |

|                                                                                       |    |                                                                                       |    |
|---------------------------------------------------------------------------------------|----|---------------------------------------------------------------------------------------|----|
|  | x1 |  | x1 |
|  | x1 |  | x1 |



LED Video Light

LDP8Bi/LDP18Bi



Key Features

- The unique mounted LED chips make the emitted light even softer.
- Enjoy the ultra-light design for easy shooting on location.
- High color accuracy with TLCI ratings of 95+.
- Adjustable color temperature ranges from 2800K to 6500K.
- Built-in FX effects with 31 options.
- Stable output with 0% to 100% brightness range.
- Support DC power supply/NP-F battery power supply.



Tech Specs

| Model                           | LDP8Bi                                                                    | LDP18Bi      |
|---------------------------------|---------------------------------------------------------------------------|--------------|
| DC Inputs                       | 5V≈2A                                                                     | 12V≈2A       |
| Input Power                     | ≈10W                                                                      | ≈22W         |
| Power Supply                    | DC power supply/NPF battery power supply (NPF battery is sold separately) |              |
| Brightness                      | 0%-100%                                                                   | 0%-100%      |
| Ra                              | average≥96                                                                | average≥96   |
| TLCI                            | average≥98                                                                | average≥97   |
| Working Environment Temperature | -10℃~40℃                                                                  | -10℃~40℃     |
| CCT                             | 2800-6500K                                                                | 2800-6500K   |
| Dimension                       | 147*105*33mm                                                              | 210*149*31mm |
| Net Weight≈                     | 194g                                                                      | 363g         |

RGBWW Panel Light

LDX50R/50Bi/100R/100Bi



Key Features

- Detachable diffuser for customizable lighting options.
- The metal structure on the back ensures heat dissipation without noisy fans and enhances durability for long-term usage.
- Bi-color version with five preconfigured color temperatures (2800K/3200K/4300K/5600K/6500K) for easy application.
- Adjustable color temperature range: 2800K to 6500K (LDX50Bi/100Bi) and 2500K to 10000K (LDX50R/100R).
- Built-in FX effects with 11 types (LDX50Bi/100Bi) and 14 types (LDX50R/100R).
- Convenient control options: panel, remote control, and APP.
- Multiple power supply options: NP-F battery, V-mount battery, and DC power.

Optional Purchase

LDX50Bi/LDX50R



LDX100Bi/LDX100R



Tech Specs

| Model                           | LDX50R                                                       | LDX100R      | LDX50Bi                                                      | LDX100Bi     |
|---------------------------------|--------------------------------------------------------------|--------------|--------------------------------------------------------------|--------------|
| Power Supply                    | 20V≈3.5A                                                     | 20V≈6A       | 20V≈3.5A                                                     | 20V≈6A       |
| Total Power                     | Max.63W                                                      | Max.118W     | Max.65W                                                      | Max.120W     |
| CCT                             | 2500K-10000K                                                 |              | 2800K-6500K                                                  |              |
| Brightness Range                | 0%-100%                                                      |              | 0%-100%                                                      |              |
| FX Type                         | 14                                                           |              | 11                                                           |              |
| CRI                             | Average≥96                                                   |              | Average≥96                                                   |              |
| TLCI                            | Average≥96                                                   |              | Average≥96                                                   |              |
| Channel                         | 32(1-32)                                                     |              | 32(1-32)                                                     |              |
| Group                           | 16(A-F, 0-9)                                                 |              | 16(A-F, 0-9)                                                 |              |
| ID                              | 99(1-99)                                                     |              | 99(1-99)                                                     |              |
| Controlling Method              | 2.4G remote control/Bluetooth APP Control/Light body control |              | 2.4G remote control/Bluetooth APP Control/Light body control |              |
| 2.4G Controlling Distance       | Max.50m                                                      |              | Max.50m                                                      |              |
| Bluetooth Control Distance      | Max.30m                                                      |              | Max.30m                                                      |              |
| U-type Bracket Adjustable Angle | 360°                                                         |              | 360°                                                         |              |
| Working Environment Temperature | -20℃~+40℃ (in DC power supply)                               |              | -20℃~+40℃ (in DC power supply)                               |              |
| Dimension                       | 357*305*75mm                                                 | 417*468*63mm | 357*305*75mm                                                 | 417*468*63mm |
| Net Weight≈                     | 1.86kg                                                       | 3.24kg       | 1.85kg                                                       | 3.26kg       |



LED1000Bi II

LED1000D II

LED1000D II/LED1000Bi II video lights are excellent for product shooting, photojournalistic and video recording, etc. It provides a wide spectrum, beautifully soft and even illumination for photography.

Key Features

- Premium LED bulbs and wide screen offer high brightness
- Three models create various light effects
- Three control options to wirelessly adjust brightness or color temperature
- Lithium battery or DC charged



Tech Specs

| LED Video Light       | LED1000DII (daylight version)                       | LED1000BiII (Bi-color version)                     |
|-----------------------|-----------------------------------------------------|----------------------------------------------------|
| Lithium Battery       | 14.8V Lithium battery (BP-L model)(sold separately) |                                                    |
| DC Power Supply       | 13~16.8V                                            |                                                    |
| Channel               | 16                                                  |                                                    |
| Group                 | 6 (A, B, C, D, E, F)                                |                                                    |
| Power                 | Max. 70W                                            |                                                    |
| Color Temperature     | 5600K±300K                                          | 3300K~5600K±300K                                   |
| 100% Brightness(Lux)≈ | 5400 @1m                                            | 4800 @1m/4200K<br>2200 @1m/3300K<br>2600 @1m/5600K |
| CRI≈                  | 96                                                  |                                                    |
| TLCI≈                 | 98                                                  |                                                    |
| Dimming Range         | 0%~100%                                             |                                                    |
| LED Beads Quantity    | 1024                                                | 5600K: 512/3300K: 512                              |
| Operation Temperature | -10~40℃                                             |                                                    |
| Dimension             | 430*460*100mm                                       |                                                    |
| Net Weight            | 2.51Kg                                              |                                                    |
| Remote Control        | RC-A5II                                             |                                                    |
| Power Supply          | 3.0V(AAA*2)(not included)                           |                                                    |
| Wireless Frequency    | 433MHz                                              |                                                    |
| Distance (Open Area)  | 20m                                                 |                                                    |
| Channel               | 16                                                  |                                                    |
| Group                 | 6 (A, B, C, D, E, F)                                |                                                    |
| Standby Time          | More than one year                                  |                                                    |
| Operation Temperature | -10~40℃                                             |                                                    |
| Dimension             | 120*38*15mm                                         |                                                    |
| Net Weight            | 30g                                                 |                                                    |




LEDP120C




LEDP260C

Key Features

- High-quality LED blubs
- Using lithium battery with great portability
- Soft and even illumination
- Included with a L-type bracket
- Fits almost any cameras and camcorders

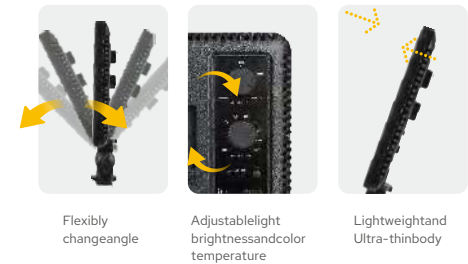

- With the wide spectrum, soft light and accurate color temperature
- Wireless grouping system (6 groups & 16 channels)
- Adjustable light brightness and color temperature
- Lithium battery or DC charged
- Large-sized LCD panel and settings auto saved
- Include a detachable handle and AC adapter

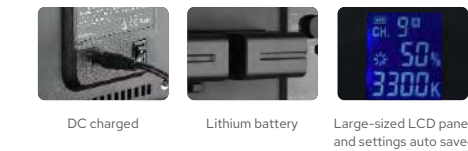

Tech Specs

| LED Light              | LEDP120C                                                       | LEDP260C                                                                                 |
|------------------------|----------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Power Supply           | 7.4V Lithium Battery (NP-F970 model lithium battery)(optional) | 7.4V Lithium Battery (NP-F970 model lithium battery)(optional) DC Power Supply: 13-16.8V |
| Power                  | Max.12W                                                        | Max.30W                                                                                  |
| Channel                | 16                                                             |                                                                                          |
| Group                  | 6(A, B, C,D, E, F)                                             |                                                                                          |
| Color Temperature      | 3300K~5600K±300K                                               |                                                                                          |
| Brightness(LUX)        | 580(0.5m/4500K)<br>630(0.5m/3300K)<br>680(0.5m/5600K)          | 2050 (0.5m/4500K)<br>2050 (0.5m/3300K)<br>2200 (0.5m/5600K)                              |
| Dimming Range          | 10%~100%                                                       |                                                                                          |
| CRI                    | ≥95                                                            | ≥95                                                                                      |
| TLCI                   | ≥95                                                            | ≥94                                                                                      |
| Operating Temperature  | -10~40℃                                                        |                                                                                          |
| Package Weight         | 220g                                                           | 917g                                                                                     |
| Box Dimensions (LxWxH) | 175*130*17mm                                                   | 360*240*27mm                                                                             |
|                        | not with the L-type Bracket                                    |                                                                                          |

| Remote Control        | RC-A5                     |
|-----------------------|---------------------------|
| Power Supply          | 3.0V(AAA*2) (not include) |
| Wireless Frequency    | 433MHz                    |
| Distance (emptiness)  | 20m                       |
| Channel               | 16                        |
| Group                 | 6 groups(A/B/C/D/E/F)     |
| Standby Time          | Over one year             |
| Operation Temperature | -10~50℃                   |
| Dimension             | 120*38*15mm               |
| Net weight            | 30g                       |





FH50R

FH50Bi

Key Features

- Swiftly shape illuminating areas with a secure metal frame after a single bend.
- Ultra-portable handheld design supports your on-the-go shootings.
- Color temperature from 2500K to 10000K(FH50R) and 2800K to 6500K(FH50Bi).
- HSI Mode in FH50R.
- 14 FX Effects in FH50R and 11 in FH50Bi.
- Control methods: APP/remote control/on board control.
- Power supply: AC adapter/V-mount battery/NPF battery.



FH50Bi



Light Body  
Carry Bag  
Adapter



x1  
x1  
x1



Stand Adapter  
AC Power Cord

x1  
x1

FH50R



Light Body  
Carry Bag  
Adapter



x1  
x1  
x1



Stand Adapter  
AC Power Cord

x1  
x1

Optional Purchase



Rectangular  
Softbox FS50



Pancake  
Lantern FP50



Handheld  
Powering  
Accessory  
Kit ML-AK




AK-B01  
NP-F Battery  
Accessory Kit



AK-B02  
V-Mount  
Battery  
Accessory Kit

Tech Specs

| Model                           | FH50R                                                      | FH50Bi      |
|---------------------------------|------------------------------------------------------------|-------------|
| Adapter Output Voltage          | 16.8V                                                      |             |
| Input Power                     | Max.≈62W                                                   |             |
| NPF Battery Specifications      | 7.2V-8.4V≈*2                                               |             |
| (available separately)          |                                                            |             |
| V-mount Battery Specifications  | 14.8V≈                                                     |             |
| (available separately)          |                                                            |             |
| Color Temperature               | 2500K~10000K                                               | 2800K~6500K |
| Brightness Range                | 0%-100%                                                    |             |
| FX Type                         | 14                                                         | 11          |
| CRI                             | Average≥96                                                 | Average≥97  |
| TLCI                            | Average≥96                                                 | Average≥97  |
| Channel                         | 32(1~32)                                                   |             |
| Group                           | 16(A-F, 0-9)                                               |             |
| ID                              | 99: 1-99                                                   |             |
| Mode                            | CCT/HSI/FX                                                 | CCT/FX      |
| Controlling Method              | 2.4G Wireless Control/Bluetooth APP/<br>Light Body Control |             |
| 2.4G Wireless Control Distance  | Max.50m                                                    |             |
| Bluetooth Transmission Distance | Max.30m                                                    |             |
| Working Environment Temperature | -10℃~40℃                                                   |             |
| Dimension                       | 317*311*34mm                                               |             |
| Net Weight≈                     | 633g                                                       | 570g        |

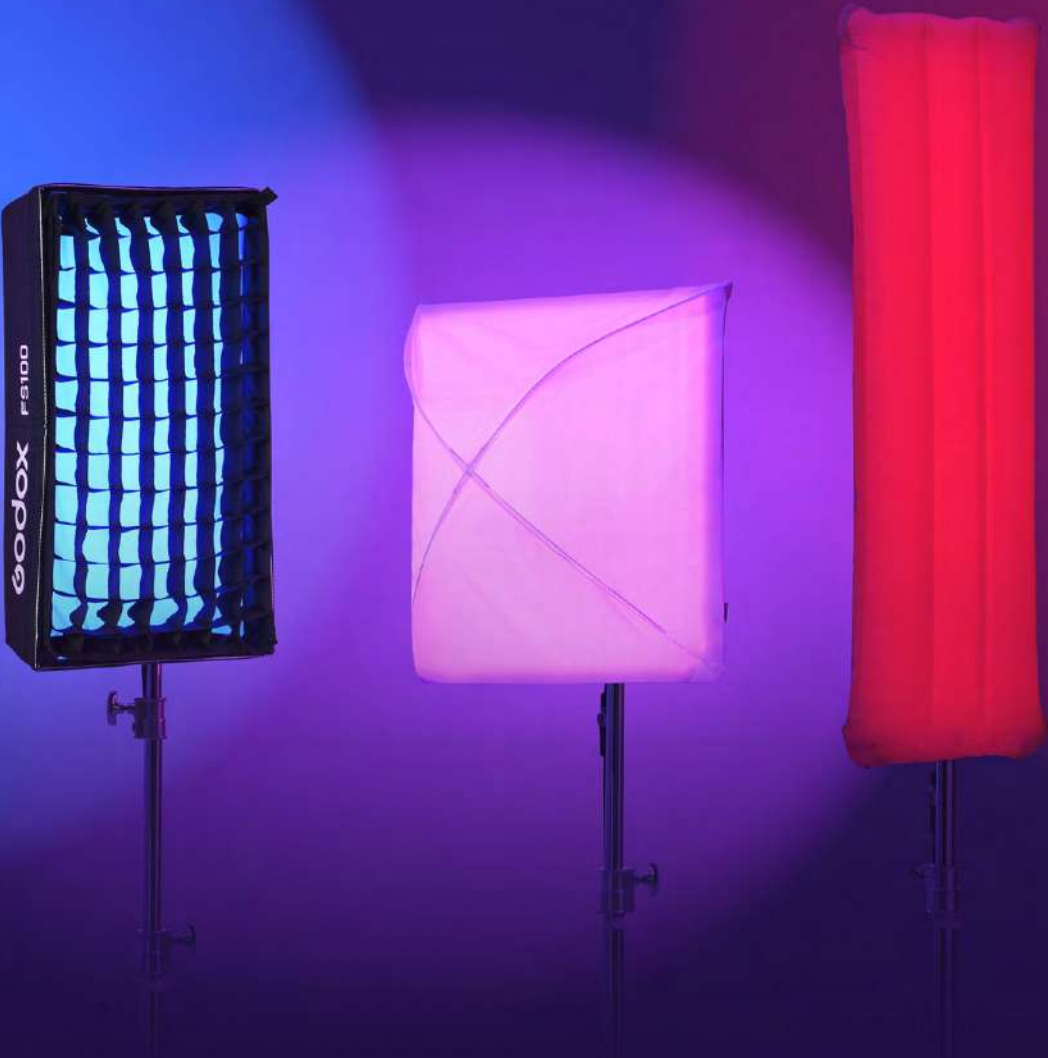

FL100R

FL200R

FL200SR

Key Features

- Ultra-thin and foldable light body
- Compact controller in one-hand Size
- Versatile full-color lighting
- Wide CCT range from 1,800K to 10,000K
- High color accuracy built to KNOWLED professional standard
- Powered by DC power supply and Single V-mount battery
- NFC pairing by Godox Light APP
- DMX control support
- Various sizes and accessories



Optional Purchase

Air Softbox Kit

- |                  |    |              |    |
|------------------|----|--------------|----|
| Air Softbox Body | ×1 | Air Pump     | ×1 |
| Grid             | ×1 | Repair Patch | ×2 |
| Skirt            | ×1 |              |    |



FA100 for FL100R



FA200 for FL200R



FA200S for FL 200SR

Pancake Lantern

FP200 for FL200R



DMX Adapter Cable

DMX-TRS1



Skirt for K1 Softbox

SS-FS100 for FS100  
SS-FS200 for FS200  
SS-FS200S for FS200S

Tech Specs

| Model                          | FL100R                                              | FL200R        | FL200SR       |
|--------------------------------|-----------------------------------------------------|---------------|---------------|
| AC INPUT Port                  | 100- 240V~50/60Hz 250W                              |               |               |
| CCT Range                      | 1800K-10000K                                        |               |               |
| GM Adjust                      | -100%-100%                                          |               |               |
| Brightness Range               | 0.0%-100.0%                                         |               |               |
| Dimming Curves                 | Linear, S-Curve, Exponential, Logarithmic           |               |               |
| CRI                            | ≈95                                                 |               |               |
| TLCI                           | ≈95                                                 |               |               |
| Controlling Methods            | Wired DMX and RDM/Bluetooth app/ Controller Control |               |               |
| Bluetooth Controlling Distance | 30m                                                 |               |               |
| USB-A Port                     | Firmware Upgrade/5V≈1A Power Supply                 |               |               |
| Working Environment            | -20°C~45°C                                          |               |               |
| Temperature                    |                                                     |               |               |
| Dimension of Controller        | ≈4.09"*2.95"*6.3"                                   |               |               |
| Net Weight of Controller       | ≈0.85kg                                             |               |               |
| Dimension of Bare Light        | 13.54"*25.04"                                       | 25.08"*25.08" | 13.54"*48.03" |
| Net Weight of Bare Light       | 0.6kg                                               | 1kg           | 1.05kg        |

AirTube Kit

- |              |    |                      |    |
|--------------|----|----------------------|----|
| Air Tube     | ×1 | Fabric Handle        | ×2 |
| Skirt        | ×1 | Connecting Holder    | ×1 |
| Air Pump     | ×1 | Velcro Hook Fastener | ×1 |
| Repair Patch | ×2 |                      |    |



AT200 for FL200SR

Foldable LED Mat

FL60/FL100/FL150S/FL150R



FL150R



FL150S      FL100      FL60



Use in combination



Color Temperature 3300K-5600K



Brightness (10%~100%)



Godox FL Series Flexible LED Lights are lightweight, portable, flexible and pliable as pieces of cloth to shape what you want.

Key Features

- Soft and even light effects & adjustable light brightness and color temperature.
- Compact and portable body with strong power. Suitable for lighting in small and narrow space.
- Can be folded to different shapes and used together to achieve creative light effects.
- Achieving wireless control by 433MHz grouping system (6 groups & 16 channels) with optional remote control and smartphone APP through Bluetooth.
- Powered by Lithium battery or DC power supply.
- With easy operation, great portability and compatibility.

Foldable LED Mat


FL60/FL100/FL150S/FL150R

Work with the accessories to achieve a softer lighting effect.



Easy to shape what you want

Providing a light source for all kinds of videorecording or photography in a narrow space !



Tech Specs

| Flexible LED Light         | FL150S/FL150R          | FL100S         | FL100R             |
|----------------------------|------------------------|----------------|--------------------|
| Power Supply               | AC100V-240V(50/60Hz)   |                |                    |
| DC Power Supply            | 3.5A(DC16.8V,10A)      | 3A(DC16.8V,7A) | 2.5A(DC16.8V,4.2A) |
| Lithium Battery            | V-port battery         |                |                    |
| Power                      | 150W                   | 100W           | 60W                |
| Color Temperature          | 3300±200K/5600±200K    |                |                    |
| 100% Light                 |                        |                |                    |
| Brightness (LUX)           | <4300 Lux              | <3300 Lux      | <1800 Lux          |
| (darkroom, 1m)             |                        |                |                    |
| TLCl                       | ≥98                    |                |                    |
| CRI                        | >96                    |                |                    |
| Light Brightness Range     | 10%-100%               |                |                    |
| OperationTemperature       | -10°C~45°C             |                |                    |
| Channel                    | 16                     |                |                    |
| Group                      | 6 group (A,B,C, D,E,F) |                |                    |
| Wireless Remote            | <30m                   |                |                    |
| Control Distance           |                        |                |                    |
| Bluetooth Distance         | <50m                   |                |                    |
| Dimension                  | 60*60cm/30*120cm       | 40*60cm        | 30*45cm            |
| Net Weight                 | 3.9kg/4.37kg           | 3.47kg         | 2.87kg             |
| (only the main light body) |                        |                |                    |





# HYBRID FLASH LED LIGHTS

Photographer: Aries Tao



Flash Mode



The Brightness of Flash is Four Times of LED's



Over 10 Continuous Flashes Per Second in 1/2 Power



1/8000s HSS



Godox Wireless X System

LED Mode



Soft Light Effects



0-100% Precise Brightness Adjustment



8 FX Special Effects

Key Features

- As a Flash**
- The flash's light brightness is four times of LED light's, which increase the freezing ability of instantaneous action.
  - Supports 1/8000s high-speed sync function. Over 10 continuous flashes per second and 8 continuous flashes per second in high-speed sync mode in 1/2 power output.
  - Built-in Godox 2.4G wireless receiver (X system), compatible with Canon, Nikon, Sony, Fuji, Panasonic, Olympus and Pentax cameras.
  - 1/16-1/1 or 6.0-10.0 power output displayed in the form of fractions or decimal.
  - Adjust modeling lamp's light brightness from 5% to 100%.
- As a LED Light**
- With soft light effects and high light brightness which can be precisely adjusted from 0% to 100%.
  - With 8 FX special effects mode to simulate various of shooting scene and achieve creative shooting.

More Design Details

- Support wireless control (16 groups and 32 channels) with optional remote control.
- With U-type bracket to adjust different angles easily.
- Bowens-mount enables to install various of accessories conveniently.
- Large and clear LCD display.
- Excellent heat dissipation.

Tech Specs

| High Speed Sync Flash LED Light     | FV150                | FV200        |
|-------------------------------------|----------------------|--------------|
| Power Supply                        | 100~240V(50/60Hz)    |              |
| Power                               | 150W                 | 200W         |
| Color Temperature                   | 5600±200K            |              |
| 100% Light Brightness(LUX, 1M)      | ≈12000               | ≈18000       |
| CRI(≈)                              | 96                   |              |
| TLCI(≈)                             | 96                   |              |
| Light Brightness Range of LED Mode  | 0%-100%              |              |
| Operation Temperature               | -10°~45°C            |              |
| Power Output                        | 1/16-1/1 or 6.0-10.0 |              |
| Channel                             | 32                   |              |
| Group                               | 16(A,B,C,D,E,F,0-9)  |              |
| Dimension                           | 34*20*16cm           | 36.7*20*16cm |
| (not included a standard reflector) |                      |              |
| Net Weight                          | 3.13Kg               | 3.33Kg       |



Flash Mode



The Brightness of Flash is 3 Times of LED's



1/8-1/1 or 7.0-10.0 Power Output



Godox Wireless X System

LED Mode



Soft Light Effects



0-100% Precise Brightness Adjustment



Li-ion & AC Power Supply

Featured with wireless group control and brightness adjustment with high lighting, LF308Bi fits various professional shooting occasions: wedding, journalistic and object video photography.

Key Features

- As a Flash**
- The light is 3 times brighter when used as flash than when used as a led light.
  - 1/8-1/1 or 7.0-10.0 power output displayed in the form of fractions or decimal.
  - The modeling lamp's light brightness can be adjusted from 0% to 100%.

As a LED Light

- 308 beads offers high brightness and stable light source.
- 0%-100% precise brightness adjustment.
- 3300K-5600K Color Temperature.

Tech Specs

| LED Flash Light        | LF308Bi Bicolor Version                                                   |
|------------------------|---------------------------------------------------------------------------|
| Lithium Battery        | 7.4V Lithium Battery(SONY NP-F970 model lithium battery)(sold separately) |
| DC Power Supply        | 6.5~12V 4A                                                                |
| Channel                | 32                                                                        |
| Group                  | 6 groups(A, B, C, D, E, F)                                                |
| Power                  | Max. 18W                                                                  |
| Color Temperature      | 3300K~5600K±300K                                                          |
| Brightness(LUX)        | LUX≤1200(1m)                                                              |
| Light Brightness Range | 10%~100%                                                                  |
| Power Output Control   | OF, 7.0-10(1/8-1/1)                                                       |
| Triggering Method      | Sync cord, test button, 2.4G wireless, Bluetooth                          |
| LED Beads Quantity     | 308(5600K:154/3300K:154)                                                  |
| Operation Temperature  | -10~50°C                                                                  |
| Dimension              | 180*185*40mm(not with the Handle)                                         |
| Net Weight             | 400g                                                                      |




# RGBWW TUBE LIGHTS

Photographer: LVN Studio

## RGBWW Tube Light

TL30

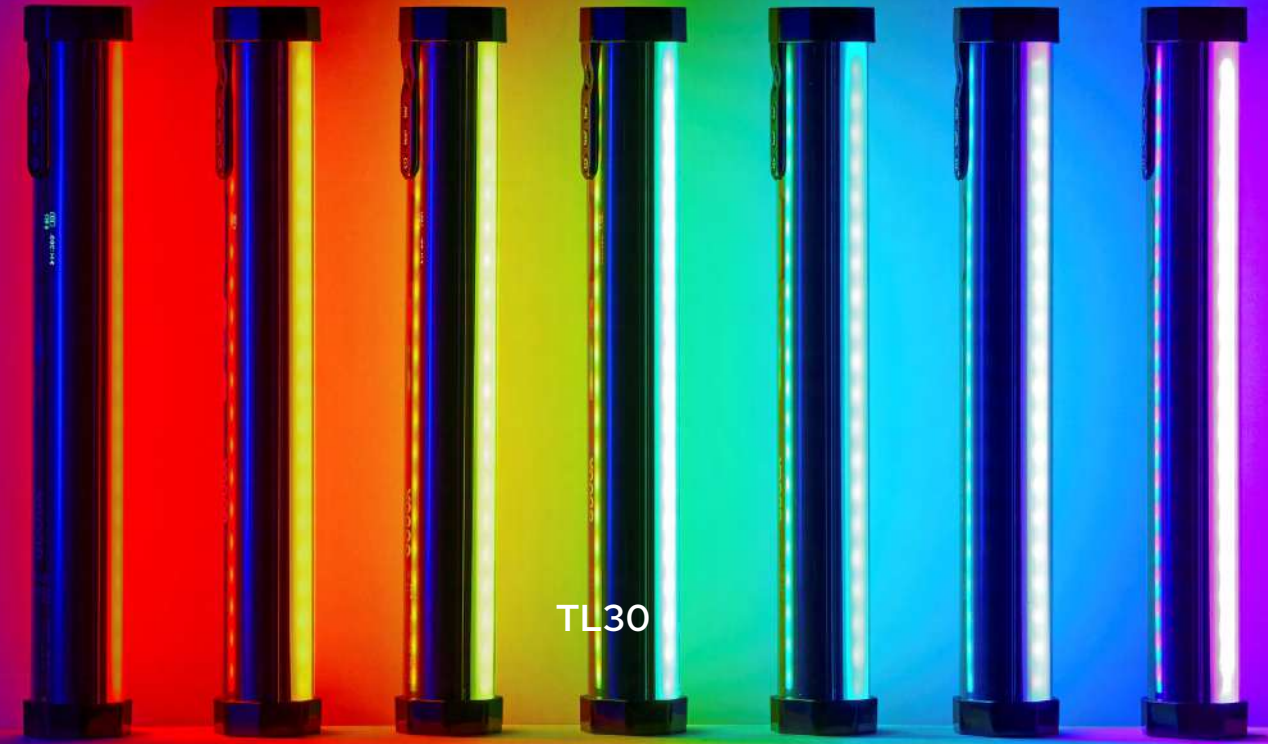

TL30

A new addition to Godox tube light family, TL30. Featuring tube shape in light weight, it is portable and easy to use. Small as it is, great potentials to expect. Tons of colors in control for dynamic content creating. Accessories like various couplers, waterproof bag, grid inspire extensive possibilities for the form, effect and even applicable environment of this light. You will enjoy the infinity that TL30 could be to enrich every shot.

### Key Features

- RGBWW, CCT, HSI modes
- 36,000 Colors
- 13 Tunable effects
- Advanced Green/Magenta adjustment
- Bluetooth control with Godox Light App
- USB-C charging port
- Integrated lithium-ion battery, 3.6V/2900mAh/10.7Wh
- Embedded magnetic mounts

### Abundant functions for various scenarios



TL-M8 8-light coupler

TL-M22 2-light coupler

TL-W30 Waterproof bag

TL-G30 Grid



**RGBWW**  
Adding Additional  
Two LED Whites



**HSI**  
Fully Control for up  
to 36000 Colors



**Gel**  
40 Built-in R-Gel  
and L-Gel Filters



**CCT**  
Wide Color Temperature  
From 2700K-6500K




**FX**  
39 FX  
Effects

Godox Tube light TL60 it's designed to give users the freedom to inspire their creativity for endless range of shooting scenarios, like film making, video and photography in anywhere you go. With multiple color modes, CRI 96 and TLCI 98, ultra smart control system, and flexible tube design, TL 60 enables variety lighting setups to represent impressive performance on highly explore creativity, carry out high efficiency shooting and produce memorable magic moments.

Key Features

- Color: 2700-6500K, CRI/TLCI: 96/98
- RGBWW/HSI Control, 40 Built-In Filters
- Battery Has 2-Hour Runtime
- Phone, DMX, 2.4 GHz Wireless Control
- Dims 0-100%, 98-164' Wireless Range
- 32 Channels, 6 Groups
- Power Adapter, DC Cable, Carry Bag

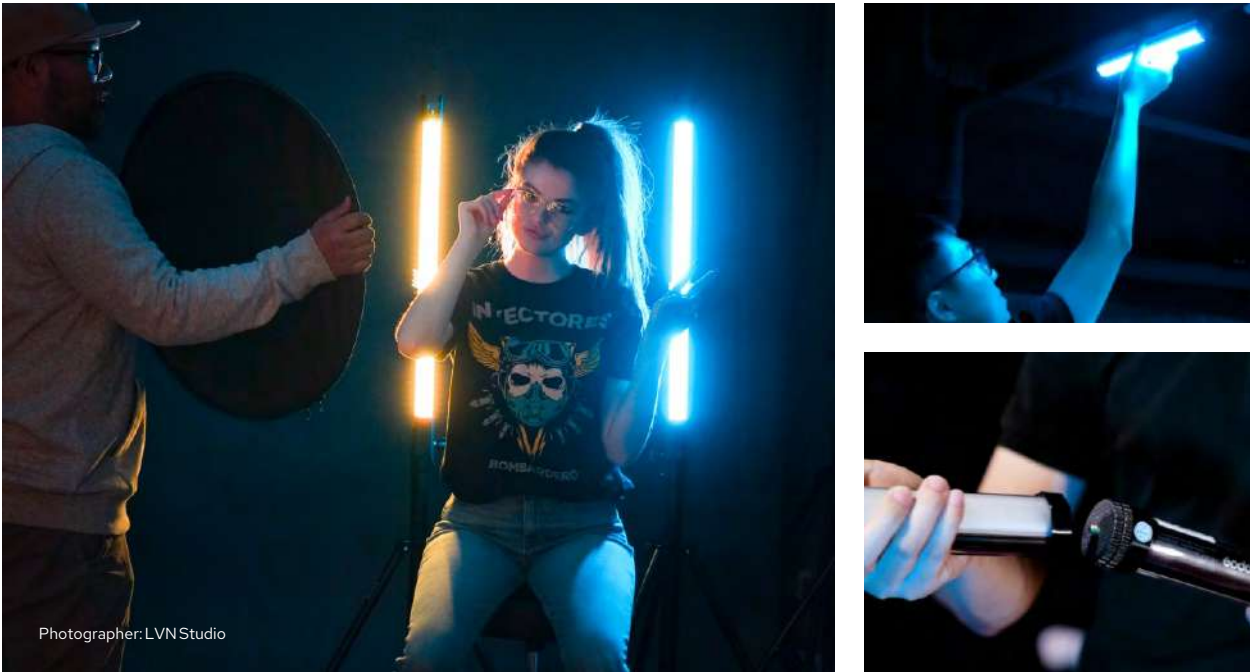

No matter you want to put it into different figures, hang on the wall, hold by hand or any other creative usage. It will satisfy with any kinds of shooting scenarios in anywhere. With Godox Light APP, you can freely control multi lights wirelessly.

Tech Specs

| LED Light                                                         | TL60                                                                           | TL30                     |
|-------------------------------------------------------------------|--------------------------------------------------------------------------------|--------------------------|
| Internal Lithium Battery                                          | 14.4V/2600mAh                                                                  | 3.6V/2900mAh/10.7Wh      |
| Adapter                                                           | Output 20V 2.4A                                                                | 5V/2A(optional)          |
| Power                                                             | Max.18W                                                                        | Max.8W                   |
| Color Temperature                                                 | 2700K~6500K                                                                    | 2700K~6500K              |
| Light Brightness Range                                            | 0%~100%                                                                        | 0%~100%                  |
| RGB Color Gamut                                                   | 0~360°                                                                         | 0~360°                   |
| 100% Brightness(LUX)≈                                             | 1500                                                                           | 740                      |
| CRI(≈)                                                            | 96                                                                             | 97                       |
| TLCI(≈)                                                           | 98                                                                             | 99                       |
| Duration(continuous output in 100% full power in 2700K for 6500K) | Approx 2 hours                                                                 | Approx. 60 minutes       |
| Control Method                                                    | Smartphone APP(for both Android and IOS system)/2.4G wireless/DMX control      | Smartphone APP /         |
| Control Distance                                                  | Bluetooth Wireless≈30m<br>2.4G Wireless≈50(with optional RC-R9 remote control) | Bluetooth Wireless≈30m / |
| Operating Temperature                                             | -10 to 40°C                                                                    | -10 to 40°C              |
| Dimension                                                         | φ48*750mm                                                                      | φ42*300mm                |
| Net Weight                                                        | 0.73kg                                                                         | 0.3kg                    |

TL30-K2 Two Light Kit for TL30

|                       |    |
|-----------------------|----|
| Tube Light TL30       | ×2 |
| Wrist Strap           | ×2 |
| Metal Plates          | ×6 |
| TL-G30 Grid           | ×2 |
| USB-C Power Cable     | ×2 |
| TL-C2 Retaining Clip  | ×2 |
| TL-M2 2-light Coupler | ×1 |
| Adhesive Hook & Loop  | ×6 |
| TL-W30 Waterproof Bag | ×2 |
| CB23 Carry Case       | ×1 |



TL30-K4 Four Light Kit for TL30

|                       |     |
|-----------------------|-----|
| Tube Light TL30       | ×4  |
| Wrist Strap           | ×4  |
| TL-G30 Grid           | ×2  |
| Metal Plates          | ×12 |
| USB-C Power Cable     | ×4  |
| TL-C2 Retaining Clip  | ×4  |
| TL-M2 2-light coupler | ×4  |
| TL-M8 8-light coupler | ×1  |
| TL-W30 Waterproof Bag | ×2  |
| Adhesive Hook & Loop  | ×12 |
| CB22 Carry Case       | ×1  |




TL60-K2 Four Light Kit for TL60

|                   |    |
|-------------------|----|
| Tube Light TL60   | ×2 |
| Retaining Clip    | ×2 |
| Power Adapter     | ×2 |
| Remote (RC-R9)    | ×1 |
| DC Power Cable    | ×2 |
| RJ45 Cable        | ×2 |
| Wirerope          | ×4 |
| Fixed base        | ×2 |
| Toggle clip       | ×2 |
| CB39 Carrying Bag | ×1 |



TL60-K4 Four Light Kit for TL60

|                   |    |
|-------------------|----|
| Tube Light TL60   | ×4 |
| Retaining Clip    | ×4 |
| Power Adapter     | ×4 |
| Remote (RC-R9)    | ×1 |
| DC Power Cable    | ×4 |
| RJ45 Cable        | ×4 |
| Wirerope          | ×8 |
| Fixed base        | ×4 |
| Toggle clip       | ×4 |
| CB40 Carrying Bag | ×1 |

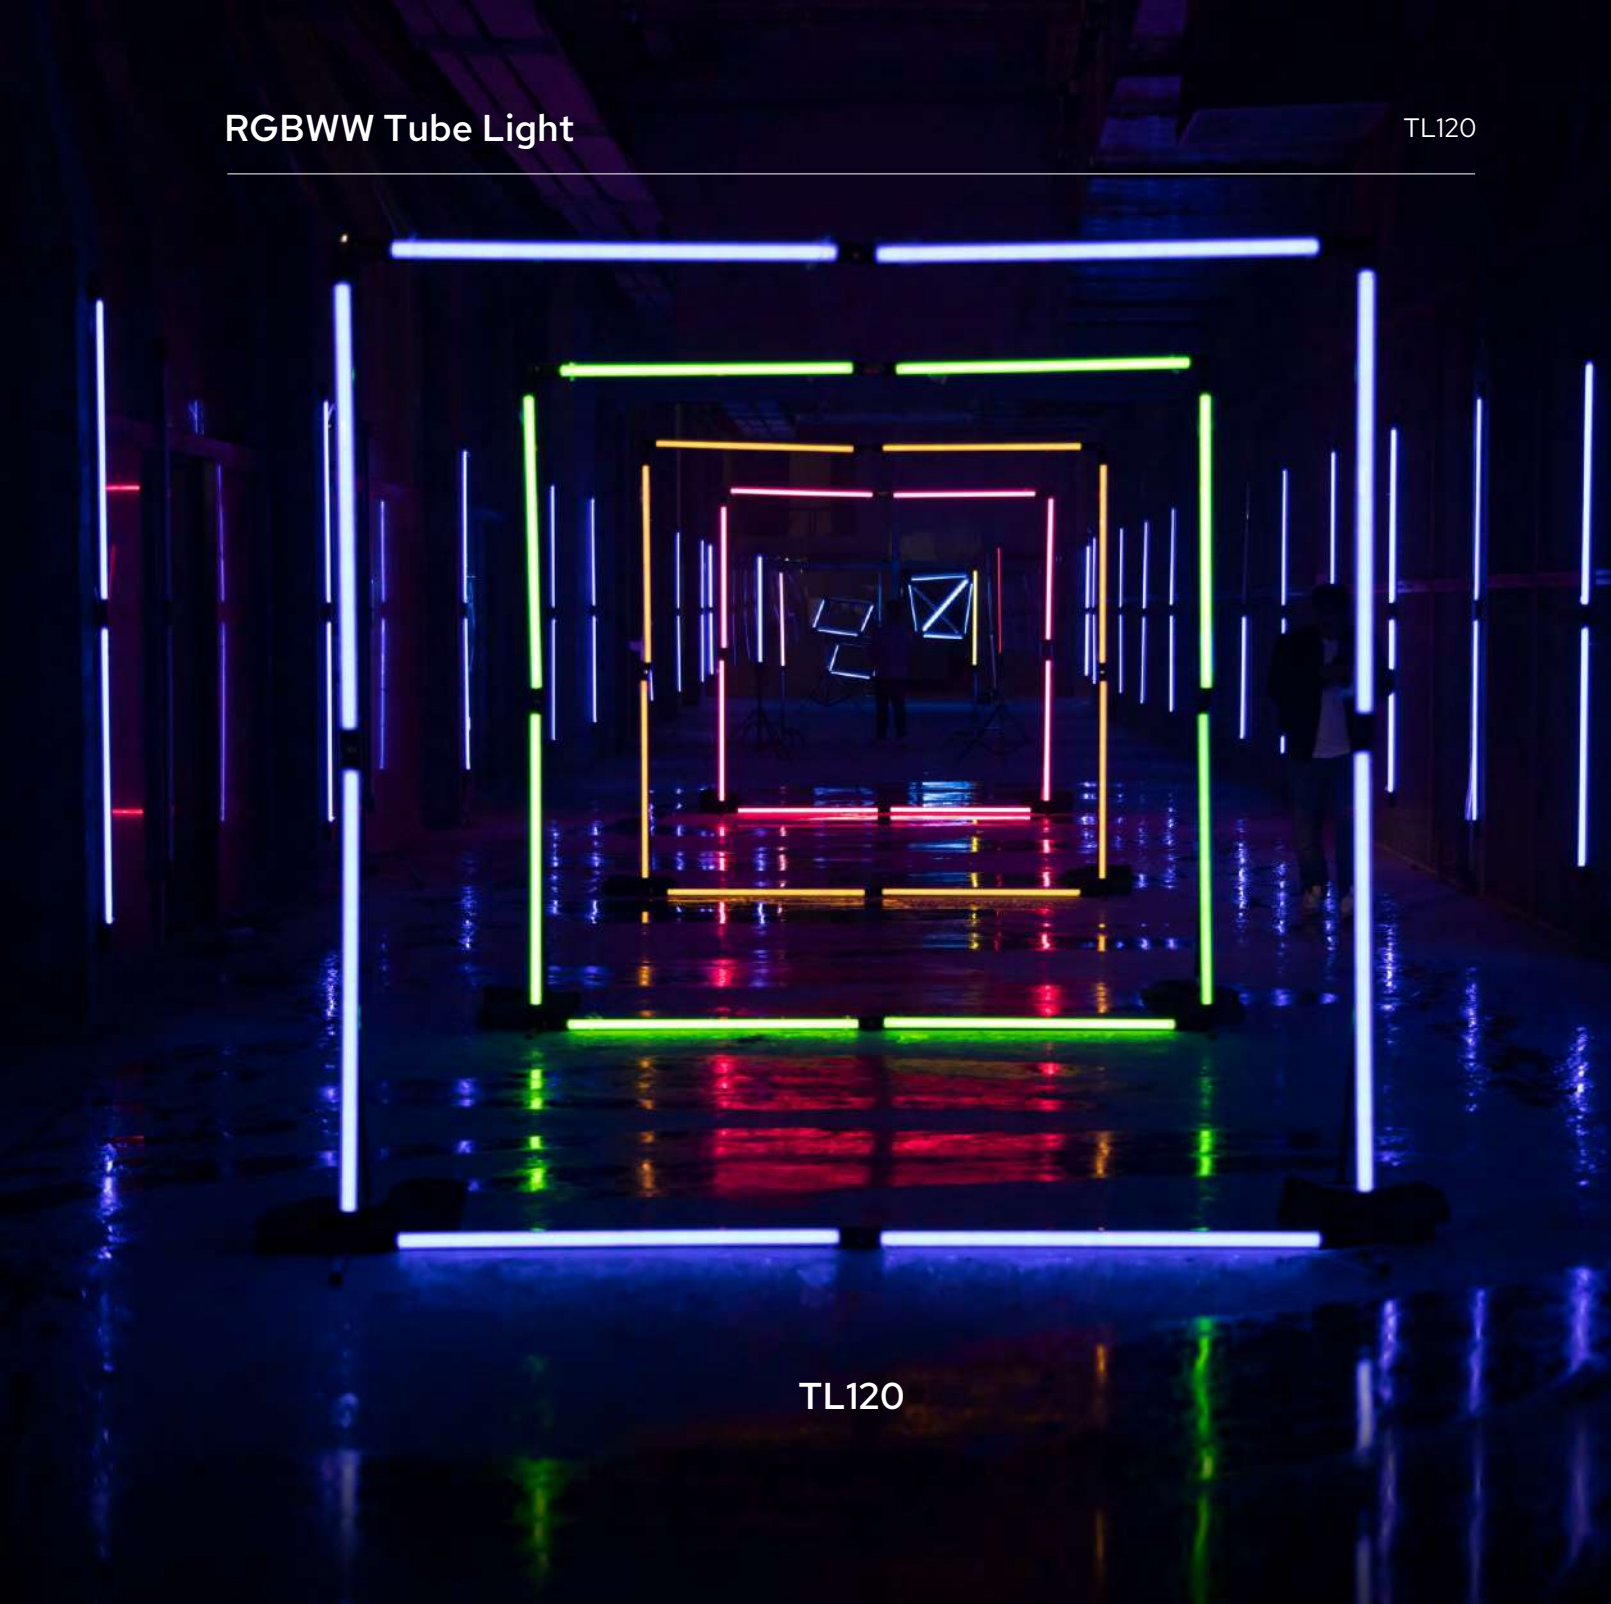

TL120



Multi-Light Bracket



Godox Light App Control



On-board Control

RGBWW Tube Light

TL120

Tech Specs

| LED Light                                                        | TL120                                     |
|------------------------------------------------------------------|-------------------------------------------|
| Built-in Lithium Battery                                         | 14.4V/5200mAh/74.88Wh                     |
| Adapter                                                          | 20V/4.8A                                  |
| Output Power                                                     | 30W                                       |
| Channel                                                          | 32                                        |
| Group                                                            | 6 (A B C D E F)                           |
| Color Temperature Range                                          | 2700K~6500K                               |
| Light Brightness Range                                           | 0%~100%                                   |
| RGB Color Gamut                                                  | 0 ~ 360°                                  |
| CRI (≈)                                                          | 96                                        |
| TLCI (≈)                                                         | 98                                        |
| Duration(continuous output in 100% full power in 2700K or 6500K) | 150 minutes                               |
| Control Method                                                   | Smartphone APP/2.4G wireless/DMX control  |
| Bluetooth Wireless Control Distance                              | ≈30m                                      |
| 2.4G Wireless Control Distance                                   | ≈50m (with optional RC-R9 remote control) |
| Operation Temperature                                            | -10~40 °C                                 |
| Dimension                                                        | 48*1170mm                                 |
| Net Weight                                                       | 1.27kg                                    |

| CCT   | Illumination Unit | 1m   | 2m   | 3m   |
|-------|-------------------|------|------|------|
| 2800K | lux               | 659  | 202  | 101  |
|       | fc                | 61.2 | 18.8 | 9.4  |
| 3200K | lux               | 610  | 187  | 93.3 |
|       | fc                | 56.7 | 17.4 | 8.7  |
| 4300K | lux               | 666  | 205  | 102  |
|       | fc                | 61.9 | 19   | 9.5  |
| 5600K | lux               | 685  | 210  | 104  |
|       | fc                | 63.7 | 19.5 | 9.7  |
| 6500K | lux               | 769  | 234  | 117  |
|       | fc                | 71.3 | 21.7 | 10.9 |



Optional Purchase



TL120-K4

|                      |    |  |
|----------------------|----|--|
| Light Body           | x4 |  |
| 5m Power Cord        | x4 |  |
| Adapter              | x4 |  |
| RJ45 Cable           | x4 |  |
| Clip                 | x8 |  |
| Steel Cable          | x8 |  |
| Adapter Holder       | x4 |  |
| Remote control RC-R9 | x1 |  |
| Carry Bag CB47       | x1 |  |
|                      |    |  |

RGBWW Tube Light

TL180



TL180



Optional Purchase



TL180-B2  
Two-light Bracket Kit



TL180-B4  
Four-light Bracket Kit



TL-G180  
Grid for TL180

Tech Specs

| LED Light                                        | TL180                                     |
|--------------------------------------------------|-------------------------------------------|
| Built-in Lithium Battery                         | 14.4V/9000mAh/129.6Wh                     |
| Adapter                                          | 20V/5.5A                                  |
| Power                                            | Max.55W                                   |
| Duration(continuous output in 100% full power )≈ | 160 minutes                               |
| Channel                                          | 32                                        |
| Group                                            | 6 (A B C D E F)                           |
| Color Temperature Range                          | 2700K~6500K                               |
| Light Brightness Range                           | 0%~100%                                   |
| RGB Color Gamut                                  | 0 ~ 360°                                  |
| CRI (≈)                                          | 96                                        |
| TLCl (≈)                                         | 98                                        |
| Control Method                                   | Smartphone APP/2.4G Wireless/ DMX Control |
| Bluetooth Wireless Control Distance              | ≈30m                                      |
| 2.4G Wireless Control Distance                   | ≈50m (with optional RC-R9 remote control) |
| Operation Temperature                            | -10~40 °C                                 |
| Dimension                                        | 51*1800mm                                 |
| Net Weight                                       | 2.21kg                                    |

Illuminance Data

| CCT   | Illumination Unit | 1m   | 2m   | 3m   |
|-------|-------------------|------|------|------|
| 2700K | lux               | 776  | 253  | 145  |
|       | fc                | 72.1 | 23.5 | 13.5 |
| 3200K | lux               | 672  | 234  | 125  |
|       | fc                | 92.7 | 21.8 | 11.6 |
| 4300K | lux               | 687  | 240  | 128  |
|       | fc                | 63.8 | 22.3 | 11.9 |
| 5600K | lux               | 729  | 254  | 136  |
|       | fc                | 67.8 | 23.6 | 12.6 |
| 6500K | lux               | 895  | 312  | 167  |
|       | fc                | 83.2 | 29   | 15.5 |



LIGHT STICKS





1580Lux(R)  
5600k@1m

CRI  
**95+**

CRI 95+

CRI  
**96+**

TLCI 96+



Compact Design



Replaceable  
Battery Handle



Barndoor



2500K-8500K



Multiple Color  
Modes



11FX/15FX  
Effects




Godox Light App

Featuring a replaceable battery handle, the LC500mini/LC500 Rmini excels in outdoor shooting endurance. Compact at 1.5 feet and about 1.2 pounds, it’s highly portable. The optical lens design enables 1580 lux at 20 watts. Discover a new level of portable brilliance with the LC500mini/LC500Rmini.

Key Features

- Battery Grip Convenience
- Compact at 1.5 feet and about 1.2 pounds
- 1580 Lux from 20W
- 2,500K-8,500K Color Temperature
- Shape Light with Barndoor
- 11 built-in FX effects
- APP Control

Optional Purchase

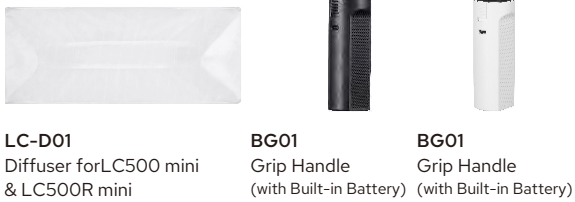

Tech Specs

| Model                             | LC500mini                            | LC500Rmini           |
|-----------------------------------|--------------------------------------|----------------------|
| Built-in Lithium Battery          | 7.2V=2470mAh                         |                      |
| Battery Life                      | Longest battery life                 | Longest battery life |
| (at 100% brightness, 5600K)       | ≈45min                               | ≈50min               |
| Type-C Input                      | 5V=2A 9V=2A 12V=2A                   |                      |
| Charging time                     | ≈1 hour 25 minutes(12V=2A)           |                      |
| Input Power                       | Max.≈20W                             |                      |
| CCT                               | 2500-8500K                           |                      |
| Brightness Range                  | 0%~100%                              |                      |
| FX Type                           | 11                                   | 15                   |
| CRI                               | Average≥95                           |                      |
| TLCI                              | Average≥96                           |                      |
| Control Method                    | Bluetooth Control/Light Body Control |                      |
| Bluetooth Control Distance        | Max. 30m                             |                      |
| Working Environment Temperature   | -10°C ~+40°C                         |                      |
| Dimension (Including Grip Handle) | 1.69"*1.73"*18"                      |                      |
| Net Weight≈                       | 548g                                 | 559g                 |



Key Features for LC500R



- Freely switch LED bicolor mode, colorful light mode and 39 situational special effects modes
- Easy to adjust color temperature, light brightness, hue and color saturation
- Wireless remote control (optional) offers great convenience
- With easy operation and wide application

Key Features for LC500

- With high color rendering index(CRI>95, TLCI≥95) and even illumination to present the objects authentically.
- Freely choose cold or warm color temperature. And the light brightness can be adjusted from 10% to 100%.
- Built-in lithium battery with long-lasting power supply.
- Optional remote control to wirelessly(6 groups & 16 channels) adjust the light for convenient shooting.
- Lightweight, portable and widely applicable.

Tech Specs

| LED Light                                      | LC500                                      | LC500R              |
|------------------------------------------------|--------------------------------------------|---------------------|
| Built-in Lithium Battery                       | 14.8V/2600mAh                              | 14.4V/2600mAh       |
| Power                                          | Max.18W                                    | Max.23W             |
| Color Temperature                              | 3300K±300K/6500K±300K                      | 2500K~8500K         |
| Channel                                        | 16                                         | 32                  |
| Group                                          | 6(A, B, C, D, E, F)                        | 6(A, B, C, D, E, F) |
| Light Brightness Range                         | 0%~100%                                    | 10%~100%            |
| RGB Color Gamut                                | N/A                                        | 0~360°              |
| 100% Brightness(LUX)≈                          | 1200(1m)                                   | Max. 5800           |
| CRI(≈)                                         | ≥95                                        | 96                  |
| TLCI(≈)                                        | >95                                        | 98                  |
| Duration(continuous output in 100% full power) | N/A                                        | Approx. 90 minutes  |
| Operating Temperature                          | -10 to 45°C                                | -10 to 45°C         |
| Dimension                                      | 565*56*56mm<br>(reflector is not included) | 616*56*56mm         |
| Net Weight                                     | 760g                                       | 0.81kg              |

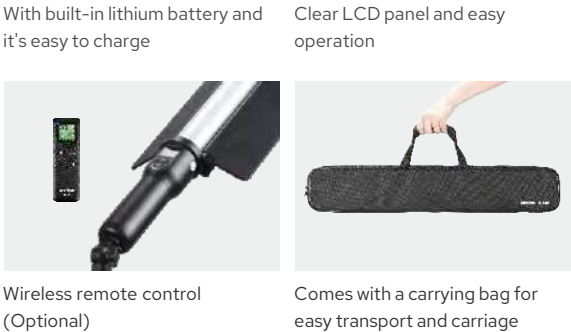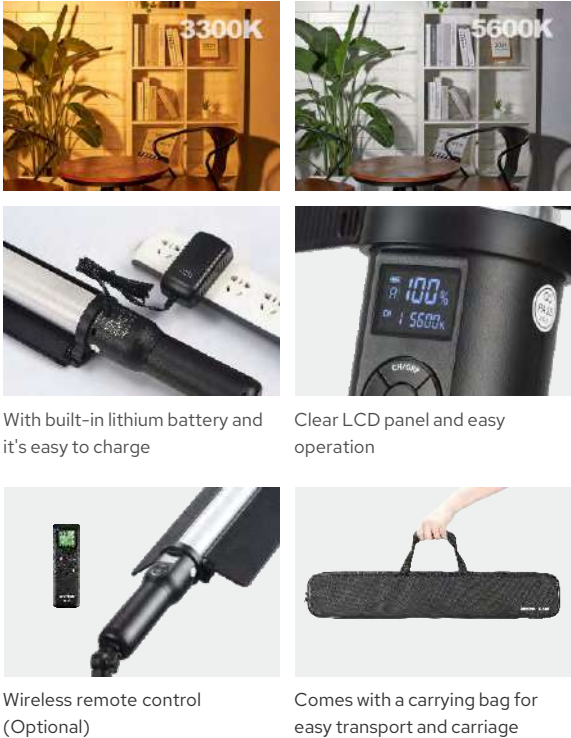



LC1000R

POWER  
100<sub>w</sub>

100W Output



Multiple  
Color Modes



Smooth  
Soft Lighting



Versatile  
Power Options



LC1000Bi

Introducing the LC1000Bi/LC1000R LED Light Stick—with powerful illumination, delivering impressive brightness at 100W in P mode. Ignite creativity with dynamic RGB colors and enjoy smooth, professional-quality lighting for various settings. Versatile power options ensure user-friendly operation in any environment, keeping you charged. Transform scenes with 11/15 built-in FX effects, perfectly synchronized with music. Elevate your video-shooting game today!

Key Features

- Powerful Lighting Output
- Dazzling Creations with Dynamic RGB Colors
- Smooth & Pro-Quality Illumination
- Designed for Effortless Handling
- Long Battery Life (Normal mode:Max.≈59min, P mode:Max.≈28min)
- Multiple Charging Options
- 11/15 built-in FX effects
- 2500K-8500K
- Easily Controlled via Device or App
- TLCI 96+ and CRI 96+



Optional Purchase



Grid

Tech Specs

| Model                                   | LC1000R                                   | LC1000Bi                                  |
|-----------------------------------------|-------------------------------------------|-------------------------------------------|
| Built-in Lithium Battery                | 21.6V/2600m Ah 56.16Wh                    |                                           |
| Battery Life(at 100% brightness, 5600K) | Normal mode:Max.≈59min, P mode:Max.≈28min | Normal mode:Max.≈49min, P mode:Max.≈27min |
| Type-C Input                            | 5V/9V/12V/15V/20V100W(Max.)               |                                           |
| DC Input                                | 20V = 6A                                  |                                           |
| Input Power                             | Normal Mode:Max.≈65W, P mode:Max.≈100W    |                                           |
| CCT                                     | 2500-8500K                                |                                           |
| Brightness Range                        | 0%~100%                                   |                                           |
| FX Type                                 | 15                                        | 11                                        |
| CRI                                     | Average≥96                                |                                           |
| TLCI                                    | Average≥96                                |                                           |
| Control Method                          | Bluetooth Control/Light Body Control      |                                           |
| Bluetooth Control                       | Max. 30m                                  |                                           |
| Distance                                |                                           |                                           |
| Working Environment                     | -10°C ~+40°C                              |                                           |
| Temperature                             |                                           |                                           |
| Dimension (Including Grip Handle)       | 2.2"*21.97"*1.89"                         |                                           |
| Net Weight≈                             | 1kg                                       |                                           |

Dive Lights

WT25D/WT40D/WT60D  
WT25R/WT40R/WT60R (RGBWW)



Dive Lights

WT25D/WT40D/WT60D  
WT25R/WT40R/WT60R (RGBWW)



WT25D WT25R      WT40D WT40R      WT60D WT60R

The diving lights bring a completely new way to light up underwater, even at 40m. Rarely found in traditional dive lights, they are tube-like in shape easily to be adjusted for different lighting angles for your desired effects. The unique shape makes it feasible to illuminate a wider area, discovering more wonders beneath the sea. The light it produces is remarkably smooth, adding a dreamlike atmosphere when applied to underwater portraits.

Key Features

- Offer exceptional water resistance and can perform at a professional level even when submerged up to 40m.
- Switch to high power automatically when submerged, offering more brightness.
- Equipped with a fluorescent button for easy on/off, mode changes, color adjustments, and other actions.
- The tube design creates a diffused and evenly distributed light.
- Standby time of up to 2 hours (WT60R/WT60D) at their maximum brightness in underwater mode.

Dive Lights



WT25D/WT40D/WT60D  
WT25R/WT40R/WT60R(RGBWW)



Optional Purchase



Light clamp WT-C01

Tech Specs

| Model                           | WT25D                                            | WT40D                                     | WT60D                       |
|---------------------------------|--------------------------------------------------|-------------------------------------------|-----------------------------|
| Power supply                    | 5V/2.5A, 9V/1.5A, 12V/1A,<br>15V/0.8A, 20V/0.75A | 5V/3A, 9V/3A, 12V/3A,<br>15V/2.7A, 20V/2A | 20V/3.25A                   |
| Power underwater                | Max. 24W                                         | Max. 54W                                  | Max. 70w                    |
| Power abovewater                | Max. 10w                                         | Max. 13w                                  | Max. 21W                    |
| Charging port                   | Type-C                                           | Type-C                                    | DC input port               |
| CCT                             | 5600K±300K                                       | 5600K±300K                                | 5600K±300K                  |
| TLCI                            | ≥96                                              | ≥96                                       | ≥96                         |
| CRI                             | ≥96                                              | ≥96                                       | ≥96                         |
| Brightness adjustment range     | 0%-100%                                          | 0%-100%                                   | 0%-100%                     |
| Waterproof rate                 | IP68 (40 meters underwater)                      | IP68 (40 meters underwater)               | IP68 (40 meters underwater) |
| Charging time                   | 2h at the soonest                                | 2h20min at the soonest                    | 2h40min at the soonest      |
| Battery life (100% brightness)  | ≈1h (underwater)                                 | ≈1h20min (underwater)                     | ≈2h (underwater)            |
|                                 | ≈2h20min (abovewater)                            | ≈5h30min (abovewater)                     | ≈6h (abovewater)            |
| Control Method                  | Bluetooth APP control                            | Bluetooth APP control                     | Bluetooth APP control       |
| Bluetooth control distance      | ≈25m (only abovewater)                           | ≈25m (only abovewater)                    | ≈25m (only abovewater)      |
| Working environment temperature | -10℃~40℃                                         | -10℃~40℃                                  | -10℃~40℃                    |
| Dimension                       | 57*52*250mm                                      | 57*52*380mm                               | 57*52*640mm                 |
| Net weight                      | 0.64kg                                           | 1.08kg                                    | 1.9kg                       |

Dive Lights

WT25D/WT40D/WT60D  
WT25R/WT40R/WT60R(RGBWW)



Tech Specs

| Model                           | WT25R                                            | WT40R                                     | WT60R                       |
|---------------------------------|--------------------------------------------------|-------------------------------------------|-----------------------------|
| Power supply                    | 5V/2.5A, 9V/1.5A, 12V/1A,<br>15V/0.8A, 20V/0.75A | 5V/3A, 9V/3A, 12V/3A,<br>15V/2.7A, 20V/2A | 20V/3.25A                   |
| Power underwater                | Max. 20W                                         | Max. 55W                                  | Max. 77w                    |
| Power abovewater                | Max. 7w                                          | Max. 15w                                  | Max. 14W                    |
| Charging port                   | Type-C                                           | Type-C                                    | DC input port               |
| CCT                             | 1800K-10000K                                     | 1800K-10000K                              | 1800K-10000K                |
| TLCI                            | ≥96                                              | ≥96                                       | ≥96                         |
| CRI                             | ≥96                                              | ≥96                                       | ≥96                         |
| Brightness adjustment range     | 0%-100%                                          | 0%-100%                                   | 0%-100%                     |
| Mode                            | CCT Mode/HSI Mode/                               | CCT Mode/HSI Mode/                        | CCT Mode/HSI Mode/          |
|                                 | RGBW Mode/GEL Mode/FX Mode                       | RGBW Mode/GEL Mode/FX Mode                | RGBW Mode/GEL Mode/FX Mode  |
| Waterproof rate                 | IP68 (40 meters underwater)                      | IP68 (40 meters underwater)               | IP68 (40 meters underwater) |
| Charging time                   | 2h 10min at the soonest                          | 2h 20min at the soonest                   | 2h at the soonest           |
| Battery life (100% brightness)  | ≈1h (underwater)                                 | ≈1.5h (underwater)                        | ≈2h (underwater)            |
|                                 | ≈3h (abovewater)                                 | ≈5.8h (abovewater)                        | ≈10h (abovewater)           |
| Control Method                  | Bluetooth APP control                            | Bluetooth APP control                     | Bluetooth APP control       |
| Bluetooth control distance      | ≈25m (only abovewater)                           | ≈25m (only abovewater)                    | ≈25m (only abovewater)      |
| Working environment temperature | -10℃~40℃                                         | -10℃~40℃                                  | -10℃~40℃                    |
| Dimension                       | 57*53*250mm                                      | 57*53*380mm                               | 57*53*640mm                 |
| Net weight                      | 0.66kg                                           | 1.1kg                                     | 1.9kg                       |



# STREAMING LIGHTS



ES30

Key Features

- Ultra-soft lighting with edge-lit technology
- Gentle on the eyes
- Brightness stepless adjustment from 0-100%
- Color temperature adjustable from 2800k-6500k
- No fan, no fan noises, good for streaming
- Godox Light APP control available
- Slim body suitable for narrow space
- Selectable between desktop stand and desk-mount clamp

Tech Specs

| Model               | ES30                                 |
|---------------------|--------------------------------------|
| Adapter Input       | 100-240V~50/60Hz 1.0A                |
| Adapter Output      | 14V=2.5A                             |
| Power               | Max.35W                              |
| CCT                 | 2800-6500K                           |
| CRI                 | 96+                                  |
| TLCI                | 97+                                  |
| Brightness Range    | 0~100%                               |
| Control Method      | Light body control/Bluetooth control |
| Working Temperature | -10℃-40℃                             |
| Dimension           | 233*233*42mm                         |
| Net weight≈         | 0.74kg                               |

ES30 Kit 1

- Light Body ×1
- Adapter ×1
- Power Cable ×1
- Telescopic Desk Mount Stand ×1



ES30 Kit 2

- Light Body ×1
- Adapter ×1
- Power Cable ×1
- Telescopic Desktop Stand ×1



Illuminance Data

| CCT   | Illuminance unit | 0.5m | 1m   | 2m   |
|-------|------------------|------|------|------|
| 2800K | lux              | 1190 | 315  | 87.1 |
|       | fc               | 111  | 29.3 | 8    |
| 3200K | lux              | 1510 | 399  | 110  |
|       | fc               | 140  | 37.1 | 10.2 |
| 4300K | lux              | 2280 | 602  | 167  |
|       | fc               | 212  | 56   | 15.5 |
| 5600K | lux              | 1550 | 408  | 113  |
|       | fc               | 144  | 37.9 | 10.5 |
| 6500K | lux              | 1330 | 350  | 96.9 |
|       | fc               | 123  | 32.5 | 9    |

All the above tests are based on the condition of 100% brightness

E-sports LED Light

ES45



Designed especially for E-sports streamers, ES45 Kit is built to last with solid metal while keeping incredible slim and space-saving. It is bright enough to illuminate your streaming space yet still comfortably soft to your eyes. Embrace the ES45 Kit and just WOW. You look much more professional than before.

Key Features

- Magnetic Auto-Charging Remote Controller
- Adjust color and brightness with the wireless 2.4 GHz controller. It's detachable from the light and reattaches magnetically to charge.
- IOS/Android Smartphone Control: Godox Light app
- The ES45 renders soft light that is especially flattering to skin tones and complexions, so you'll always look your best.



Photographer: VJUS AS

Tech Specs


| Model                            | ES45 Kit                           |
|----------------------------------|------------------------------------|
| DC Power Supply by Adapter       | Input: 100~240V 50/60Hz 1.3A       |
|                                  | Output: 14.8V 3.42A                |
| Lithium Battery of Operate Panel | 3.7V Lithium battery (built-in)    |
| Power                            | Up to approx.47.6W in max.         |
|                                  | (color temperature: 4100K)         |
| Channel                          | 32 (1~32)                          |
| Group                            | 3(A, B, C)                         |
| Color Temperature                | 2800 ~ 6500K                       |
| 100% Lumen (lm)                  | Max.2500                           |
| 100% Luminosity (lx)             | Max.≈4100                          |
| (darkroom, 0.5m distance)        |                                    |
| CRI                              | ≥96                                |
| TLCI                             | ≥97                                |
| Brightness Range                 | 0~100%                             |
| Control Method                   | Smartphone APP/ 2.4G Wireless      |
| Quantity of LED Beads            | 176                                |
|                                  | (operate panel is not included)    |
|                                  | 367 * 230* 45.9mm                  |
| Working Environment Temperature  | -10~40°C                           |
|                                  | (operate panel is included)        |
| Dimension                        | 367 * 230* 31.04mm                 |
| Weight                           | 1.33KG (operate panel is included) |
|                                  |                                    |

LED Ring Light

LR120/LR150



LED Ring Light LR120/LR150 is suitable for wide occasions e.g. livestream, video, make up, product shooting, etc.

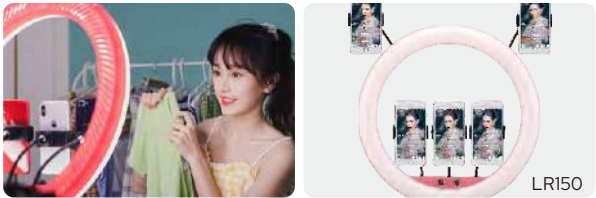

Key Features

- Freely adjust color temperature and brightness
- Soft light effects and catchlight
- Easy operation
- Flexible application



Tech Specs

| LED Ring Light            | LR120               | LR150                      |
|---------------------------|---------------------|----------------------------|
| DC Power Supply           | 5V/2A               | 24V/2A                     |
| USB Power Output          | /                   | 5V/2A                      |
| Power                     | Approx. 10W         | Approx. 38W                |
| Color Temperature         | 3000K-6000K         | 3000K-6000K                |
| 100% Brightness(LUX)0.5m≈ | 550                 | 1400                       |
| Light Brightness Range    | 0%~100%             | 1%~100%                    |
| CRI                       | >90                 | >90                        |
| TLCI                      | >90                 | >90                        |
| LED Beads Quantity        | 222                 | 336                        |
| Operation Temperature     | -10~40°C            | -10~40°C                   |
| Dimension                 | 305*395*35mm        | 455*555*45mm               |
|                           |                     |                            |
| Weight                    | Black version: 440g | Black version: 880g        |
|                           |                     | Warning Pink version: 870g |




With cold or warm temperature and light brightness adjustment, LED Ring Light LR160 & LR180 is suitable for live, portrait shooting and make up. There are pink version and black version for choice.

Key Features

- Premium LED beads with soft light effects.
- Adjustable light brightness and color temperature.
- DC power supply or lithium batteries (separately sold). Note: LR160 supports DC & lithium batteries power supply while Lr180 only supports DC power supply.
- Included a smartphone holder to offer convenience.



Adjust LR160's color temperature by rotating the knob.



Adjust LR180's color temperature by replacing different light-passing board.



Light brightness adjustment

Tech Specs

| LED Ring Light           | Lr160                        | LR180                                                                                                                                                         |
|--------------------------|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Lithium Battery          | 2*7.4V Lithium battery       | /                                                                                                                                                             |
|                          | (NP-F970)(separately sold) / |                                                                                                                                                               |
| DC Power Supply          | 16V/1.5A                     | 16.8V/2A                                                                                                                                                      |
| Power                    | Approx.18W                   | Approx. 27W                                                                                                                                                   |
| Color                    | 3300K-8000K                  | Black version: 3300K or 5600K                                                                                                                                 |
| Temperature              |                              | Pink version: 3100K or 5000K                                                                                                                                  |
| 100%Brightness (LUX)(1M) | Below 400 (1 meter)          | Black version White light-passing board 600<br>Yellow light-passing board 400<br>Pink version White light-passing board 600<br>Yellow light-passing board 500 |
| CRI(max. brightness)     | ≈92                          | ≈92                                                                                                                                                           |
| TLCI(max. brightness)    | ≈97                          | ≈97                                                                                                                                                           |
| Light Brightness         | 10% ~ 100%                   | Light brightness can be adjusted.                                                                                                                             |
| Range                    |                              |                                                                                                                                                               |
| LED Beads                | 160                          | 180                                                                                                                                                           |
| Quantity                 |                              |                                                                                                                                                               |
| Operation                | -10°C ~ 40°C                 | -10°C ~ 40°C                                                                                                                                                  |
| Temperature              |                              |                                                                                                                                                               |
| Dimension                | 49.2* 59*4cm                 | 36.1*46*4cm                                                                                                                                                   |
| Weight                   | 1.21kg                       | 0.88kg (with one light-passing board)                                                                                                                         |



Waterproof Lights

WL4B

97  
CRI

97  
TLCI

IPX8  
100ft Waterproof

Magnet  
Absorption

1/4"  
Thread Hole

Godox Light  
App Control

WL4B

Waterproof Lights

WL8P

97  
CRI

97  
TLCI

IP68  
33ft Waterproof

0%-100%  
Dimmable

1/4"  
Thread Hole

Godox Light  
App Control

2700K-8500K

WL8P

Key Features

- A CRI/TLCI rating of 97 and the 55° beam angle make it a powerful light fixture with excellent color rendition
- Wireless control via Godox Light APP support easy brightness adjustments, FX settings and the other necessary controls
- The fixture supports 13 effects including Lighting, Flash, Broken Bulb, TV, and SOS
- The WL4B is waterproof down to 100ft, which allows you to comfortably use the fixture in wet weather as well as dry, or when submerged
- It incorporates a rechargeable battery that lasts 80 minutes at full brightness, conveniently charging via USB-C cable connecting with your power bank or other power supplies outdoors.



Tech Specs

| Model                            | WL4B                                                                                                        |
|----------------------------------|-------------------------------------------------------------------------------------------------------------|
| Built-in Lithium Battery         | 3.8V/1500mA                                                                                                 |
| Power                            | Max.4W                                                                                                      |
| Waterproof Level                 | IPX8(30m)                                                                                                   |
| Color Temperature Range          | 5600K±300K                                                                                                  |
| Max. Illumination (LUX)(0.5m)(*) | 1900                                                                                                        |
| CRI(≈)                           | 97                                                                                                          |
| TLCI(≈)                          | 97                                                                                                          |
| Brightness Range                 | Low/Medium/High/SOS                                                                                         |
| Beam Angle                       | 55°                                                                                                         |
| Continuous Usage Time            | High brightness≈1 hour and 20 minutes<br>Medium brightness≈2 hours<br>Low brightness≈5 hours and 30 minutes |
| Standard Charging Power Source   | DC5V/2A                                                                                                     |
| Control Method                   | Smartphone APP                                                                                              |
| Working Environment Tempertature | -10~40°C                                                                                                    |
| Dimension                        | 45*45*47mm                                                                                                  |
| Weight                           | 116g                                                                                                        |



As a pocket-sized Led with rugged metal housing, WL8P is perfect for on-the-go shooting even in tough conditions. Featuring trustful brightness, high color fidelity and adjustable color temperature, the light combines high performance with portability, ready to cope with any wet weather shooting or realize your underwater creativity.

Tech Specs

| Model                                   | WL8P                                                                                        |
|-----------------------------------------|---------------------------------------------------------------------------------------------|
| Built-in Lithium Battery                | 3.7V/2900mAh/10.73Wh                                                                        |
| Standard Charging Power Source          | DC 5V/ 2A                                                                                   |
| Power                                   | 10W                                                                                         |
| Waterproof and Dustproof Grade          | IP68(10m)                                                                                   |
| Color Temperature Range                 | 2700K~8500K                                                                                 |
| CRI(≈)                                  | 96                                                                                          |
| TLCI(≈)                                 | 97                                                                                          |
| Brightness Range                        | 0%-100%                                                                                     |
| Photometrics                            | 313 fc/3370 Lux at 0.98'/0.3m<br>116 fc/1250 Lux at 1.64'/0.5m<br>30 fc/323 Lux at 3.28'/1m |
| Bluetooth Transmission Distance on Land | 10m                                                                                         |
| Continuous Working Time                 | 100% brightness≥1h                                                                          |
| Control Method                          | Mobile phone APP                                                                            |
| Working Environment Temperature         | -10°C -40°C                                                                                 |
| Dimension                               | 11*5.7*3.25cm                                                                               |
| Net Weight                              | 263g                                                                                        |

Key Features

- Small and lightweight, easy to carry.
- IP68 rating, resistant to water up to 10m, perfect for waterside vlogging.
- 160 LED beads, dimmable from 0% to 100%, with a wide beam angle.
- Color Accuracy: CRI 96+, TLCI 97+, delivering natural, vibrant light.
- Adjustable Color Temperature: CCT mode (2700K-8500K) for flexible lighting options.
- Creative Light Effects: 8 built-in effects with 3 modes each for dramatic video effects.
- Wireless Control: Remote brightness, color, and FX control via Godox Light App.
- Long Battery Life: 2900mAh lithium battery, 1-hour runtime at full brightness.

# SMARTPHONE LIGHTINGS

Magnetic Charging Full-Color LED Light

MA5R

MA5R



Color Options



Key Features

- Pocket light & wireless power bank in one
- Integrated selfie light
- Wide CCT range: 1800K-10000K
- 220+min Runtime
- Full color versatility for creative lighting effects
- Compact design with a side thickness of just 13mm
- Available in 6 Colors to suit various styles and preferences
- NFC & Bluetooth Connectivity for seamless control via the app



Dual-Sided Magnetic Tripod

AM01

AM01



The AM01 is powered by N52-grade magnets, offering a strong, secure hold for your MA5R or smartphone. Its dual-sided magnets keep your MA5R steady on one side while holding other items firmly on the other. Easily transform it into a magnetic tripod, or mount it to your camera using the cold shoe adapter. Plus, the bonus magnetic ring ensures a reliable connection for sturdy performance.

Key Features

- N52 Magnets
- Dual-Sided Attraction
- A Tripod or Mount on Camera
- Bouns Magnetic Ring
- Foldable and Portable



R1





Free Color Adjustment



Blink with Music



39 Special Effects

Key Features

- This light can change multiple colors to achieve creative light effects. With approx. 98 CRI and 97 TLCI, it can present projects authentically.
- There're 39 different patterns in RGB scene mode, e.g. music, lightning, screen, RGB quick recycle, RGB slow recycle, candlelight, police car, fire truck, ambulance, etc.
- Built-in Lithium Battery and Charge with Type-C USB Port, Freely adjust light brightness from 0% to 100%. It supports continuous work for 1.5 hour in full power.
- Compatible with Various of Accessories and Achieve More Light Effects With magnetic accessory port, this light supports to install AK-R1 round head accessories (separately sold) and achieve creative shooting.
- With built-in magnet, this light can be quickly pasted onto the back of smartphone, which saves a lot of time and energy.

Tech Specs

| Model                                     | R1                              |
|-------------------------------------------|---------------------------------|
| Built-in Lithium Battery                  | 1800mA                          |
| Power                                     | Max. 5W                         |
| Charging power supply                     | 5V1A, 5V2A                      |
| Color temperature range                   | 2500K~8500K                     |
| 100% Illuminance(LUX)(0.5m)(≈)            | 605                             |
| CRI(≈)                                    | 98                              |
| TLCI(≈)                                   | 97                              |
| Light brightness range                    | 0%~100%                         |
| Duration(continuous output in 100% power) | Approx. 90 Minutes              |
| Operation temperature                     | -10~45°C                        |
| Dimension                                 | Diameter: 75mm; Thickness: 23mm |
| Net weight                                | 150g                            |

M1





Free Color Adjustment



Blink with Music



40 Special Effects

Key Features

- Freely switch CCT mode, RGB mode and 40 FX special effects modes.
- Easy to adjust color temperature, light brightness, hue and color saturation
- With a dedicated screen to display parameters precisely
- With a universal accumulating bracket to quickly adjust different lighting angles
- With simple operation and light and thin body which offers great portability
- Various of using methods



Tech Specs

| Model                                     | M1                                 |
|-------------------------------------------|------------------------------------|
| Charger(separately sold)                  | 5V2A/18W QC3.0(5V3A,9V2A,12V1.5A)  |
| Power                                     | Max. 13W                           |
| Color temperature range                   | 2500K~8500K                        |
| Light brightness range                    | 0%~100%                            |
| RGB Color gamut                           | 0~360°                             |
| 100% Illuminance(LUX)                     | Max. 1700                          |
| CRI(≈)                                    | 97                                 |
| TLCI(≈)                                   | 97                                 |
| Bracket rotation angle                    | Main axis: 360°; Inside axis: 270° |
| Duration(continuous output in 100% power) | 150 Minutes                        |
| Operation temperature                     | -10~45°C                           |
| Dimension                                 | 145*70*15mm                        |
| Net weight                                | 240g                               |



With the light weight and convenient operation, LEDM32 & LEDM150 Mini Light is excellent for all kinds of mobile phones.

Key Features

- High-quality LED bulbs
- Built-in lithium battery
- Soft and even illumination
- Adjustable light brightness
- With the optical control flash fire function
- With a lightweight and portable body
- Fit almost any mobile phones

Tech Specs

| LED Light                | LEDM32     | LEDM150                                                           |
|--------------------------|------------|-------------------------------------------------------------------|
| Built-in Lithium Battery | 3.7V/300mA | 3.7V/3000mAh                                                      |
| Power                    | Max. 1.4W  | Max. 9W                                                           |
| Color Temperature        | 5200K±300K | 5600K±300K                                                        |
| Brightness (LUX)         | >120(0.5m) | 1029(0.5m)                                                        |
| Color Rendering Index    | ≥95        | >95                                                               |
| TLCI                     | ≥94        | ≥94                                                               |
| Light Brightness Range   | 10%~100%   | 10%~100%                                                          |
| LED Beads Quantity       | 32         | 150                                                               |
| Operation Temperature    | -10~50°C   | -10~50°C                                                          |
| Dimension                | 50*50*28mm | 132*80*20mm<br>(not with the L-type Bracket and Mounting Bracket) |
| Net Weight               | 30g        | 170g                                                              |

# UTEMONS



Key Features

- Integrated Power Supply--No External Adapter Required
- LE200Bi: 57700lux (@5600K, 1m); LE300Bi: 58900lux (@5600K, 1m)
- TLCI≈98, CRI≈98
- Flat Bowens Mount Compatibility
- Wired DMX/CRMX/APP Control
- Brand New Bluetooth Reset Button and NFC Addition
- Robust Metal Body and Ultra-Quiet Fan
- An ideal Solution for Livestreaming, Podcasting, Video Production and Photography

LE200Bi/300Bi/600Bi ●○



Light Body    ×1    Reflector BR30A    ×1    AC Power Cord    ×1

Tech Specs

| Model                 | LE200Bi                                                             | LE300Bi      | LE600Bi        |
|-----------------------|---------------------------------------------------------------------|--------------|----------------|
| AC INPUT Port         | 100V-240V ~ 50/60Hz                                                 |              |                |
|                       | 220W                                                                | 315W         | 610W           |
| CCT Range             | 2800K ~ 6500K                                                       |              |                |
| Brightness Range      | 0% ~ 100%                                                           |              |                |
| FX Modes              | 11                                                                  |              |                |
| CRI                   | ≈98                                                                 |              | ≈97            |
| TLCI                  | ≈98                                                                 |              | ≈99            |
| Controlling Methods   | Wired DMX/RDM, Bluetooth, Light Body Control                        |              |                |
| Bluetooth Controlling | 30m                                                                 |              |                |
| Distance              |                                                                     |              |                |
| USB-A Port            | Firmware upgrade/5V = 1.5A power supply                             |              |                |
| Working Environment   | -20°C~45°C                                                          |              |                |
| Temperature           |                                                                     |              |                |
| Dimension             | ≈6.22"*9.41"*10.31"    ≈6.22"*9.41"*10.31"    ≈10.71"*11.10"*15.63" |              |                |
| (without reflector)   |                                                                     |              |                |
| Net Weight            | ≈2.9kg/6.4lb                                                        | ≈2.9kg/6.4lb | ≈4.77kg/10.6lb |
| (without reflector)   |                                                                     |              |                |




Key Features

- Full/Bi-color LED COB light
- 600W high power delivers 212,500 Lux@1m with LA600Bi
- Wide CCT range: 1,800-10,000K(R)/2,800-6,500K(Bi)
- Cinema-grade Color Accuracy
- Flat bowens mount compatibility for diverse needs
- DMX & App control support
- NFC tap-to-pair multi-light technology
- Built-in 14 FX effects
- 48V XLR power supply for stable high-output performance

Tech Specs

| Model                           | LA600R                                                                    | LA600R      |
|---------------------------------|---------------------------------------------------------------------------|-------------|
| Power Supply                    | 100V-240V~50/60Hz                                                         |             |
| DC Port Input Power             | 48V-600W(Max.)                                                            |             |
| CCT Range                       | 1800K-10000K                                                              | 2800K-6500K |
| GM Adjustment                   | -100%-100%                                                                | \           |
| Brightness Range                | 0%-100%                                                                   |             |
| FX Modes                        | 14 Types                                                                  | 11 Types    |
| CRI                             | Average≥95                                                                |             |
| TLCI                            | Average≥95                                                                |             |
| Controlling Methods             | Wired DMX Control, support RDM protocol/ Bluetooth app/light body control |             |
| Bluetooth Controlling Distance  | 60m                                                                       |             |
| USB-A Port                      | Firmware Upgrade/5V    1.5A Power Supply                                  |             |
| Working Environment Temperature | -20°C~45°C                                                                |             |
| Dimension (without reflector)≈  | 10.83"*11.5"*14.76"                                                       |             |
| Net Weight (without reflector)≈ | 5.1kg                                                                     | 4.5kg       |

LA600R/Bi(White Version) ●○

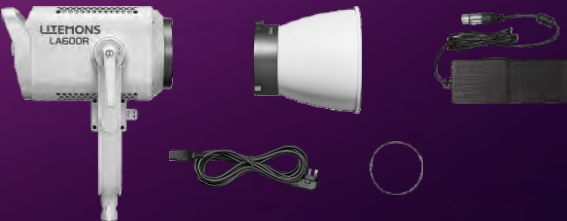

Light Body    ×1    Steel Rope    ×1  
Adapter    ×1    Reflector BR30    ×1  
AC Power Cord    ×1

\* Tips: The black version is available for purchase, with identical specifications.

LA600R/Bi K1(White Version) ●○



Light Body    ×1    Steel Rope    ×1  
Adapter    ×1    Reflector BR30    ×1  
AC Power Cord    ×1    Storage Bag    ×1

\* Tips: The black version is available for purchase, with identical specifications.

Litemons LED Light

LA150R/LA200R/LA300R/LA300Bi



To meet the demand for versatile RGB lighting in today's dynamic photography and videography landscape, LITEMONS LA150R, LA200R, LA300R, and LA300Bi stand out with a wide CCT range from 1800K to 10000K, delivering exceptional light quality for any creative scenario. Whether for indoor studios or outdoor shoots, they provide the flexibility and performance creators need.

Key Features

- 94,700lux @1m with LA300R
- Wide CCT Range: 1800-10000K (R)/2800-6500K (Bi)
- Professional LED Design Standards by High-end KNOWLED
- NFC Integration for Seamless Workflow with Godox Light App
- DC & V-mount Battery Power Supply
- 3-Light Kit Option
- Wide Compatibility with Bowens Mount



Tech Specs

| Model                         | LA150R             | LA200R | LA300R | LA300Bi     |
|-------------------------------|--------------------|--------|--------|-------------|
| Input Power                   | 165W               | 220W   | 330W   | 330W        |
| Power Supply                  | 100V-240V~50/60Hz  |        |        |             |
| CCT                           | 1800K-10000K       |        |        | 2800K-6500K |
| GM Adjustment                 | -100%~100%         |        |        | /           |
| Brightness Range              | 0%-100%            |        |        |             |
| CRI                           | Average≥95         |        |        |             |
| TLCI                          | Average≥94         |        |        |             |
| Bluetooth Control Distance    | Max.30m            |        |        |             |
| Working Environment           | -20°C-40°C         |        |        |             |
| Temperature                   |                    |        |        |             |
| Dimension (without reflector) | ≈9.09"*6.14"*9.37" |        |        |             |
| Netweight (without reflector) | ≈2.5kg             |        |        |             |



Litemons LED Light

LA150R/LA200R/LA300R/LA300Bi



Optional Kit

|                |    |               |    |                |    |                   |    |
|----------------|----|---------------|----|----------------|----|-------------------|----|
|                |    |               |    |                |    |                   |    |
| <b>K1</b> ○ ●  |    |               |    | <b>K2</b> ○ ●  |    |                   |    |
| Light Body     | x1 | AC Power Cord | x1 | Light Body     | x2 | Wire Rope         | x2 |
| Reflector Br30 | x1 | Wire Rope     | x1 | Reflector Br30 | x2 | Softbox SB-BW6090 | x2 |
| Adapter        | x1 | Storage Bag   | x1 | Adapter        | x2 | Light Stands      | x2 |
|                |    |               |    | AC Power Cord  | x2 | Storage Bag       | x1 |
|                |    |               |    |                |    |                   |    |
| <b>K3</b> ○ ●  |    |               |    | <b>3K</b> ○ ●  |    |                   |    |
| Light Body     | x3 | Wire Rope     | x3 | Light Body     | x3 | AC Power Cord     | x3 |
| Reflector Br30 | x3 | Light Stands  | x3 | Reflector Br30 | x3 | Wire Rope         | x3 |
| Adapter        | x3 | Storage Bag   | x1 | Adapter        | x3 | Storage Bag       | x1 |
| AC Power Cord  | x3 |               |    |                |    |                   |    |



Godox has launched many successful products and wins the support and admiration of our customers. But the further we go, the more responsibility we feel like taking on to contribute to the development of the industry. Aiming at providing an accessible light solution to whoever wants to start creation, we are excited to introduce the budget-friendly Litemons LA150D/150Bi/200D/200Bi. With different output and daylight/bi-color versions to choose from, the LA series can meet various needs for YouTubers, live streamers, video makers, commercial producers and more.

Key Features

- Compact but powerful, with 101000 lux output at 1meter (LA200D with reflector)
- Stepless brightness adjustment from 0 to 100%
- Bi-colored LA150Bi/LA200Bi is adjustable from 2800-6500K
- High CRI/TLCI rating of 96+/97+ ensures natural and faithful colors
- Godox Light APP available
- LA150D/LA200D features 8 FX light effects, including Flash 1, Flash 2, Flash 3, Storm 1, Storm 2, Storm 3; LA150Bi/LA200Bi adds another three light effects: Candle, Fire and Firework.
- Compatible with any Bowens mount light shapers
- Built-in umbrella mount



Bowens Mount Softbox




- |                                                                                      |                                                                                                         |                                                                                         |                                                                                         |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| <b>Square Softbox</b><br>With Grid: SB-FW-6060/9090<br>Without Grid: SB-BW-6060/9090 | <b>Rectangular Softbox</b><br>With Grid: SB-FW-6090/70100/80120<br>Without Grid: SB-BW-6090/70100/80120 | <b>Strip Softbox</b><br>With Grid: SB-FW-50130/35160<br>Without Grid: SB-BW-50130/35160 | <b>Octagon Softbox</b><br>With Grid: SB-FW-95/120/140<br>Without Grid: SB-BW-95/120/140 |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|

Quick Release Umbrella Softbox



- UL-BOX-30\*45/45\*60/60\*90/90\*120  
UL-BOX-40/60/90  
UL-BOX Octa-60/90/150  
UL-BOX-30\*90

Collapsible Lantern Softbox

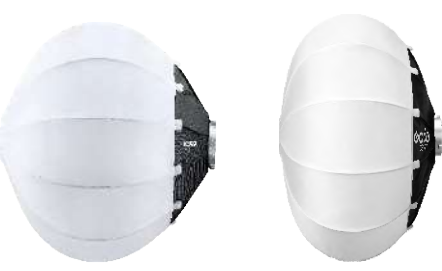

- CS-50D/65D/85D  
CS-50T/65T/85T

Parabolic Softbox



- P90L/90H/120L/120H

Quick Release Parabolic Softbox




- QR-P70/P90/P120

Quick Release Parabolic Softbox



- QR-P60T/P70T/P90T/P120T/P150T

Parabolic Focusing System



- P68/88/128/158 Kit

Fresnel



- FLS8/FLS10

Projection Attachment

BLP



BLP Projection Attachment  
\*For LA150D/LA200D/LA150Bi/LA200Bi

BP-SE



BP-SE Projection Attachment  
\*For LA300R/LA200R/LA150R/LA300Bi

Accessories for BLP&BP-SE



Lens 48mm



Lens 65mm



Lens 85mm



Lens 150mm



SA-11C  
Color Effects Set



SA-11T  
CCT Adjustment Set



MLP-CF  
Gobo Holder



MLP-ID  
Iris Diaphragm



BLP-CTF  
Gel Frame



BLP-CTF 48mm  
Gel Frame



SA-GD  
Godox-mount Adapter

BP



BP19K/26K/36K  
\*For LA600Bi/600R/300R/  
200R/150R/300Bi

Accessories for BP



19° Optical Projection Lens  
(Lens 19°)



26° Optical Projection Lens  
(Lens 26°)



36° Optical Projection Lens  
(Lens 36°)

Accessories for Projection Attachment



Gobo Set VSA-GS1



Gobo Set VSA-GS2



Gobo Set VSA-GS3



Gobo Set VSA-GS4



SA-11C  
Color Effects Set



SA-11T  
CCT Adjustment Set



VSA-ID  
Iris Diaphragm



LP800Bi

Key Features

- Expansive Soft-yet-bright Panel
- 2800K-6500K CCT Range & 11 FX Effects
- CRI≈96/TLCI≈98 High Color Fidelity
- 180° Adjustable Angle
- Includes A Light Stand for Fast Setups
- On-board Adjustment and Godox Light App Control
- Fanless Cooling Design Keeps Noise-free



Light Body ×1 LED Video Baby Stand 1.9M (BS-3R-FE-190) ×1



Tech Specs

| Model                           | LP800Bi                       |
|---------------------------------|-------------------------------|
| Input                           | 100V-240V~50/60Hz, 85W        |
| CCT Range                       | 2800K~6500K                   |
| DIM Range                       | 0%~100%                       |
| FX Modes                        | 11                            |
| CRI                             | ≈96                           |
| TLCI                            | ≈98                           |
| Controlling Methods             | Bluetooth, light body control |
| Bluetooth Controlling Distance  | 30m                           |
| Working Environment Temperature | -10°C ~ 40°C                  |
| Dimension                       | ≈13.5"*2.6"*24.49"            |
| Net Weight                      | ≈2.3kg                        |

Litemons LED Light Panel

LP400R/LP600R/LP1200R  
LP400Bi/LP600Bi/LP1200Bi



Key Features

- Bright & Soft Lighting Results
- Wide CCT Range: 1800-10000K (R)/2800-6500K (Bi)
- Professional Modes: CCT/RGB/HSI/GEL/FX
- Battery Power Option
- Custom-molded Carry Case for Easy Transport
- Stylish Aesthetics in a Compact Design
- 2/3-Light Kit Options
- Flexible for Every Scene
- Seamless Workflow with Godox Light App

Tech Specs

| Model                           | LP400Bi                | LP600Bi        | LP1200Bi       |
|---------------------------------|------------------------|----------------|----------------|
| Input Power                     | 36W                    | 60W            | 120W           |
| Power Supply                    | 20V=1.8A               | 20V=3A         | 20V=6A         |
| CCT                             | 2800-6500K             |                |                |
| GM Adjustment                   | 0%-100%                |                |                |
| CRI                             | Average≥96             |                |                |
| TLCI                            | Average≥96             |                |                |
| FX Modes                        | 11                     |                |                |
| Controlling Methods             | Bluetooth App/On-board |                |                |
| Bluetooth Control Distance      | ≥15m                   |                |                |
| Working Environment Temperature | -10℃-35℃               |                |                |
| Dimension                       | 229*201*69.5mm         | 264*201*69.5mm | 401*422*69.5mm |
| Netweight                       | 855g                   | 985g           | 1847g          |

| Model                           | LP400R                 | LP600R         | LP1200R        |
|---------------------------------|------------------------|----------------|----------------|
| Input Power                     | 36W                    | 60W            | 120W           |
| Power Supply                    | 20V=1.8A               | 20V=3A         | 20V=6A         |
| CCT                             | 1800-10000K            |                |                |
| GM Adjustment                   | 0%-100%                |                |                |
| CRI                             | Average≥96             |                |                |
| TLCI                            | Average≥96             |                |                |
| FX Modes                        | 14                     |                |                |
| Controlling Methods             | Bluetooth App/On-board |                |                |
| Bluetooth Control Distance      | ≥15m                   |                |                |
| Working Environment Temperature | -10℃-35℃               |                |                |
| Dimension                       | 229*201*69.5mm         | 264*201*69.5mm | 401*422*69.5mm |
| Netweight                       | 855g                   | 985g           | 1847g          |



Litemons LED Light Panel

LP400R/LP600R/LP1200R  
LP400Bi/LP600Bi/LP1200Bi



Optional Kit



2-light Kit

|                       |    |             |    |
|-----------------------|----|-------------|----|
| Light Body(with Yoke) | ×2 | Barndoors   | ×2 |
| Adapter               | ×2 | Light Stand | ×2 |
| Power Cord            | ×2 | Carry Case  | ×1 |



3-light Kit

|                       |    |             |    |
|-----------------------|----|-------------|----|
| Light Body(with Yoke) | ×3 | Barndoors   | ×3 |
| Adapter               | ×3 | Light Stand | ×3 |
| Power Cord            | ×3 | Carry Case  | ×1 |



C30Bi/C30R



2200Lux  
@1m(5600K)

248g

Lightweight  
Design



45-Minute  
Runtime



USB  
Rechargeable

The C30Bi/R is a compact, pocket-sized panel light with 2200lux brightness at 1 meter and a 5600K color temperature. Weighing only 248g, it's lightweight and portable. Featuring advanced LED beads and Godox's optical lens technology, it ensures excellent light quality. The built-in rechargeable battery offers 45 minutes of full-power runtime and supports charging while in use, making it perfect for on-the-go lighting.

Key Features

- Weighs just 248g, fits in any pocket for ultimate portability
- 30W power with advanced LED beads and optical lens
- 45 minutes of full-power use with charging via Type-C
- CCT: 2800K-6500K (C30Bi)/1800K-10000K (C30R)
- Efficient heat dissipation and low-noise fan
- Compatible with handheld, camera-mounted, or stand-mounted setups via 1/4" threaded hole

Tech Specs

| Model                           | C30Bi                                                            |
|---------------------------------|------------------------------------------------------------------|
| Lithium Battery                 | DC7.4V 3350mAh 24.8Wh                                            |
| USB-C Port Input                | 5V=3A, 9V=3A, 12V=3A                                             |
| Brightness Range                | 0%-100%                                                          |
| CCT Range                       | 2800K-6500K                                                      |
| Charging Time                   | ≈2h                                                              |
| Working Time                    | ≈45min(100% brightness output)<br>≈276min(50% brightness output) |
| CRI                             | Average≥94                                                       |
| TLCI                            | Average≥96                                                       |
| Working Environment Temperature | -10°C~40°C                                                       |
| Bare Light Dimension            | ≈5.24" *3.07" *1.02"                                             |
| Bare Light Net Weight           | ≈248g                                                            |



LR15Bi/LR30Bi



Key Features

- Side-emitting Optics Tech
- Ultra-soft Light
- Pocket-sized
- Magnetic Modular Design
- 75+min Battery Life
- CRI≈97 and TLCI≈98
- Included Snap-on Mirror
- Simple-button Adjustment



LR15Bi


|              |    |                  |    |
|--------------|----|------------------|----|
| 2.Light Body | ×1 | 4.Magnetic Ring  | ×1 |
| 5.Phone Clip | ×1 | 6.Charging Cable | ×1 |

LR30Bi

|              |    |                  |    |
|--------------|----|------------------|----|
| 1.Light Body | ×1 | 6.Charging Cable | ×1 |
| 3.Mirror     | ×1 |                  |    |

LR Kit

|                     |    |                     |    |
|---------------------|----|---------------------|----|
| 2.LR15Bi Light Body | ×1 | 1.LR30Bi Light Body | ×1 |
| 5.Phone Clip        | ×1 | 3.Mirror            | ×1 |
| 4.Magnetic Ring     | ×1 | 6.Charging Cable    | ×2 |

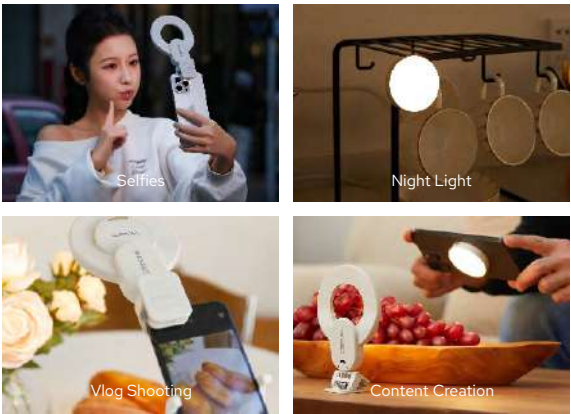

Tech Specs

| Model                           | LR15Bi                            | LR30Bi            |
|---------------------------------|-----------------------------------|-------------------|
| Charging Time≈                  | 2h                                |                   |
| Battery Life≈                   | 1h 15min (100% DIM)               |                   |
| USB-C Port                      | Input: 5V≈2A                      |                   |
| Brightness Levels               | 20%, 40%, 60%, 80%, 100%          |                   |
| CCT Values                      | 2800K, 3200K, 4500K, 5600K, 6500K |                   |
| CRI                             | ≈97                               |                   |
| TLCI                            | ≈98                               |                   |
| Working Environment Temperature | -10°C~35°C                        |                   |
| Bare Light Dimension≈           | 2.2"*2.2"*0.43"                   | 3.98"*1.46"*6.26" |
| Bare Light Net Weight≈          | 33g                               | 83g               |



LED6R Bi  
LED6R



36000 Colors



Light Effects



Magnet  
Absorption



Use in  
Combination



Type-C  
Port

Litemons video light series is a set of entry-level tools designed to make your journey of the content creation much easier, a portable, ease-of-use and budget-friendly lighting solution to which our LED6R/LED6Bi belongs. Small but versatile, the two lights are made for different needs. For creators who'd love to play with colors and try dramatic effects, the RGBWW LED6R won't let you down. Otherwise, try LED6Bi if you only need a simple bi-color solution. Working with camera or smartphone, the Litemons series is always your best choice for vlogging, YouTube video, party lighting, selfie, portrait, product photography and more.

Key Features

- Pocket-sized and ultra-lightweight
- RGB/CCT & 3200 to 6500K Color Temperature
- 0 to 100% Brightness Dimming
- Built-In Display Panel
- Integrated 1800mAh Lithium Battery
- Magnetic Mounting
- Cold Shoe Mounting Foot & 3 x Cold Shoes
- Vertically & Horizontally Stackable

Tech Specs


| Model                           | LED6DR      | LED6DBi                   |
|---------------------------------|-------------|---------------------------|
| Built-in Lithium Battery        | 1800mAh     | 1800mAh                   |
| Power Source of Charging        | 5V/2A       | 5V/2A                     |
| Power                           | Max. 6W     | Max. 6W                   |
| Color Temperature Range         | 3200K~6500K | 3200K~6500K (in 9 levels) |
| 100% Illuminance(LUX)(0.5m)(s)  | 270         | 360                       |
| CRI(≈)                          | 95          | 95                        |
| Brightness Range                | 0%~100%     | in 10 levels              |
| Duration                        | 2H-10H      | 1.5H-10H                  |
| Working Environment Temperature | -10~40°C    | -10~40°C                  |
| Dimension                       | 77*66*30mm  | 77*66*30mm                |
| Net Weight                      | 110g        | 110g                      |

\* RGB mode, FX mode, magnetic design (only for LED 6R)

# GODOX CONTROL



## APP Control

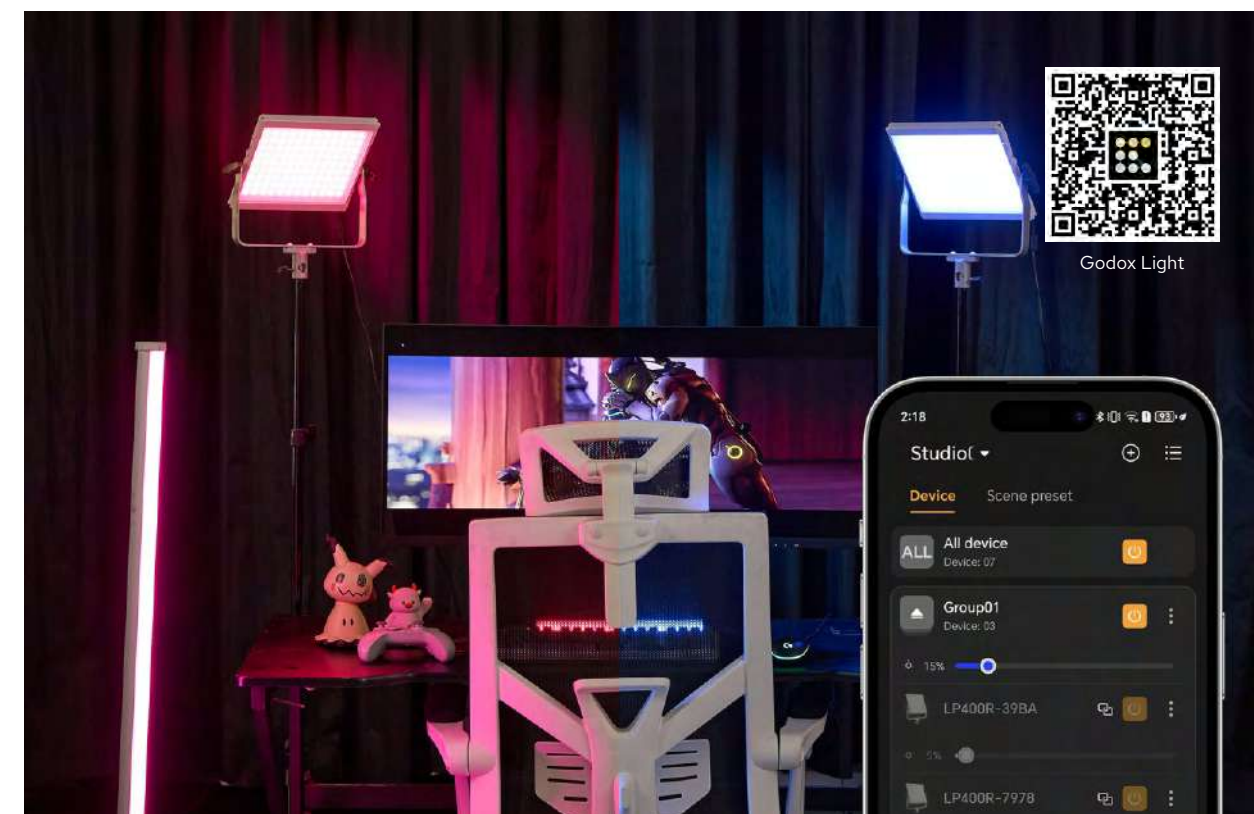

### Flexible Setting. Easier Shooting

Experience flexible settings and easier shooting with the all-new Godox Light App 4.0. Revolutionize your workflow with instant NFC pairing, a fluid interface, and intuitive dual-mode control. Packed with professional color tools and a collaborative ecosystem, it is the ultimate companion for every lighting creator.

### Key Features

- User-friendly UI designed for efficiency.
- Features NFC and Bluetooth addition.
- Dual Modes: List & Studio.
- Infinite Colors and Effects including CCT, HSI, RGB, X/Y, and GELs.
- In-App Video Guides.
- Simpler Sharing & Remote Control.

## Remote Control



RC-R9II



RC-A6II



RC-A5II



TimoLink RX

TimoLink TX

Built with CRMX modules from Lumenradio, TimoLink TX and TimoLink RX are wireless DMX transmitters and receivers compatible with Godox or other fixtures featuring DMX control capabilities.

The transmitter TimoLink TX converts a wired DMX console to wireless by sending signals to CRMX-compatible fixtures or receivers. As for the receiver TimoLink RX, it works perfectly with DMX-compatible fixtures that do not include wireless modules (such as LA600R/Bi) and enables them to achieve wireless DMX control. TimoLink TX and TimoLink RX are ideal for filmmaking, broadcasting and other scenes where wireless DMX is needed.

Key Features

- Automatic frequency hopping ensures stable signals within 300m.
- 270° rotatable connectors for wider compatibility with different interface designs.
- Separately designed SET button and RESET button simplify operation logic and enhance efficiency.
- The TEST feature for TimoLink TX can help check the connection status of lights even off the DMX board.



Optional Purchase



TL-C120  
RJ45 to 5-Pin XLR Conversion Cable

RJ45 Ethernet to 5 Pin XLR Conversion Cable allows you to run standard 5 Pin DMX cable to the Godox lights or any light fixture with RJ45 DMX input connectors.

Tech Specs

| Name                            | Wireless DMX Transmitter                                                            | Wireless DMX Receiver                               |
|---------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------|
| Model                           | TimoLink TX                                                                         | TimoLink RX                                         |
| Input Parameter                 | 5V≈280mA                                                                            | 5V≈90mA                                             |
| Colors of Signal Indicator      | 8                                                                                   | 8                                                   |
| Power Supply Port               | Type-C                                                                              | Type-C                                              |
| Compatible Models               | DMX512 Controller/DMX240 Controller<br>(incompatible with New Sunny 512 Controller) | Fixtures with DMX functions                         |
| DMX Plug Rotatable Angle        | 270°                                                                                | 270°                                                |
| Controlling Distance            | Max. 300m (in an open and barrier-free environment)                                 | Max. 300m (in an open and barrier-free environment) |
| Working Environment Temperature | -20~45°C                                                                            | -20~45°C                                            |
| Dimension                       | 141*96*26mm                                                                         | 110*53*26mm                                         |
| Net Weight                      | 89g                                                                                 | 80g                                                 |



# LENS & GOBOS

FLS5/FLS8/FLS10



Godox offers a complete Fresnel system, allowing all Godox COB lights to easily enhance their intensity with a compatible Fresnel lens, regardless of their mount. Built with class-leading technology to intensify the LED light, the Fresnel lenses empower your lights to deliver an even brighter beam and render consistent luminescence with smooth intensity.

Key Features

- Intensify the Output  
The Godox Fresnel Lenses can multiply the output of Godox LED lights.
- Variable Beam Angle  
Beam thrown by the Fresnel Lenses can be adjusted from a spot angle to a flood one.  
FLS5: 10°~35°/FLS8: 10°~40°/FLS10: 10°~35°
- Robust Construction  
The ergonomic and sturdy build of the Godox Fresnel Lenses ensures minimized light leaks and rugged durability.
- Compatible with Barndoors  
Compatible with the Godox 8-leaf barndoors to precisely cut and shape the light for more creative expressions.



FLS5+LB-03

FLS5 is compatible with Godox LED lights which adopt Godox Mount, such as ML60, ML60Bi, ML30, ML30Bi.

FLS10+LB-02

FLS10 is compatible with all Godox Bowens Mount LED lights.



FLS8+LB-01

FLS8 is compatible with the majority of Godox Bowens Mount LED lights.

\*M600D and M600Bi are incompatible owing to their particular rings.

Tech Specs

| Model                 | FLS5         | FLS8          | FLS10         |
|-----------------------|--------------|---------------|---------------|
| Adjustable Beam Angle | 10°-35°      | 10°-40°       | 10°-35°       |
| Working Temperature   | -10°C~40°C   | -10°C~40°C    | -10°C~40°C    |
| Dimension             | 147*147*61mm | 246*246*121mm | 295*295*135mm |
| Weight                | 0.42kg       | 2kg           | 3kg           |

ML-SP Seires



Key Features

- Godox Mount
- 360° Rotatable Design
- Sharp Edges and Crystal-clear Images
- Superior Heat Management
- Expansive Lens Options
- Versatile EF-Mount

Tech Specs

| Model                       | Dimension≈    | Net Weight≈ |
|-----------------------------|---------------|-------------|
| Projection attachment ML-SP | 134*134*129mm | 697g        |
| Lens 19°                    | 107*65*65mm   | 427g        |
| Lens 36°                    | 64*65*65mm    | 255g        |
| Lens 50°                    | 93*65*65mm    | 392g        |

Optional Purchase



BP-SE Seires



Key Features

- Unique Design for Flat Bowens Mount
- 360° Rotatable Design
- Sharp Edges and Crystal-clear Images
- Superior Heat Management
- Expansive Lens Options
- Versatile EF-Mount

Tech Specs

| Model                            | Dimension     | Net Weight |
|----------------------------------|---------------|------------|
| Projection tube (excluding lens) | 220*220*118mm | ≈1.3kg     |
| 65mm Lens                        | 80*80*83mm    | ≈0.5kg     |
| 85mm Lens                        | 80*80**89mm   | ≈0.5kg     |
| 150mm Lens                       | 80*80*129mm   | ≈0.7kg     |

Optional Purchase



BLP Seires




Meet the BLP, where creativity merges with playfulness. 360° rotatable design allows for effortless adjustment of projection patterns. And with superior heat management, expansive lens options, and endless creative accessories, the BLP serves as a perfect tool for artists and creators. Beyond just lighting, the BLP is a catalyst for artistic brilliance.

Key Features

- 360° Rotatable Design
- Expertly Crafted Lenses for Clear & Sharp Visuals
- Superior Heat Management
- Expansive Lens Options(48mm, 65mm, 85mm, and 150mm)
- Versatile EF-Mount
- Bowens Mount for Wide Compatibility
- Abundant Creative Accessories




The lens barrel can be rotated 360°

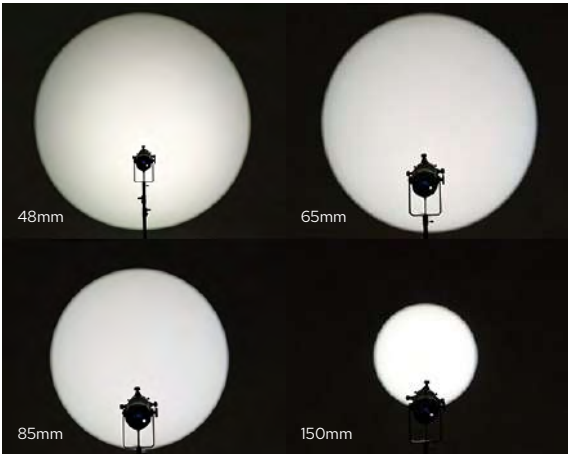

Enrich lens ecology




Cut slice  
Control beam shape

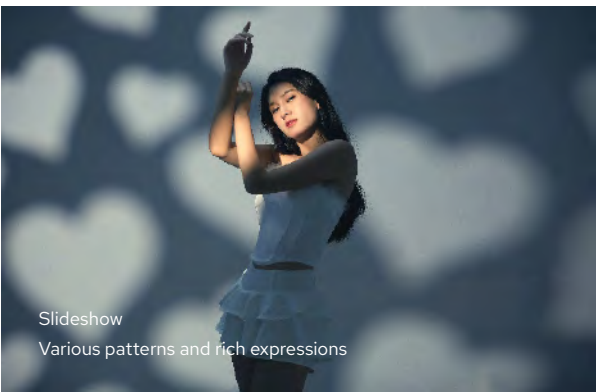

Slideshow  
Various patterns and rich expressions



Color Film  
Colorful background creates atmosphere

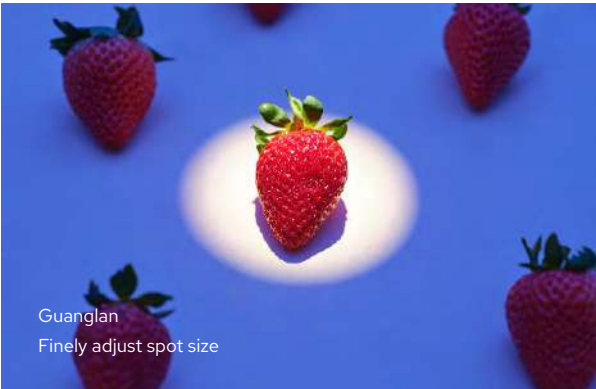

Guanglan  
Finely adjust spot size

Optional Purchase



Tech Specs

| Projection Attachment | Dimension     | Net Weight |
|-----------------------|---------------|------------|
| (excluding lens)      | 220*220*166mm | ≈1.3kg     |
| 48mm Lens             | 104*104*160mm | ≈1.2kg     |
| 65mm Lens             | 80*80**72mm   | ≈0.5kg     |
| 85mm Lens             | 80*80*88mm    | ≈0.5kg     |
| 150mm Lens            | 80*80*129mm   | ≈0.7kg     |

illuminance Data

| Distance | Illumination unit | Bare lamp M300Bi | 65mm  | 85mm  | 150mm |
|----------|-------------------|------------------|-------|-------|-------|
| 3m       | lux               | ≈1570            | ≈1170 | ≈1930 | ≈4890 |
|          | fc                | ≈146             | ≈109  | ≈179  | ≈454  |
| 4m       | lux               | ≈825             | ≈655  | ≈1090 | ≈2730 |
|          | fc                | ≈76.6            | ≈60.8 | ≈101  | ≈254  |
| 5m       | lux               | ≈531             | ≈420  | ≈692  | ≈1710 |
|          | fc                | ≈49.4            | ≈39   | ≈64.3 | ≈159  |

# ACCESSORIES

## Projection Attachment


SA-17


### SA-17

Godox SA-17 Adapter for Bowens-mount LED lights to Projection Attachment, with its solid construction, allows you to use Godox SA-P Projection attachment with any of your Bowens-mount LED Lights for achieving a greater degree of control with your light.

#### Extending the SA-P Projection Attachment's Compatibility

The adapter allows COB Bowens-mount LED lights users to release their boundless creativity by matching with SA-P projection attachment to achieve their desired effects. For users who already own S30 focusing light, now they can go beyond S30 and use the adapter to serve for a broader range of Bowens-mount LED lights. Equipped with built-in optical lens, the adapter provides excellent optical performance, assuring light output that's even from edge to edge.

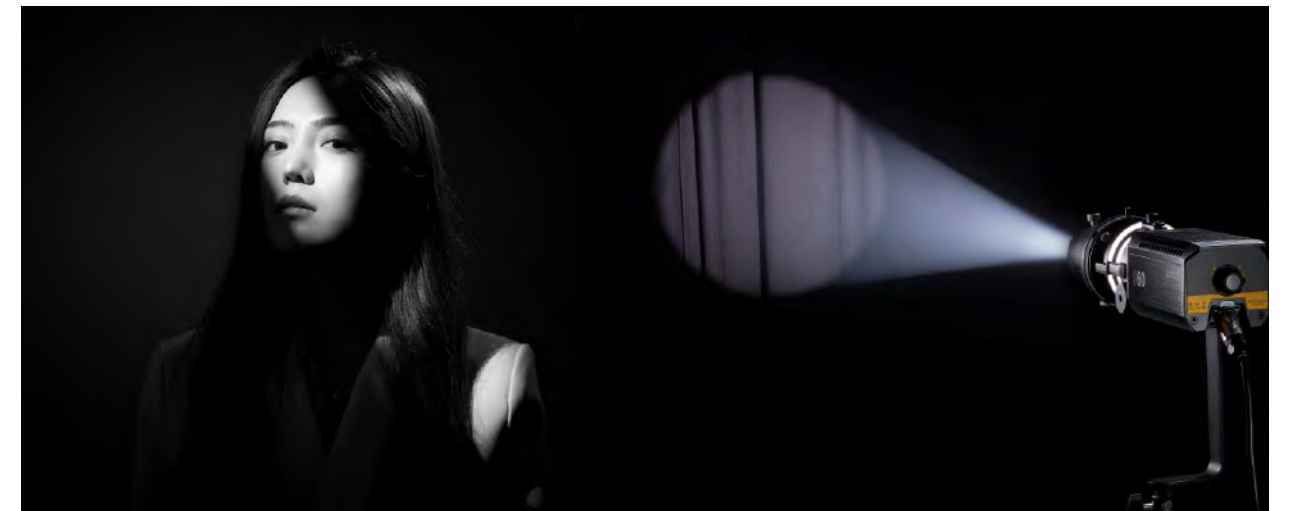

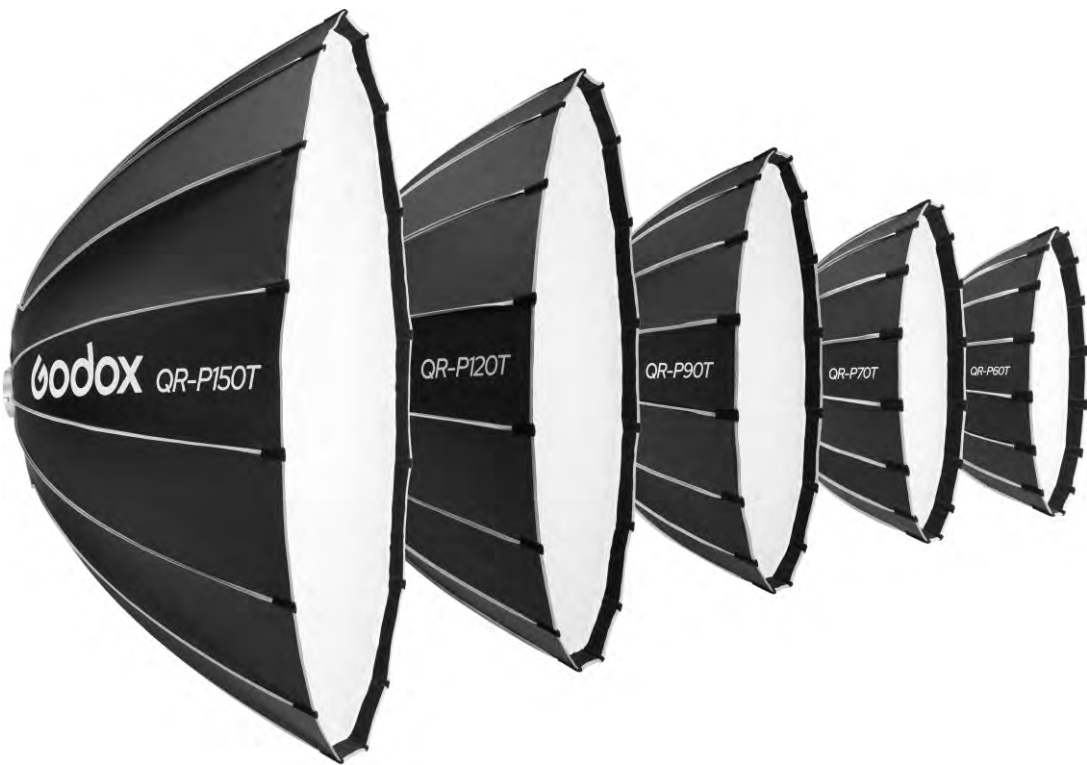

QR-P150T   QR-P120T   QR-P90T   QR-P70T   QR-P60T

QR-P series boasts a more compact design in comparison to its predecessors within the same series.Crafted as a softbox tailored for small-space live streaming and video production, its quick-release system simplifies setup and breakdown.The internal diffuser design, tightly connected with Velcro, ensures perfect diffusing result. Available in five diameters(2',2.3',3' 4', and 5'), it proves to be the ideal companion for on-site and small-space shooting.

Key Features

- Compact & space-saving
- Quick-mount design enables easy setup and dismantling
- Double-layered soft light cloth for dual soft light effects
- Optional grids for precise light control
- Grid models: QR-P60T-G, QR-P70T-G, QR-P90T-G, QR-P120T-G,QR-P150T-G
- Bowens mount, compatible with optional mounting plates for versatility



The inner diffuser is closely attached to the softbox with Velcro, ensuring perfect diffusing result.

Bowens-Mount Capability

SA-GD(optional)  
Speed Ring for Godox

SA-PF(optional)  
Speed Ring for Profoto

SA-BR(optional)  
Speed Ring for Broncolor

Tech Specs



QR-P60T/P70T/P90T/P120T/P150T

|                        |    |                       |    |
|------------------------|----|-----------------------|----|
| Softbox                | ×1 | Inner Fabric Diffuser | ×1 |
| Front Fabric Diffusers | ×1 | Carring Bag           | ×1 |

| Model    | Net Weight | Dimension(Depth x Diameter) |
|----------|------------|-----------------------------|
| QR-P60T  | 0.771kg    | 29.8*60cm                   |
| QR-P70T  | 0.830kg    | 34.1*70cm                   |
| QR-P90T  | 1.359kg    | 42.7*90cm                   |
| QR-P120T | 1.781kg    | 56.7*120cm                  |
| QR-P150T | 2.386kg    | 70.2*150cm                  |



CS-50T


CS-65T

CS-85T

CS-50T/CS-65T/CS-85T, the ideal soft lighting source for small spaces. With heights ranging from 1.1' to 1.8' when fully expanded, the CS-T series Softbox with a shallower depth offer exceptional versatility in compact settings, emitting soft and uniform lighting in all directions. They are perfect for live streaming and video recordings.

Key Features

- Standing at heights of just 1.1', 1.4', and 1.8'
- Quick-mount design for effortless installation with a single press
- 270-degree beam angle for soft, uniform lighting
- Detachable skirt for precise light control
- Universal Bowens mount, compatible with various lights
- Optional interchangeable mounting plates: SA-PF/SA-BR/SA-GD

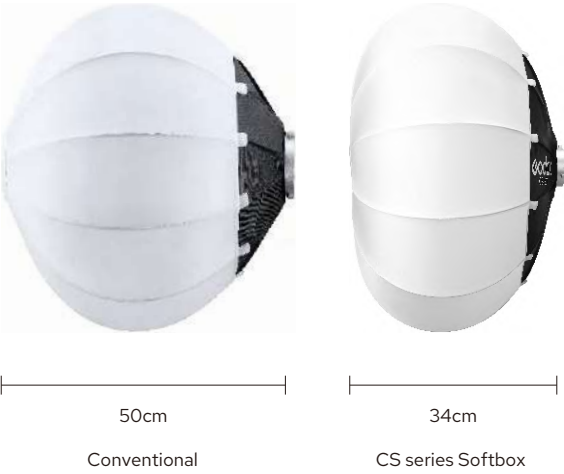

The diffuser is securely fastened to the frame with Velcro tape, keeping the umbrella ribs in place, enabling the Softbox to expand and collapse in just one second, greatly enhancing workflow efficiency.



Achieve precise light control with the detachable skirt, easily attachable to the Lantern, allowing you to eliminate unwanted bouncing light by rolling it up or down.


Tech Specs

| Model  | Net Weight | Dimension (Depth x Diameter) |
|--------|------------|------------------------------|
| CS-50T | 0.869kg    | 33.5*50cm                    |
| CS-65T | 0.129kg    | 41.8*65cm                    |
| CS-80T | 1.400kg    | 54.1*85cm                    |



CS-50T/CS-65T/CS-85T

Softbox                      ×1                      Carrying Bag                      ×1

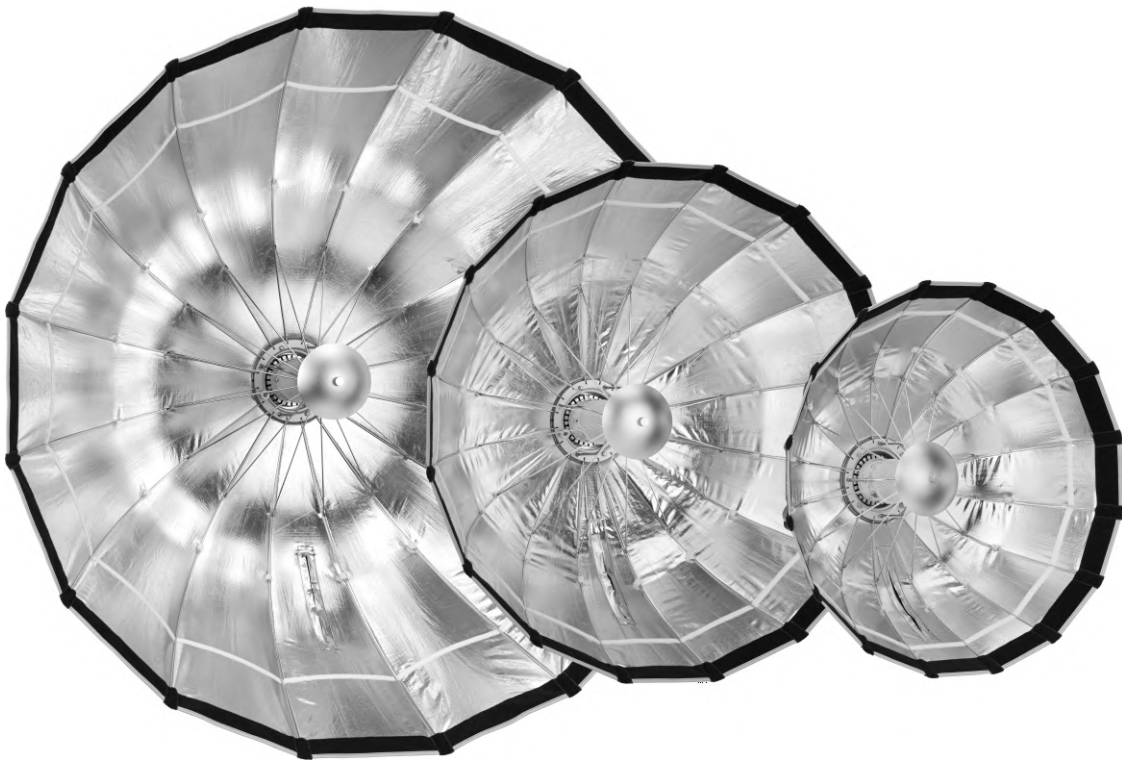

S120T

S85T

S65T


Godox Quick Release Umbrella Softbox adopts an effortless quick-release mechanism for hassle-free set-up and breakdown. Highly versatile and compact, the Quick Release Umbrella Softbox ensures efficient creation. Available in 3 different sizes, the Godox Quick Release Umbrella Softbox adopts an effortless quick-release mechanism for hassle-free set-up and breakdown. Highly versatile and compact, the Quick Release Umbrella Softbox ensures efficient creation. Available in 3 different sizes, the lightweight quick-release softbox is your ideal choice for home, studio, and travel.

Key Features

- Quick Release Mechanism
- Crafted with shadow design(11.8inch depth)
- Lightweight Beauty Dish
- Versatile Compatibility
- Compact and portable



Designed for shooting on-the-go, it is foldable and highly portable, ideal for location, ensuring convenience wherever you are.

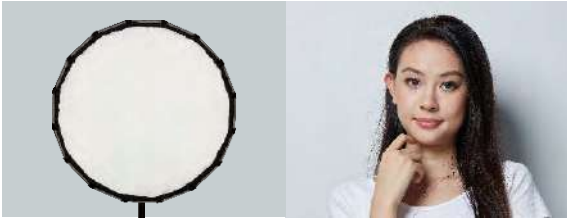

With the deflector plate (optional) and the silver interior, you can have a soft look but with an edge of crispness, just like the lighting effects achieved by a beauty dish, but a more lightweight one.



| S65T/85T/120T |    |                |    |
|---------------|----|----------------|----|
| Softbox       | ×1 | Inner Diffuser | ×1 |
| Carring Bag   | ×1 | Front Diffuser | ×1 |

Optional

| Grid    | Deflector Plate | Speed Ring           |
|---------|-----------------|----------------------|
| S65T-G  | S65T-P          | SA-GD for Godox      |
| S85T-G  | S85T-P          | SA- BR for Broncolor |
| S120T-G | S120T-P         | SA-PF for Profoto    |

Tech Specs

| Model                    | S65T    | S85T    | S120T   |
|--------------------------|---------|---------|---------|
| Diameter Open            | 65cm    | 85cm    | 120cm   |
| Depth Open               | 30cm    | 38cm    | 49cm    |
| Collapsed Softbox Length | 42cm    | 56cm    | 78cm    |
| Net Weight               | 0.851kg | 1.016kg | 1.424kg |



AD-S60S

Compatible with AD300Pro/ML60/ML60Bi, comes with grids  
Godox AD-S60S is a dedicated softbox with silver interior finish and parabolic reflecting shape to deliver indirect lighting and create distinct contrasts. The softbox has native Godox mount to snap onto the AD300Pro or ML60/ML60Bi in no time, comes with two levels of diffusion to create degrees of increased softness, includes grids for extra beam directing, and has zippered slot for cables and cord placement on the side.



The Godox mount softboxes comes with a grid that eliminates spill light and provides the directional control that facilitates selective lighting.

AD-S65S/AD-S65W

Compatible with AD300Pro/AD400PRO/ML60/ML60Bi, comes with grids  
The parabolic softbox has two model AD-S65S with silver lining and AD-S65W with white lining. AD-S65 softbox adopts parabolic box design to offer soft and even light effects for shooting. The shape of the softbox allows the user to control precisely where the light falls and soften the light stream and is built on the basis of a quick folding mechanism.



If you want a cool-toned look with snappy contrast, attach the silver reflector inside the umbrella. If you want a soft, warm rendition attach the gold reflector. The removable front diffuser makes it easy.

AD-S85S/AD-S85W

Compatible with AD300Pro/AD400PRO/ML60/ML60Bi, comes with grids  
With deep design to output soft light with a sharp falloff, Godox AD-S85 makes feathering and edge-lighting simple. The included fabric grid thwarts spill light and offers directional control necessary for selective lighting. Its quick-folding mechanism allows you to set up and break down quickly.



CS-85D/CS-65D

Godox Collapsible Lantern Softbox CS-85D/CS-65D is perfect for use overhead or to raise the ambient illumination level. With a 270 degree beam angle, the light is ideal for video recording, live streaming, film making, and still life photography.

Key Features

- Extremely Fast Setup
- Stunning, Soft, Omni-Directional Light
- Bowens Mount Compatibility
- Optional skirts for beam spread control



Thanks to its simple and durable design, this softbox is a breeze to use. The lantern can be popped open or closed in mere seconds.

Purchase skirt for achieving better light control Skirt Set for Lantern Softbox (Available for Purchase)SS-65 for CS-65D/SS-85 for CS-85D






P90L/P90H

Godox Parabolic Softboxes are the essential modifier for commercial, fashion, and portrait photographers. There are two version for choice, P90L for Lighy Version and P90H for High Temperature Resistant Version. P90L/P90H series adopt deep parabolic box design,which enables light to be sent out straightly and brightness, offering even, soft, and high saturation light effects for shooting with easy installation, great portability. P90L/P90H comes with removable one-stop outer and inner diffusers to achieve different levels of contrast. A carry bag is included for storage and transport.

P120L/P120H

Godox P120L/P120H softbox is useful for stunning fashion and portraiture images. Same as P90L/P90H, the P120 softbox also has two version. P120L/P120H is a 16-sided light-shaper offering focused, soft output with a punchy, crisp edge that lends dimension and detail to your subject as well as natural-looking catchlights in their eyes. The parabolic design yields soft, focused light with a crisp edge. With removable outer and inner diffusers, it can achieve desired contrast. A carry bag is included for storage and transport.

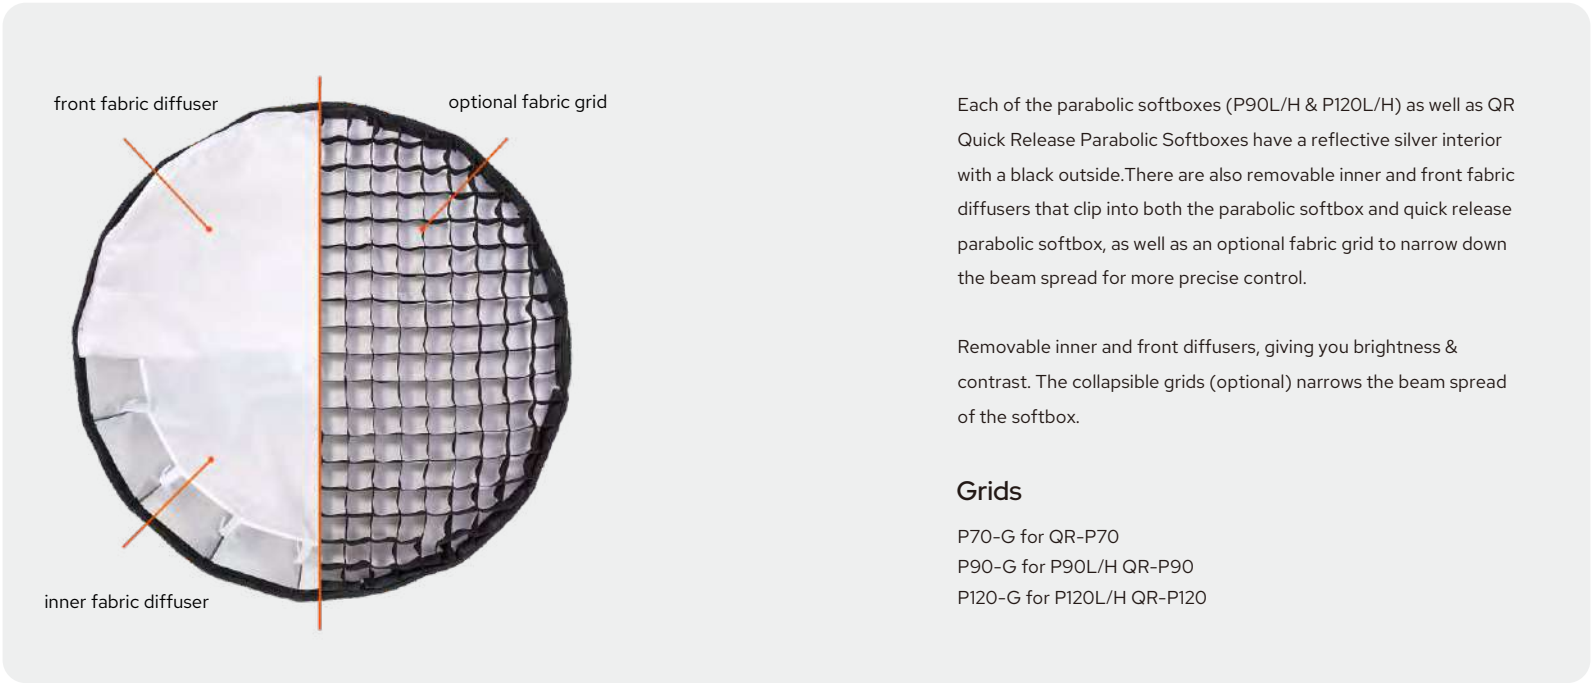

QR-P70/P90/P120

The Godox quick release parabolic softbox adopts an impressive quick release system for rapid setup and breakdown. Highly versatile and compatible, it provides you reliable light quality and various creative expressions. Available in three different sizes, this fast and easy to use softbox is deal companion for your indoor and on location shootings

Key Features

- Reflective silver interior to render a punchy high contrast
- Removable inner and front fabric diffusers
- Impressive quick release system for rapid setup and breakdown
- Reliable light quality and various creative expressions
- Bowens mount strobes and continuous light compatible

Parabolic Softbox | Quick Release Bowens Mount

QR-P70/P90/P120

Compatible with any flash head or monolight that uses the popular Bowens accessory mount; The softbox can also mount with Godox mount and Profoto mount accessory via attaching the SA-GD Godox mount adapter (optional) and SA-PF2 Profoto mount adapter (optional). And speed ring SA-BR2 is for adapting Broncolor lights.



As it folds down into an easy carry bag, it's extremely portable and therefore ideal to use on location.



Effortless Softbox Setup

The easiest way to put the softbox up is to click two rods on opposite sides up at the same time. Once they're all clicked into place, you simply Velcro the top panels of the softbox together to prevent light leakage.



To take the softbox down again, you simply lift the rod slightly whilst pressing down the button above it.

In this way,you can have the softbox assembled in mere minutes.



Softbox | Bowens Mount

Godox offers sofboxes with Bowens mounting, which fits most of Godox flash heads or other brands with the widely used Bowens front accessory mount. Ideal for all types of photo work, Godox softboxes render a soft, flattering quaity of light with manageable contrast. There are SB-FW Series, SB-USW Series, and SB-GUE Series include grids to offer drectional control of the output, keeping light off the background, and allowing you to light specific areas of your subject.



Square Softbox

Model: SB-BW-6060/9090  
Sizes (W×H): 60x60cm,90x90cm



Rectangular Softbox

Model: SB-BW-6090/70100/80120  
Sizes (W×H): 60x60cm,70x100cm,80x120cm



Strip Softbox

Model: SB-BW-50130/35160  
Sizes (W×H): 50×130cm,35×160cm



Octagon Softbox

Model: SB-BW-95/120/140  
Sizes: 95cm,120cm,140cm



Square Softbox with Grid

Model: SB-FW-6060/9090  
Sizes (W×H): 60x60cm,90x90cm



Rectangular Softbox with Grid

Model: SB-FW-6090/70100/80120  
Sizes (W×H): 60x60cm,70x100cm,80x120cm



Strip Softbox with Grid

Model: SB-FW-50130/35160  
Sizes (W×H): 50×130cm,35×160cm



Octagon Softbox with Grid

Model: SB-FW-95/120/140  
Sizes: φ95cm,φ120cm,φ140cm



UL-BOX-30\*45/45\*60/60\*90/90\*120



UL-BOX-40/60/90



UL-BOX Octa-60/90/150



UL-BOX-30\*90

The Godox UL-Series Quick Release Umbrella Softbox is designed for versatility and precision. With a variety of shapes, sizes, and compatibility options, it provides a flexible toolkit for effortlessly creating impactful portraits, product shots, and still-life imagery.

Key Features

- Variety of Sizes: Octagonal, strip, rectangular, and square options (30cm to 180cm).
- Quick Set-Up: Opens and closes like an umbrella.
- Light Shaping: Optional diffuser and edge mask for customized lighting.
- Portable: Lightweight and collapsible for easy transport.
- Wide Compatibility: Bowens mount, compatible with strobes and continuous lights.



Sample Softbox: UL-BOX Octa-60

(other sizes/shapes available).

UL-KIT-PRO Softbox Pro Kit with Diffuser & Grid

|  |           |    |  |             |    |  |                |    |
|--|-----------|----|--|-------------|----|--|----------------|----|
|  | Softbox   | x1 |  | Inner White | x1 |  | Grid           | x1 |
|  | Carry Bag | x1 |  | Outer White | x1 |  | Diffuser Plate | x1 |

Tech Specs

| Model           | Net Weight | Diameter Open | Depth Open | Folded Length |
|-----------------|------------|---------------|------------|---------------|
| UL-BOX Octa-60  | 800g       | 60cm          | 39cm       | 49cm          |
| UL-BOX Octa-90  | 1100g      | 90cm          | 57cm       | 83cm          |
| UL-BOX Octa-150 | 1750g      | 150cm         | 55cm       | 92cm          |
| UL-BOX-40       | 650g       | 40cm          | 33.5cm     | 43cm          |
| UL-BOX-60       | 850g       | 60cm          | 38cm       | 55cm          |
| UL-BOX-90       | 1150g      | 90cm          | 38cm       | 57cm          |
| UL-BOX-30*45    | 700g       | 30/45cm       | 33.5cm     | 42cm          |
| UL-BOX-45*60    | 800g       | 45/60cm       | 38cm       | 53.5cm        |
| UL-BOX-60*90    | 1000g      | 60/90cm       | 49.5cm     | 71cm          |
| UL-BOX-90*120   | 1550g      | 90/120cm      | 50cm       | 90cm          |
| UL-BOX-30*90    | 800g       | 30/90cm       | 42cm       | 63cm          |

Optional

| Edge Mask     | Speed Ring          |
|---------------|---------------------|
| UL-EM-120     | SA-GD               |
| UL-EM-150     | SA-BR2              |
| UL-EM-180     | SA-PF2              |
| UL-EM-60×180  |                     |
| UL-EM-90×120  | Diffuser Plate      |
| UL-EM-120×180 | UL-DP-RU            |
| Grid          | Inner/OuterWhiteKit |
| UL-G-60       | UL-IW&OW-O60        |
| UL-G-90       | UL-IW&OW-O90        |
| UL-G-120      | UL-IW&OW-O120       |
| UL-G-150      | UL-IW&OW-O150       |
| UL-G-30×90    | UL-IW&OW-O180       |
| UL-G-30×120   | UL-IW&OW-30×90      |
| UL-G- -60×180 | UL-IW&OW-30×120     |
| UL-G-30×45    | UL-IW&OW-60×180     |
| UL-G-45×60    | UL-IW&OW-30×45      |
| UL-G-60×90    | UL-IW&OW-45×60      |
| UL-G 90×120   | UL-IW&OW-60×90      |
| UL-G-40×40    | UL-IW&OW- 90×120    |
| UL-G-60×60    | UL-IW&OW-120×180    |
| UL-G-90×90    | UL-IW&OW-40×40      |
|               | UL-IW&OW-60×60      |
|               | UL-IW&OW-90×90      |

Lighting Stands & Mounting

90F

Foldable Floor Light Stand

60cm

48cm

87cm

55cm

1.2kg

3kg

25×5mm

22.4/19mm



190F

Adjustable Legs Light Stand

86/146cm

49cm

188cm

72cm

1.25kg

3kg

19×16mm

29.1/25.7/22.4/19/16mm



210F

Light Stand

100cm

51cm

213cm

65cm

1.4kg

2kg

29.1/25.7/22.4/19mm



240F

Light Stand

92cm

68cm

240cm

80cm

1.3kg

2kg

19mm

25.7/22.4/19/16mm



300F

Light Stand

108cm

86cm

300cm

90cm

1.7kg

3kg

22mm

29.1/25.7/22.4/19mm



Lighting Stands & Mounting

290F

Heavy Duty Light Stand

110cm

110cm

286cm

130cm

2.2kg

5kg

22mm

35/30/25mm



380F

Heavy Duty Light Stand

110cm

110cm

380cm

145cm

2kg

5kg

22mm

35/30/25/20mm



240CS

C-Stand with Arm (Silver)

95cm

130cm

237cm

158cm

6kg

10kg

25mm

35/30/25mm



270CS

C-Stand with Arm (Silver)

95cm

140cm

270cm

168cm

6.3kg

10kg

25mm

35/30/25mm



240FS

Wheeled Light Stand

110cm

120cm

240cm

35cm

6.3kg

10kg

35mm



420LB

Light Boom Stand with Weight Bag

109cm

125cm

422cm

129cm

4.3kg

5kg

25mm

36/30/25/20mm



LA-300

Light Stand

100cm

88.5cm

300cm

88cm

1.86kg

3kg

22mm

35/25mm



LA-302

Light Stand

70cm

70cm

190cm

66cm

0.65kg

5kg

16mm

22/16mm



LA-303

Light Stand

112cm

97cm

260cm

97cm

1.5kg

6kg

22mm

31.5/25.7mm



LA-304

Light Stand

80cm

73cm

200cm

70cm

1.037kg

5kg

19mm

25/22/19mm



BS-04

Retractable Background Stand with Carrying Bag

97cm

260cm

3

300cm



SA5015

Heady Duty Steel Roller Stand

168cm

92cm

10.4kg

40kg

Key Features

- Weight capacity of 40kg.
- Unfolded height ranges from 92cm to 168cm.
- Features adjustable legs for versatility.
- Equipped with a 1-1/8" Junior receiver.
- Comes with a retractable 5/8" pin which can be swung 90 degrees.



SA5045

Heady Duty Steel Roller Stand

450cm

146cm

16.2kg

40kg

Key Features

- Weight capacity of 40kg.
- Unfolded height ranges from 146cm to 450cm.
- Features adjustable legs for versatility.
- Equipped with a 1-1/8" Junior receiver.
- Comes with a retractable 5/8" pin which can be swung 90 degrees.



Lighting Stands & Mounting

FH01

Light Boom Holder



Designed for mounting a boom arm to a heavy-duty stand. It makes tilt and swivel adjustments of the boom arm quick and simple.

FH02

Lighting Holder



The FH02 Lighting Holder is designed to accept an umbrella and light or two lights for easy attachment to a standard light stand.

FH03

Reflector Boom Holder



The FH03 Reflector Boom Holder allows you to attach up to two RMA-01 reflector mounting arms onto a light boom.

LSA-14

Boom Extension Arm



Easily extended, good stability, high load capacity.

LSA-15

Boom Extension Arm



This boom arm with clamp features aluminum construction and is telescopically adjustable between 27.5 and 67" in length.

LSA-16

Boom Arm with Reflector Holder



The boom arm has a large handle that allows angle adjustments and locks it in place by friction.

RMA-01

Reflector Mounting Arm

Reflector Mounting Arm can hold a wide variety of reflectors with its plastic clips. The arm mounts to a light stand via its mini grip head which allows it to be turned to obtain the required angle for the desired degree of reflectors.



Carrying Bag

CB Series

LS-01

Multi-function Clamp



Multi-function Clamp can be installed on the light stand to attach small studio accessories or hang objects.

LS-02

Multi-function Clamp



LSA-03/LSA-19

Nano Clamp/Clamp



LSA-19 clamp is compact accessory that allows you to attach with V-mount accessories such as V-mount batteries. Use it with Godox LSA-03 nano clamp you can mount them to a light stand or tripod easily.

LSA-06

Wheel for Light Stand



Step-On lock design locks the wheel from rolling

LSA-07

Wheel for Light Stand



LSA-08

Flexible Arm



Flexible and strong enough to hold Shoe-Mount strobes at all angles to reduce unwanted reflections

LSA-09

Heavy Duty Flexible Arm



The two arms can be freely adjusted and locked by the knob

LSA-04

Magic Arm



LSA-05

Extension Arm



The extension arm is designed for attaching to a Convi clamp for hanging a light or a camera from a light stand or pole

LSA-13

Sky Hook



For hanging accessories

LSA-11

Laptop Tray



An aluminum platform to hold your laptop on a camera stand. Especially held on the laptop tray LSA-12, the cables of the laptop can be fixed on all edges of the holder with cable ties, thus preventing them being pulled out.

LSA-12

Laptop Tray



LSA-10

Dual Mount Arm



The dual mount arm features four separate mounting points-two heads on the sides of the arm and two heads on a 90°perpendicular angle



CB-32

Dimensions: 46.5\*22.5\*35cm  
Recommended placing items: ML30-K2/ML30Bi-K2



CB-33

Dimensions: 55\*24\*39cm  
Recommended placing items: ML-Kit1/ML-Kit2



CB-23

Dimensions: 37.7\*17\*8.5cm  
Recommended placing items: TL30-K2



CB-39

Dimensions: 77.5\*22.5\*7.5cm  
Recommended placing items: TL60-K2



CB-22

Dimensions: 37.7\*26.7\*8.5cm  
Recommended placing items: TL30-K4



CB-40

Dimensions: 78\*36.5\*8cm  
Recommended placing items: TL60-K4



CB-05

Dimensions: 74\*26\*27cm  
Recommended placing items: SL60W Two Light Kit



CB-08

Dimensions: 52\*30\*39.5cm  
Recommended placing items:  
LED500C/LED500W/LED500LRC Kit-1/LED500LRC Kit-2



CB-14

Dimensions: 52\*15\*15cm  
Recommended placing items: S30-D light stand



CB-52

Dimensions: 53\*16\*16cm  
Recommended placing items: S60Bi Light stand



CB-04

Dimensions: 78\*24\*24cm  
Recommended placing items: SL100D-K2/SL100Bi-K2



CB-08

Dimensions: 52\*30\*39.5cm  
Recommended placing items:  
LED500C/LED500W/LED500LRC Kit-1/LED500LRC Kit-2



CB-49

Dimensions: 55\*26\*39cm  
Recommended placing items: M300D



CB-51

Dimensions: 38.5\*27\*64cm  
Recommended placing items: S60Bi-K3



CB-64

Dimensions: 57\*29.5\*24cm  
Recommended placing items: VL300II



CB-34

Dimensions: 136\*29.5\*61cm  
Recommended placing items: M600D



CB-37

Dimensions: 57.5\*30.5\*28cm  
Recommended placing items: VSA-19K/VSA-26K/VSA-36K



CB-63

Dimensions: 51\*29.5\*24cm  
Recommended placing items: VL200II



CB-62

Dimensions: 51\*29.5\*24cm  
Recommended placing items: VL150II



CB-47

Dimensions: 125.2cm\*29.3cm\*12.9cm  
Recommended placing items: TL120-K4



CB-65

Dimensions: 36\*29.5\*64cm  
Recommended placing items: M600Bi



CB-66

Dimensions: 69\*26.5\*29cm  
Recommended placing items: FL100-K2/FL150S-K2 kit