

Godox

Godox

GODOX Photo Equipment Co.,Ltd.

Factory Add: 4th Floor of Building 1, 1st to 4 th Floor of Building 2, 4th Floor of Building 3,1st to 4th Floor of Building 4,
Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China

TEL: +86-(0)755-25701197,25726373

FAX: +86-(0)755-25723423

Email: godox@godox.com

www.godox.com

KNOWLED CINEMATIC LIGHTING ECOSYSTEM



Knowled Take You Further

At Godox, we have always been dedicated to providing a comprehensive range of lighting solutions for filmmakers and content creators. KNOWLED series, in particular, stands as a testament to our commitment to elevating the standards of professional production.

In the dynamic world of film and television production, lighting plays a pivotal role in shaping narratives, evoking emotions, and capturing moments in their full splendor. With KNOWLED cinematic lighting ecosystem, we empower filmmakers with the tools they need to bring their creative visions to life.



CONTENTS

05	•	COB Light MG6K MG4KR MG4K MG1200R MG1200Bi M1000R M600R M600Bi Pro/M600Bi M300R	
41	•	MS Series MS60R/Bi	
45	•	Panel Light P1200R Hard P4/P600R Hard P8 P1200R Hard PRO/P600R Hard PRO P600R Hard/P1200R Hard P300R/P600R P600Bi Hard	
69	•	Flexible LED Mat AM1600R F100R/F200R/F200SR/F400R/F800R F200Bi/F400Bi/F600Bi	
85	•	Tube Light TP2R/TP4R/TP8R	
91	•	Air Tube Light AT200Bi	
95	•	Ambient Light C5R/C7R/C10R	
101	•	Cine Lighting Reflector LiteFlow 7/15/25/50/100	
107	•	Control System KNOWLED APP	
109	•	Accessory BeamLight Max90 BeamLight B60/Max60 <i>G Mount Projection Attachment</i> GP19K/26K/36K <i>Flat Bowens Mount Projection Attachment</i> BP-19K/26K/36K <i>Motorized Zoom Beam Bracket</i> <i>Motorized Fresnel</i> <i>Fresnel Lens</i> GF14/FLS8/FLS10 <i>Adjustable Diffusion</i> AD21/AD32/AD33 <i>Scrim Flag</i> SF6090/SF4560 Kit <i>Parabolic Softbox</i> QR-P70/P90/P120 <i>Softbox Series</i> SB Series <i>Lighting Stands</i>	

KNOWLED COB LIGHTS



SPECS

Model	MG6K	MG4KR	MG4K	MG1200R	MG1200Bi
Luminance(with reflector)	41,000Lux with MGR30 @5m(5600K)	225,100Lux with MGR20 @3m(5600K)	25,600Lux with MGR30 @5m(5600K)	118,000Lux with GR15 @3m(5600K)	149,000Lux with GR15 @3m(5600K)
Color Version	Bi-color	Full-color	Bi-color	Full-color	Bi-color
CCT	2800K-10000K	1800K-10000K	2800K-10000K	1800-10000K	2800K-6500K
Max. Power	4300W	3100W	2300W	1600W	1400W
Color Rendering	CRI≈97/TLCI≈97	CRI≈97/TLCI≈96	CRI≈97/TLCI≈98	CRI≥96/TLCI≥95	CRI≥96/TLCI≥96/TM-30 Rf≥92
GM Adjustment	-100%-100%	-100%~100%	-100%-100%	/	/
Weather Resistance	IP65	IP65	IP65	IP65	IP65
Controls	CRMX/Ethernet/DMX/ APP/On-board	CRMX/Ethernet/DMX/ APP/On-board	CRMX/Ethernet/DMX/ APP/On-board	CRMX/Ethernet/DMX/ Removable panel/APP/On-board	CRMX/Ethernet/DMX/Removable panel/ App/On-board/Remoter
Power Supply	AC	AC	AC	AC	AC
Dimension					
Light Body	356*378*434mm	356*386*378mm	365*339*300mm	400*589*339mm	378*579*354mm
Controller	270*210*421mm	238*177*330mm	238*177*330mm	189*174*404mm	162*190*372mm
Weight					
Light Body	25kg	23kg	10kg	9.8kg	16kg
Controller	12kg	6.9kg	6.4kg	6.7kg	6.68kg



SPECS

Model	M1000R	M600R	M600Bi Pro	M300R
Luminance(with reflector)	20,400Lux with GR30 @3m(5600K)	136,000Lux with BR45 @1m(5600K)	18,800Lux with BR60 @3m(5600K)	3,880Lux with BR30 @5m(5600k)
Color Version	Full-color	Full-color	Bi-color	Full-color
CCT	1800K-10000K	1800K-10000K	2800K-6500K	1800K-10000K
Max. Power	1150W	720W	650W	460W
Color Rendering	CRI≥95/TLCI≥94 DMX(RDM)/LumenRadio CRMX/	CQS≥95/CRI≥96/TLCI≥96	CRI≥97/TLCI≥98	CRI≈96, TLCI≈95
Weather Resistance	IP65	IP54	IP54	IP65
Controls	Ethernet (Art-Net & sACN)/ Bluetooth app/controller	CRMX/Ethernet/DMX/ App/On-board	DMX/LumenRadio CRMX/Etherne/Art-Net&sACN protocol/ Bluetooth app/remove controller control (controller is sold separately)	DMX 512 controller, support RDM protocol/ LumenRadio CRMX/Ethernet/Art-Net&sACN protocol/Bluetooth app/controller control
Power Supply	AC	AC	AC	AC & V-mount Battery
Dimension				
Light Body	7.8**7.4**14.53"/198*188*369mm	317*501*347mm	174*298*177mm	7.09**9.61*6.14"/180.09*244.09*155.96mm
Controller	7.44**6.34**12.64"/189*161*321mm	189*166*334mm	189*166*334mm	6.85**5.67*9.8"/174.09*144.02* 248.92mm
Weight				
Light Body	8.1kg	10kg	4.6kg	3.6kg
Controller	5.6kg	6kg	5.5kg	3.1kg



Brighter
Than a 6kW HMI



Lightweight
Design



Wide CCT range:
2800K-10000K



Adjustable +/-
Green Magenta



Comprehensive
G-mount ecosystem

MG6K

- Illuminance surpasses a 6kW HMI in brightness
- 24.5 kg/54 lb lighthead without yoke (28 kg/61 lb with yoke)
- CCT range: 2800K-10000K
- ±100% Green/Magenta adjustment
- 0.1% precision dimming increments
- 4 dimming curves
- CRI≈97, TLCI≈97
- 11 built-in FX modes
- Compatible with G-mount accessory ecosystem
- IP65-rated weather resistance
- High-efficiency heat dissipation
- Control options: DMX (RDM), LumenRadio CRMX, Ethernet (Art-Net & sACN), Bluetooth App, Controller

Bi Color LED Light | MG6K



41,000Lux

@5600K, 5m (with MGR30 reflector)

147,000Lux

@5600K, 5m (with MGR15 reflector)



+/- Green/Magenta Adjustment



Lightweight Design



Multiple-Light Arrays



Bi Color LED Light | MG6K



MG6K

Light Body	×1	Safety Rope	×1
U-type Bracket	×1	DC Power Cord	×1
Controller	×1	AC Power Cord	×1
Protection Cover	×1	Reflector MGR30	×1
Tying Rope	×1		



MG6K K1

Light Body	×1	DC Power Cord	×1
U-type Bracket	×1	AC Power Cord	×1
Controller	×1	Reflector MGR30	×1
Protection Cover	×1	Controller Mounting Device	×1
Tying Rope	×1	Flight Case	×1
Safety Rope	×1		



4K HMI
Brightness

225,100Lux

@3m, 5600K with MGR20



91% of the
Rec.2020

110°

Beam Angle

60%↑

Cooling Efficiency



G-Mount
Ecosystem

MG4KR

- True 4K HMI Brightness 225,100 Lux @3m (5600K, MGR20)
- The Brightest Full-color COB Light
 - (1). 24,600 Lux @3m (Red, MGR20)
 - (2). 40,500 Lux @3m (Green, MGR20)
 - (3). 13,400 Lux @3m (Blue, MGR20)
- 91% Rec.2020 & 1,800K-10,000K CCT & ±100% GM shift
- CRI 97, TLCI 96, TM-30RF 95
- 60% better cooling
- Ideal for single person setup
- 110° wide beam angle for soft and even lighting
- IP65 weather resistance
- Compatible with G-mount accessory ecosystem



The Brightest Full-color COB Light



4K HMI Brightness



Compact Design for Single Person Setup




MG4KR

Light Body	x1	Safety Rope	x1
U-type Bracket	x1	DC Power Cord	x1
Controller	x1	AC Power Cord	x1
Protection Cover	x1	Reflector MGR20	x1
Tying Rope	x1	Controller Mounting Device	x1



MG4KR K1

Light Body	x1	DC Power Cord	x1
U-type Bracket	x1	AC Power Cord	x1
Controller	x1	Reflector MGR20	x1
Protection Cover	x1	Controller Mounting Device	x1
Tying Rope	x1	Flight Case	x1
Safety Rope	x1		



4K Hmi
Brightness

110lm/W

Highest Luminous
efficacy

10kg

Light head
Weight



Green/Magenta
Adjustment

63mm

Smallest Emitting
Area



G-Mount

MG4K

- Brighter than 4kW HMI using 2000W instead of 4000W
- 124,000Lux @5m, 5600K with MGR15
- 25,600Lux @5m, 5600K with MGR30
- Compact design that 10kg for light head and 18.9kg for whole setup
- Highest optical efficiency by advanced light engine
- Engineered by 63mm, the smallest emitting area
- No extra blending component needed
- Optimal light concentration to enhance brightness
- 67% faster heat dissipation.
- G/M adjustment: $\pm 100\%$
- CCT range: 2,800K-10,000K
- IP65-rated weather resistance
- Compatible with G-mount accessory ecosystem

Bi Color LED Light | MG4K

25,600Lux

@5m, 5600K (with MGR30 30°reflector)

2000W

Power Output



Highest Optical Efficiency,Highest Luminous Efficacy in 110lm/W



10Kg for Light Head, Less than 19Kg for full setup



G/M adjustment: ±100%, CCT range: 2,800K-10,000K

Bi Color LED Light | MG4K



MG4K

Light Body	×1	Safety Rope	×1
U-type Bracket	×1	DCPower Cord	×1
Controller	×1	ACPower Cord	×1
Protection Cover	×1	Reflector MGR30	×1
Tying Rope	×1	Controller Mounting Device	×1




MG4K K1

Light Body	×1	DCPower Cord	×1
U-type Bracket	×1	ACPower Cord	×1
Controller	×1	Reflector MGR30	×1
Protection Cover	×1	Controller Mounting Device	×1
Tying Rope	×1	Flight Case	×1
Safety Rope	×1		



POWER
1500_w
High Output


Full Color


Lightweight Design


G-Mount Accessories

MG1200R


- Full-Color Lighting 1800K-10000K range for versatile effects.
- 1500W power with vivid color saturation.
- HSI, RGBW, GEL, X-Y, CCT, FX for creative use.
- Seamless Integration with Entire Setup.
- Only 9.8kg for easy handling.
- 0.1% precision for low-light adjustments.
- Flicker-Free at High Speeds.
- DMX, CRMX, Ethernet, Bluetooth with app integration.
- Leading Accessory Ecosystem.



Full-Color LED Light | MG1200R



Exceptional Lighting Performance

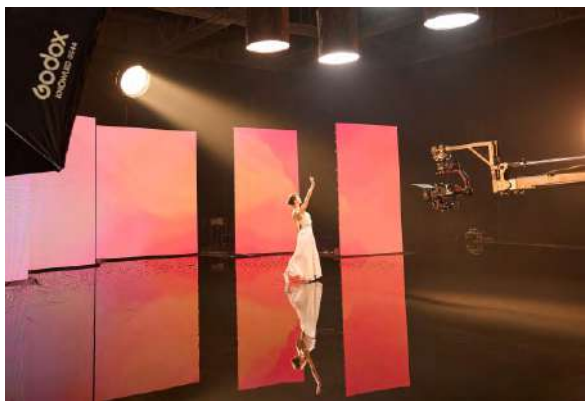

Full-color Stage shooting



Built for Easy Handling

Full-Color LED Light | MG1200R



MG1200R

Light Head	×1	Super Clamp	×1
Controller	×1	Tying Rope	×1
Protective Cover	×1	Safety Rope	×1
U-Bracket	×1	DC PowerCord	×1
Gr45 Reflector	×1	AC Power Cord	×1



MG1200R K1

Light Head	×1	Tying Rope	×1
Controller	×1	Safety Rope	×1
Protective Cover	×1	DC Power Cord	×1
U-Bracket	×1	AC Power Cord	×1
GR45 Reflector	×1	Carrying Case	×1
Super Clamp	×1		



MG1200R K2

Light Head	×1	Tying Rope	×1
Controller	×1	Safety Rope	×1
Protective Cover	×1	DC Power Cord	×1
U-Bracket	×1	AC PowerCord	×1
GR45 Reflector	×1	Protective Wheeled Case	×1
Super Clamp	×1		



MG1200R K3

Light Head	×1	Tying Rope	×1
Controller	×1	Safety Rope	×1
Protective Cover	×1	DC Power Cord	×1
U-Bracket	×1	AC Power Cord	×1
GR45 Reflector	×1	Flight Case	×1
Super Clamp	×1		

Bi-color LED Light | MG1200Bi



Bi-color LED Light | MG1200Bi



POWER
1200w
Power 1200W

IP65
Weather Resistance


2800K-6500K


G-Mount


86,100lux@3m
with Fresnel

MG1200Bi

- CCT: 2800-6500K
- 1200W power across all color temperatures
- CQS≥94, CRI≥96, TLCI≥96, R15≥92, TM-30 Rf≥92
- Controls: DMX & RDM, LumenRadio CRMX, Ethernet (sACN and ArtNet protocol), App control, 2.4GHz remote, on-board and removable panel
- Compatible with Godox G-Mount with a complete light shaping system
- IP65 weather resistance
- 0.1% stepless adjustment
- High efficient heat dissipation system
- 4 dimming curves
- 11 built-in FX effects
- 360° rotatable U-Type yoke
- 8-meters power cord and connecting cord



Bi-color LED Light | MG1200Bi



Night-for-day lighting



Studio set lighting



Sunlight-through-windows simulation

Bi-color LED Light | MG1200Bi



MG1200Bi

Light Body	×1	Power Cable	×1
U-type Bracket	×1	Carry Bag	×1
Controller	×1	Controller Mounting Device PC01	×1
Antenna	×1	Light Protection Cover	×1
Steel Rope	×1	DC Connect Cable	×1
Reflector GR45	×1		



MG1200Bi K1(3 reflectors included)

U-type Bracket	×1	DC Connect Cable	×1
Controller	×1	30° Reflector GR30	×1
Antenna	×1	45° Reflector GR45	×1
Steel Rope	×1	60° Reflector GR60	×1
Power Cable	×1	Soft Case SC01	×1
Controller Mounting Device PC01	×1	Reflector Case 1	×1
Light Protection Cover	×1		



MG1200Bi K2 (4 reflectors included)

Light Body	×1	DC Connect Cable	×1
U-type Bracket	×1	15° Reflector GR15	×1
Controller	×1	30° Reflector GR30	×1
Antenna	×1	45° Reflector GR45	×1
Steel Rope	×1	60° Reflector GR60	×1
Power Cable	×1	Soft Case SC01	×1
Controller Mounting Device PC01	×1	Reflector Case 2	×1
Light Protection Cover	×1		



MG1200Bi K3 (4 reflectors & hard case included)

Light Body	×1	DC Connect Cable	×1
U-type Bracket	×1	15° Reflector GR15	×1
Controller	×1	30° Reflector GR30	×1
Antenna	×1	45° Reflector GR45	×1
Steel Rope	×1	60° Reflector GR60	×1
Power Cable	×1	Hard Case HC01	×1
Controller Mounting Device PC01	×1	Reflector Case 2	×1
Light Protection Cover	×1		

G-Mount Accessory Ecosystem For MG Series

Reflector



MGR15
15° Reflector



MGR20
20° Reflector



MGR30
30° Reflector



MGR45
45° Reflector

Fresnel




GF14
Fresnel Lens



GF14B
Barndoor for Fresnel Lens



GF18M
Motorized Fresnel Lens



GF18M-BD4
Barndoor for GF18M

Softbox



GL3/GL4/GL7
Lantern Softboxes



GP3/GP4/GP5
Parabolic Softboxes



GS33/GS34/GS44
Rectangular Softboxes



GO3/GO4/GO5
Octa Softboxes

G-Mount Accessory Ecosystem For MG Series

BeamLight




MAX60
BeamLight Reflector



MAX90
BeamLight Reflector

Bracket

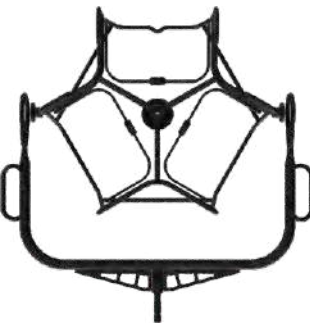

ZB03
Zoom Beam Bracket

Cables



DC Extension Cable Coupler
For MG4K



DC Extension Cable Coupler
For MG4KR/MG6K



DC Extension Cable Coupler
For MG1200Bi



DC Extension Cable Coupler
For MG1200R

Projection Attachment



GP26K
Projection Attachment
With 26° Lens



Lens 19° Lens 26° Lens 36° Iris Diaphragm
GP-ID



Gobo Set GP-GS2



Gobo Set GP-GS1



Gobo Set GP-GS3



Gobo Set GP-GS4



Gobo Set GP-GS5



GP-SKID
Skid for GP(for MG2400R/Bi MG6K)



GP-QB
Quick-Lock Bracket(for MG2400R/Bi MG6K)



Full-color Adjustable



High Power



Compact Design



Bowens Mount



Weatherproof



Godox Optical System

M1000R

- 1000W full-color point source with Bowens Mount
- Bright and saturated RGB output
- Compact and lightweight for fast, mobile setups
- Enhanced Bowens Mount for advanced optical modifiers
- Compatible with Godox Optical System for precise light control
- Wide CCT range (1800K-10,000K) with $\pm 100\%$ G/M adjustment
- 14 built-in lighting effects
- IP65-rated weather resistance
- Built-in CRMX, supports DMX512, RDM, Art-Net, sACN, Bluetooth App

Full-color LED Light | M1000R



Lightweight Design, Built to Move



Bright, Bold, Full-Color Output



Godox Optical System, Native Integration

Full-color LED Light | M1000R



M1000R

Light Body	×1	Tying Rope	×1
U-type Bracket	×1	Safety Rope	×1
Controller	×1	DC Power Cord	×1
Protection Cover	×1	AC Power Cord	×1
Reflector BR30	×1	Controller Mounting Device	×1



M1000R K1

Light Body	×1	Safety Rope	×1
U-type Bracket	×1	DC Power Cord	×1
Controller	×1	AC Power Cord	×1
Protection Cover	×1	Controller Mounting Device	×1
Reflector BR30	×1	Carrying Case	×1
Tying Rope	×1		



M600R

- Full-color capability
- CCT: 1800K-10000K
- Color light brightness greatly surpassing similar lights at equal power
- 136,000 lux with Reflector BR45 at 1 meter
- Innovative optical design for high-quality output, reduced heat, and longer lifespan
- IP54 weather-resistance
- CQS≥95, CRI≥96, TLCI≥96
- Flicker-free performance
- Extreme temperature performance even under -20°C
- Controls: DMX, CRMX, Ethernet (sACN and ArtNet protocol), Bluetooth app control, on-board
- Bowens Mount

What's in the Box



Light Body	×1	Yoke	×1
Reflector BR45	×1	Light Protection Cover	×1
AC Power Cord	×1	DC Cable	×1
Safety Wire	×1	Pipe Clamp	×1
Controller	×1	Soft Case SC20	×1
Tying Rope	×1		



POWER
650_w
650W output

IP54
Weatherproof

☀
2800K-6500K

📶
CRMX/DMX/
Ethernet/Bluetooth

M600Bi Pro

- CCT: 2800K - 6500K
- IP54 weather resistance
- Smoother, more linear dimming
- Pairs seamlessly with the B60 for parallel beams
- Controls: DMX, CRMX, Ethernet, Bluetooth, and on-board control
- exceptional durability and reliability
- Precise 0.1% dimming control
- 11 Build-in FX effects
- CRI of 97 and TLCI of 98
- Bowens mount for wide compatibility

M600Bi Pro



Light Body	×1
Controller	×1
Protection Cover	×1
U-type Bracket	×1
Reflector BR30	×1
Tying Rope	×1
Safety Rope	×1
DC Power Cord	×1
AC PowerCord	×1
Controller Mounting Device	×1

M600Bi Pro K1



Light Body	×1
Controller	×1
Protection Cover	×1
U-type Bracket	×1
Reflector Br30	×1
Tying Rope	×1
Storage Bag	×1
Safety Rope	×1
DC Power Cord	×1
AC PowerCord	×1
Controller Mounting Device	×1

Full Color LED Light | M300R



R 3450Lux
G 7270Lux
B 2070Lux
@1m(Bare Light)



Full-Color
Capability

GM

Green/Magenta
Adjustable

IP65

Weatherproof



Built-in CRMX

M300R

- Full-color COB light with high brightness of color
- Multiple modes including CCT, HSI, RGBW, GEL, XY and FX
- GM adjustable
- AC and V-mount battery power supply
- IP65 weather resistance
- CRMX/DMX/APP/On-board control
- Bowens Mount Compatibility
- KNOWLED professional standard ensures high color accuracy
- Lightweight(3.6kg) and robust body built in magnesium aluminum alloy

Bowens Mount Accessory Ecosystem for M1000R/M600R/M600Bi Pro/M300R

Reflector




BR30
30° Reflector



BR45
45° Reflector



BF10
Fresnel



LB-02
Barndoor for BF10

BeamLight



B60
BeamLight Reflector

Softbox



SB-FW-95/120/140
Octa Softbox



SB-FW-6060/9090/6090/
70100/50130/35160
Rectangular Softbox



QR-P70/90/120/
60T/70T/90T/120T/150T
Quick Release Parabolic Softbox



P90L/90H/120L/120H
Parabolic Softbox



CS-50D/65D/85D/
50T/65T/85T
Lantern Softbox



UL Series
Quick Release Umbrella
Softbox

Projection Attachment



BPK
Projection Attachment




Lens 19°




Lens 26°




Lens 36°



Gobo Set VSA-GS1



Gobo Set VSA-GS2



Gobo Set VSA-GS3



Gobo Set VSA-GS4



CB38
Lens Portabe Bag



VSA-ID
Iris Diaphragm



Compact Design



Versatile Power Supply



Godox Optical Ecosystem



CRMX Control



Godox Magnetic Mount

MS60R/Bi

- All-new Godox magnetic mount
- Lightweight Body (311g)
- High-saturation & Full color
- Multiple Modes: CCT, HSI, RGBW, X-Y, FX
- CCT range from 1800K to 10000K(MS60R)
- 60W Power Supply
- Paired with the SZL2 zoom lens, compatible with S60Bi optical accessories
- Seamless Integration with Godox Optical Ecosystem
- Removable fast-charging battery and GaN power adapter
- Power Options: AC,DC 48V, USB-C ,NPF battery, V-mount batteries
- Powered via E27 socket, seamlessly blending into scenes as downlights, spotlights, or stage lights
- DMX512 Control/LumenRadio CRMX/Ethernet/Bluetooth app Control

Full/Bi Color LED Light | MS60R/Bi



SPECS

Model	MS60Bi	MS60R
Lithium Battery Parameters	DC14.4V, 3400mAh, 48.96Wh USB-C Input: 5V=3A, 9V=3A, 12V=2.5A, 20V=1.5A	DC14.4V, 3400mAh, 48.96Wh USB-C Input: 5V=3A, 9V=3A, 12V=2.5A, 20V=1.5A
Light Body USB-C Port Input	20V=3A Max 60W	20V=3A Max 60W
CCT	2800K-6500K	1800K-10000K
Brightness Range	0%-100%	0%-100%
Dimming Curves	linear, S-curve, exponential, logarithmic	linear, S-curve, exponential, logarithmic
FX Mode	11	14
CRI	Average≥97	Average≥95
TLCI	Average≥98	Average≥95
Controlling Methods	DMX 512 controller, support RDM protocol/ LumenRadio CRMX Bluetooth app control	DMX 512 controller, support RDM protocol/ LumenRadio CRMX Bluetooth app control
Bluetooth Controlling Distance	60m	60m
Working Environment Temperature	-20°C~40°C	-20°C~40°C
Dimension	≈3.03*3.03*3.58"	≈3.03*3.03*3.58"
(without lens reflector and battery)		
Netweight	≈303g	≈311g
(without lens reflector and battery)		

Full/Bi Color LED Light | MS60R/Bi

MS60R/Bi




Optional Purchase

MS60R/Bi 1K(1 Light Kit)



MS60R/Bi 2K(2 Lights Kit)

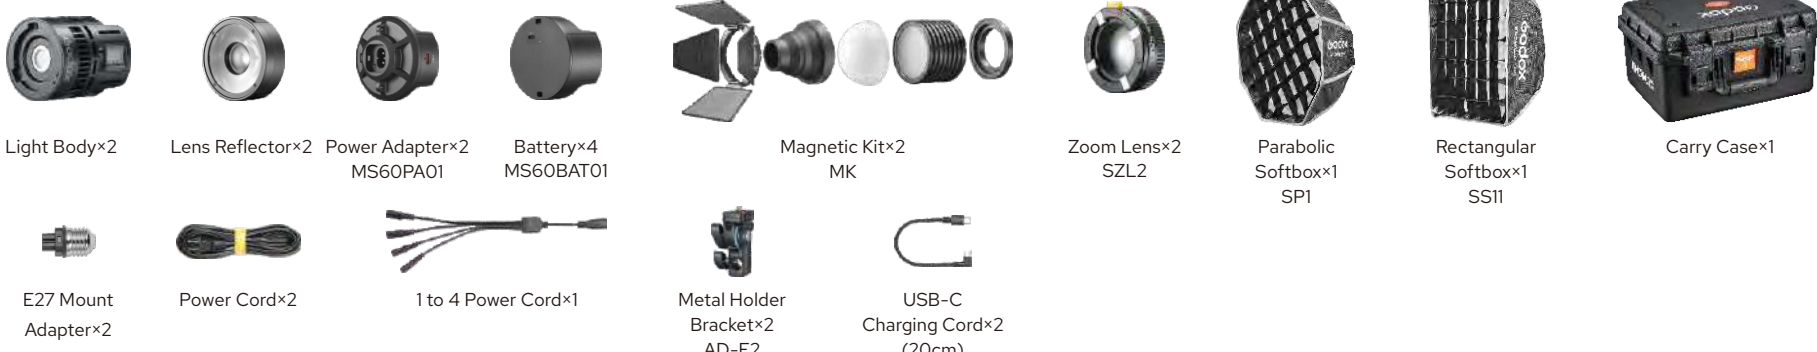

MS60R/Bi 4K(4 Lights Kit)Main Kit



Full/Bi Color LED Light | MS60R/Bi

MS60R/Bi 4K(4 Lights Kit)Accessories Kit



Optional Accessories





PANEL LIGHTS



SPECS

Model	P600R Hard P4/P1200R Hard P8	P600R Hard PRO/P1200R Hard PRO	P600R Hard/P1200R Hard	P300R/P600R	P600Bi Hard
Luminance	9,230Lux/20,000Lux @3m (5600K)	11,200Lux/16,245Lux @3m (5600K)	8,980Lux /17,100Lux @3m (5600K)	1,620Lux/3,230Lux @3m (5600K)	11,400Lux @3m (5600K)
Color Version	Full-color	Full-color	Full-color	Full-color	Bi-color
CCT	1800K-10000K	1800K-10000K	1800K-10000K	1800K-10000K	2800K-6500K
Max. Power	700W/1400W	670W/1300W	700W/1500W	350W/700W	650W
Color Rending	CRI≥97 TLCI≈98 TM-30 RF≈95	CRI≥96/ TLCI≥98	CQS≥95/CRI≥96/ TLCI≥96	CQS≥95/CRI≥96/ TLCI≥96	CQS≥93/CRI≥96/ TLCI≥96
Controls	CRMX/DMX/Ethernet/App/On-board	CRMX/DMX/App/On-board	CRMX/DMX/App/On-board	CRMX/DMX/Ethernet/App/On-board	CRMX/DMX/App/On-board/Remoter
Power Supply	AC	AC	AC	AC/DC 48V	AC
Dimension(Yoke included)	431*151*385mm/737*151*385mm	433*386*166mm/743*386*166mm	496*570*119mm/834*606*170mm	563*498*155mm/776*567*153mm	571*499*121mm
Weight	11kg/17.6kg	13kg/22kg	11.22kg/18.5kg	11.6kg/17.8kg	10kg



4/8 Pixel Zones



Adjustable Diffusion



Full-Color Lighting
at Scale

IP65

IP65 Weather
Resistance

P600R Hard P4/P1200R Hard P8

- Soft yet powerful illuminance for large-scale lighting
- 161,000Lux 5600K@1m, with a 55° beam angle
- Built-in 4 pixel zones/8 pixel zones
- A new adjustable diffusion system. Hard to soft in one second.
- Perfect skin tone and true-to-life color reproduction
- CRI R9=92
- CRI=97,TLCI=98, TM30 RF=95
- GM adjustment from -100% to 100%
- CCT range from 1,800K to 10,000K
- Compatible with panel light accessory system


LED Light Panel | P600R Hard P4/P1200R Hard P8



Adjustable Diffusion



Perfect Skin Tone

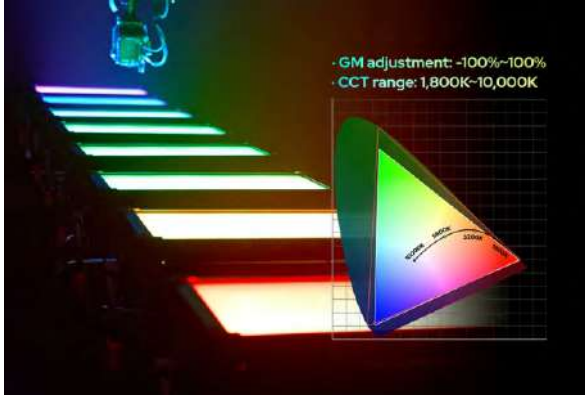

Rich Colors

LED Light Panel | P600R Hard P4/P1200R Hard P8



P600R Hard P4

Light Body	×1
Yoke	×1


AC Power Cord	×1
Safety Cable	×1



P600R Hard P4 K1

Light Body	×1
Yoke	×1
AC Power Cord	×1

Safety Cable	×1
Storage Case	×1



P1200R Hard P8

Light Body	×1
Yoke	×1

AC Power Cord	×1
Safety Cable	×1



P1200R Hard P8 K1

Light Body	×1
Yoke	×1
AC Power Cord	×1

Safety Cable	×1
Storage Case	×1



POWER
1300W
High Brightness
(2x1 panel)



Full Color

IP65

Weatherproof



CRMX Built-In



Hard or Diffused



Support High Frame
Rate Filming

P600R Hard PRO/1200R Hard PRO

- 1300W in a compact 2x1 panel—unmatched punch in this form factor
- Full-color control
- Wide native beam angle of 50°~55° for large-area coverage
- IP65-rated for all-weather reliability
- High color accuracy: CRI 96+, TLCI 98+
- 1,800K-10,000K CCT range with G/M adjustment
- Flicker-free at high frame rates
- Built-in CRMX, DMX, Bluetooth and on-board control
- Compatible with a full range of accessories
- Quick-fit design for faster mounting and setup
- Custom dual/triple brackets for multi-light rigs
- Integrated PSU for cleaner setups and easier rigging



LED Light Panel | P600R Hard PRO/P1200R Hard PRO



Light Up Big Scenes with Ease



Full-Color Brilliance, Ideal for Creative Washes



Ready for Any Condition

LED Light Panel | P600R Hard PRO/P1200R Hard PRO



P600R Hard PRO

Light Body
U-bracket

×1
×1

AC Power Cord
Safety Rope

×1
×1



P600R Hard PRO K1

Light Body
U-bracket
AC Power Cord

×1
×1
×1

Safety Rope
Carry Case

×1
×1



P1200R Hard PRO

Light Body
U-bracket

×1
×1

AC Power Cord
Safety Rope

×1
×1



P1200R Hard PRO K1

Light Body
U-bracket
AC Power Cord

×1
×1
×1

Safety Rope
Carry Case

×1
×1

Softbox



P1200RHDø
Domed Diffuser



P1200RHSS
Space Light Softbox



P1200RHS23
Rectangular Softbox

Others



SCH03
Sling Chain

Compatible with certain accessories of P600R when using Adapter P1200RH AD




P1200RH AD
Adapter


+



P600RS34
Rectangular Softbox



P600RO5
Octa Softbox



P600RB4
Barndoor



P600RH30
Honeycomb



P600RD
Diffusion



P1200RHDB
Adjustable Diffuser
(For P1200R Hard P8)


Bracket for P1200 Hard P8/Pro



AB02-3
2-lights Bracket



AB03-3
3-lights Bracket

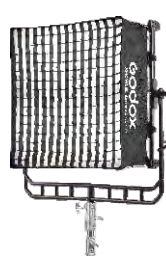


P1200RHPS22
2-Lights Rectangular
Softbox




P1200RHPS32
3-Lights Rectangular
Softbox


Bracket for P1200 Hard

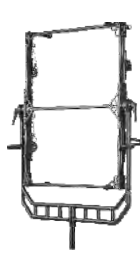

AB02-2
2-lights Bracket

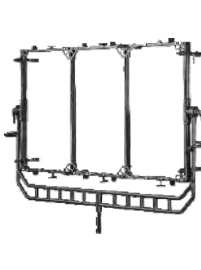

AB03-2
3-lights Bracket

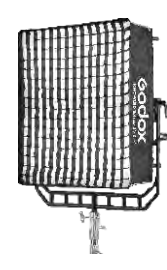

P1200RHS22
2-Lights Rectangular
Softbox



P1200RHS32
3-Lights Rectangular
Softbox

Softbox



P600RHDø
Domed Diffuser



P600BHSS
Space Light Softbox




P600BHS22
Rectangular Softbox(24"x24")


Others



SCH01
Sling Chain



HJ02
Junior Offset Arm



HJ04
Junior Multi-Header

Compatible with certain accessories of P300R when using Adapter P600RH AD




P600RH AD
Adapter


+




P300RS33
Rectangular Softbox



P300RO4
Octa Softbox



P300RB4
Barndoor



P300RH30
Honeycomb




P300RD
Diffusion




P600RHDB
Adjustable Diffuser
(For P600R Hard P4)

Bracket for P600 Hard P4/Pro

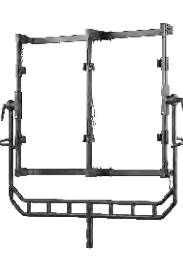


AB04-3
4-lights Bracket

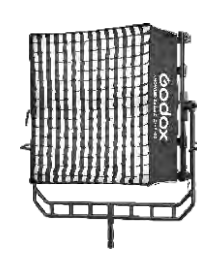


P600RHPS22
4-Lights Softbox

Bracket for P600 Hard

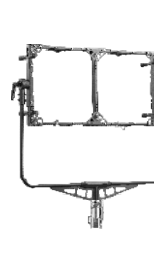


AB02
2-lights Bracket

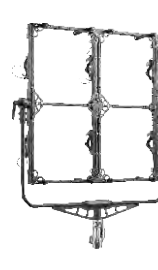

AB04
4-lights Bracket



AB02S23
2-lights Softbox

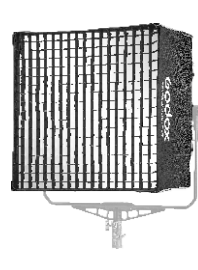

AB04S33
4-lights Softbox



Full-Color
Capability



Super Brightness



High Color
Consistency



Compact and
Lightweight



Hard/Soft
Switching



Stable CRMX
Control

P600R Hard/P1200R Hard

- CCT: 1800K-10000K
- Full-color capability
- Super power in compact size:
P600R Hard: 650W 1×1 panel
P1200R Hard: 1200W 2×1 panel
- CQS≥95, CRI≥96, TLCI≥96
- Controls: DMX, CRMX, App, and on-board control
- Hard/soft switching with diffusion panels
- Precisely designed optical lens
- High efficient heat dissipation

LED Light Panel | P600R Hard/P1200R Hard




P600R Hard

Light Body	×1	Main Cable	×1
Metal Spacer	×2	Safety Wire	×1
Direction Adjusting Handle	×1	Screw	×1
Yoke	×1	HexWrench	×1
Plastic Spacer	×2		

P1200R Hard

Light Body	×1	Main Cable	×1
Metal Spacer	×2	Safety Wire	×1
Direction Adjusting Handle	×1		
Yoke	×1		
Plastic Spacer	×2		



Optional Purchase for P600R Hard

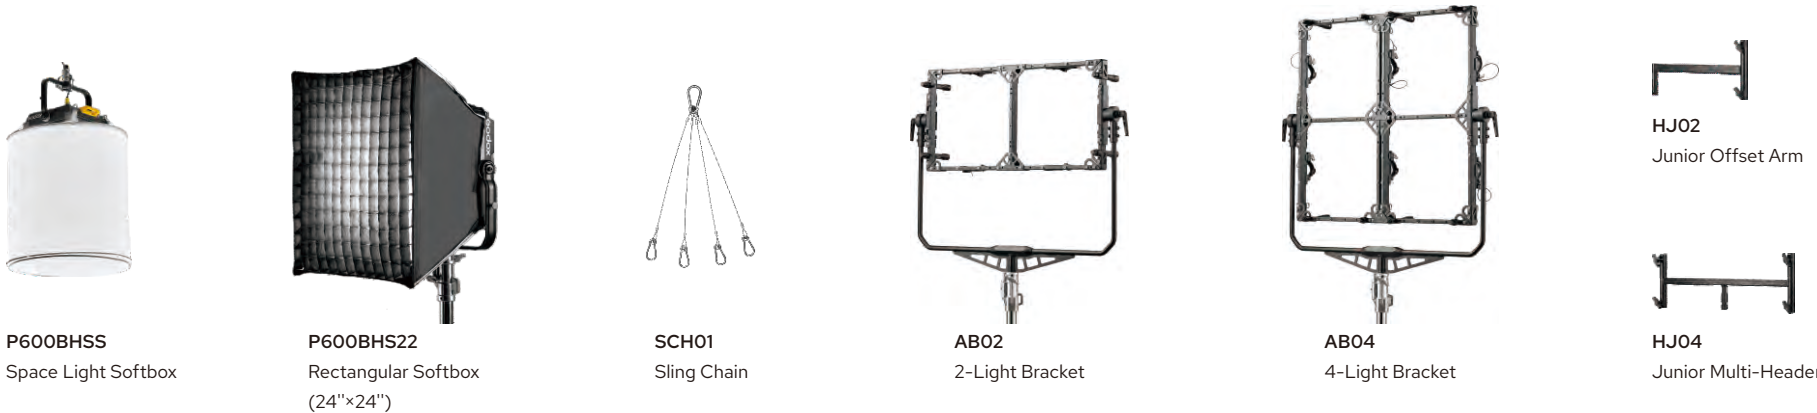

LED Light Panel | P600R Hard/P1200R Hard



Optional Purchase for P1200R

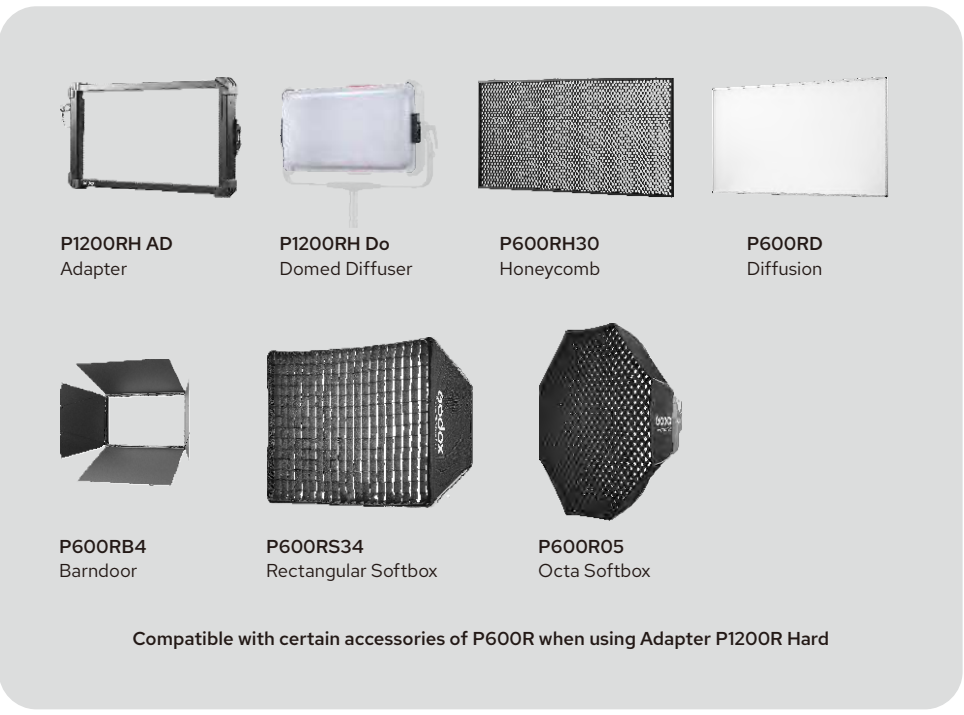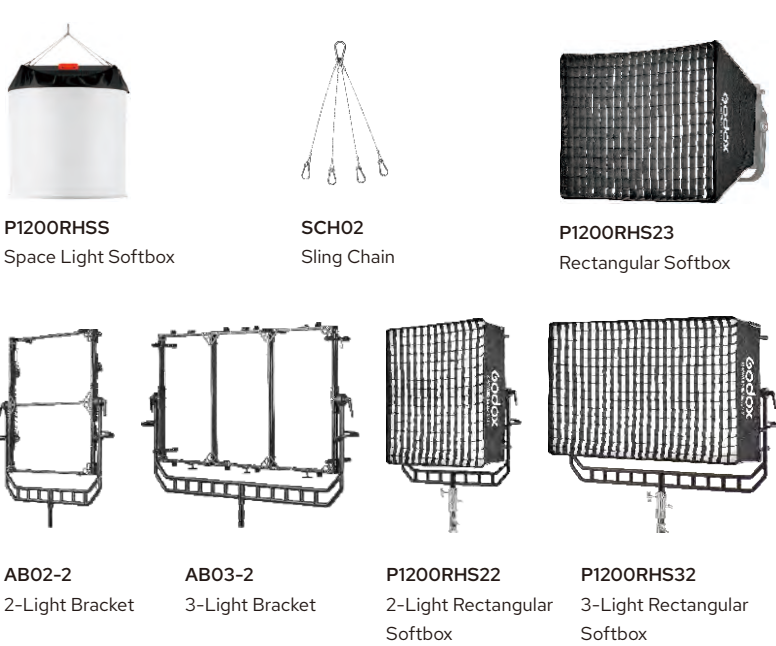



4/8 Pixels



Color Consistency
Across Units



4 Color Modes



Optional Color
Spaces



DMX/CRMX



Godox KNOWLED
App Control

P300R/P600R

- Full-color capability
- CCT: 1800K-10000K
- Ideal for virtual production applications
- Compact size with higher pixel density in 1x1 ft (4 pixels) and 1x2 ft (8 pixels) options
- Godox's color calibration ensures consistent hues across all units from KNOWLED series
- Color spaces including Rec.2020, DCI-P3, and Rec.709
- High brightness with soft light quality
- Flicker-free performance
- CQS≥95, CRI≥96, TLCI≥96
- High-efficiency cooling fan for sustained performance
- Controls: DMX, CRMX, Ethernet, Bluetooth app control, on-board control
- Diverse accessory options available

LED Light Panel | P300R/P600R



P300R	
Light Body	×1
Typing Rope	×1
Safety Wire	×1
Main Cable	×1



P300R K1 Kit	
Light Body	×1
Typing Rope	×1
Safety Wire	×1
Main Cable	×1
Quick Setup Softbox	×1
Soft Case SC02	×1



P600R	
Light Body	×1
Typing Rope	×1
Safety Wire	×1
Main Cable	×1



P600R K1 Kit	
Light Body	×1
Typing Rope	×1
Safety Wire	×1
Main Cable	×1
Quick Setup Softbox	×1
Soft Case SC04	×1

Optional Purchase for P300R



P300RH30	Safety Wire	P300RB4	P300R11G	P300RS33+P300RS33G	P300R04+P300R04G	AB02	AB04
Honeycomb 30°	SWO1	Barndoor	Grid(for Bare Light)	Softbox 3'x3'+Grid	Softbox Octa 4'+Grid	2-Light Bracket	4-Light Bracket



AB02S23	AB04S33	MC8B	P300RY02	P300RY03	P600BHSS	P600BHS22	SC02
Softbox (2'x3') for AB02	Softbox (3'x3') for AB04	Main Cable	P.O.Yoke	Double Vertical Yoke	Space Light Softbox	Rectangular Softbox (24"×24")	Soft Case

LED Light Panel | P300R/P600R

Optional Purchase for P600R



P600RH30	P600RB4	P600RS23+P600RS23G	P600RS34+P600RS34G	P600R05+P600R05G
Honeycomb 30°	Barndoor	Softbox 2'x3'+Grid	Softbox 3'x4'+Grid	Softbox Octa 5'+Grid



P600RY02	P600RY03	SC04	Safety Wire	MC8B	Grid(for Bare Light)
P.O.Yoke	Double Vertical Yoke	Soft Case	SWO1	Main Cable	P600R12G



POWER
650_w
Power 650W

2800K-6500K

93,800Lux at 1 meter

LumenRadio CRMX

10_{KG}
Lightweight 10KG

P600Bi Hard

- CCT: 2800K-6500K
- 650W full output across all color temperatures
- A 10kg 1x1 panel
- 93,800Lux at 1 meter
- Precisely designed optical lens
- CRI≥96, TLCI≥96
- 0.1% stepless adjustment from 0.1% to full power
- Controls: DMX & CRMX, App control, 2.4GHz remote, on-board
- Aerospace-grade heat dissipation



Combined use as key light



Interior lighting




Green screen lighting solution



P600Bi Hard

- Light Body ×1
- Tying Rope ×1
- Safety Rope ×1
- Hex Wrench ×1
- U-type Bracket ×1
- Antenna ×1
- AC Power Cable ×1

Optional Purchase

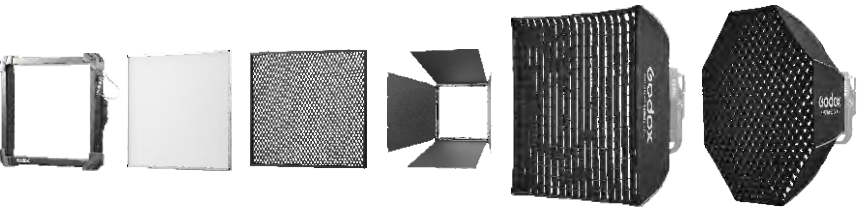

- P600RH AD Adapter
- P300RD Diffusion
- P300RH30 Honeycomb
- P300RB4 Barndoor
- P300RS33 Rectangular Softbox
- P300R04 Octa Softbox

Compatible with certain accessories of P300R when using Adapter P600RH AD

Optional Purchase



Space Light Softbox P600BHSS



Rectangular Softbox (24"×24") P600BHS22



2-light Bracket AB02



4-light Bracket AB04



Junior Offset Arm HJ02




Junior Multi-header HJ04




Softbox (2'x3') for AB02 AB02S23



Softbox (3'x3') for AB02 AB04S33

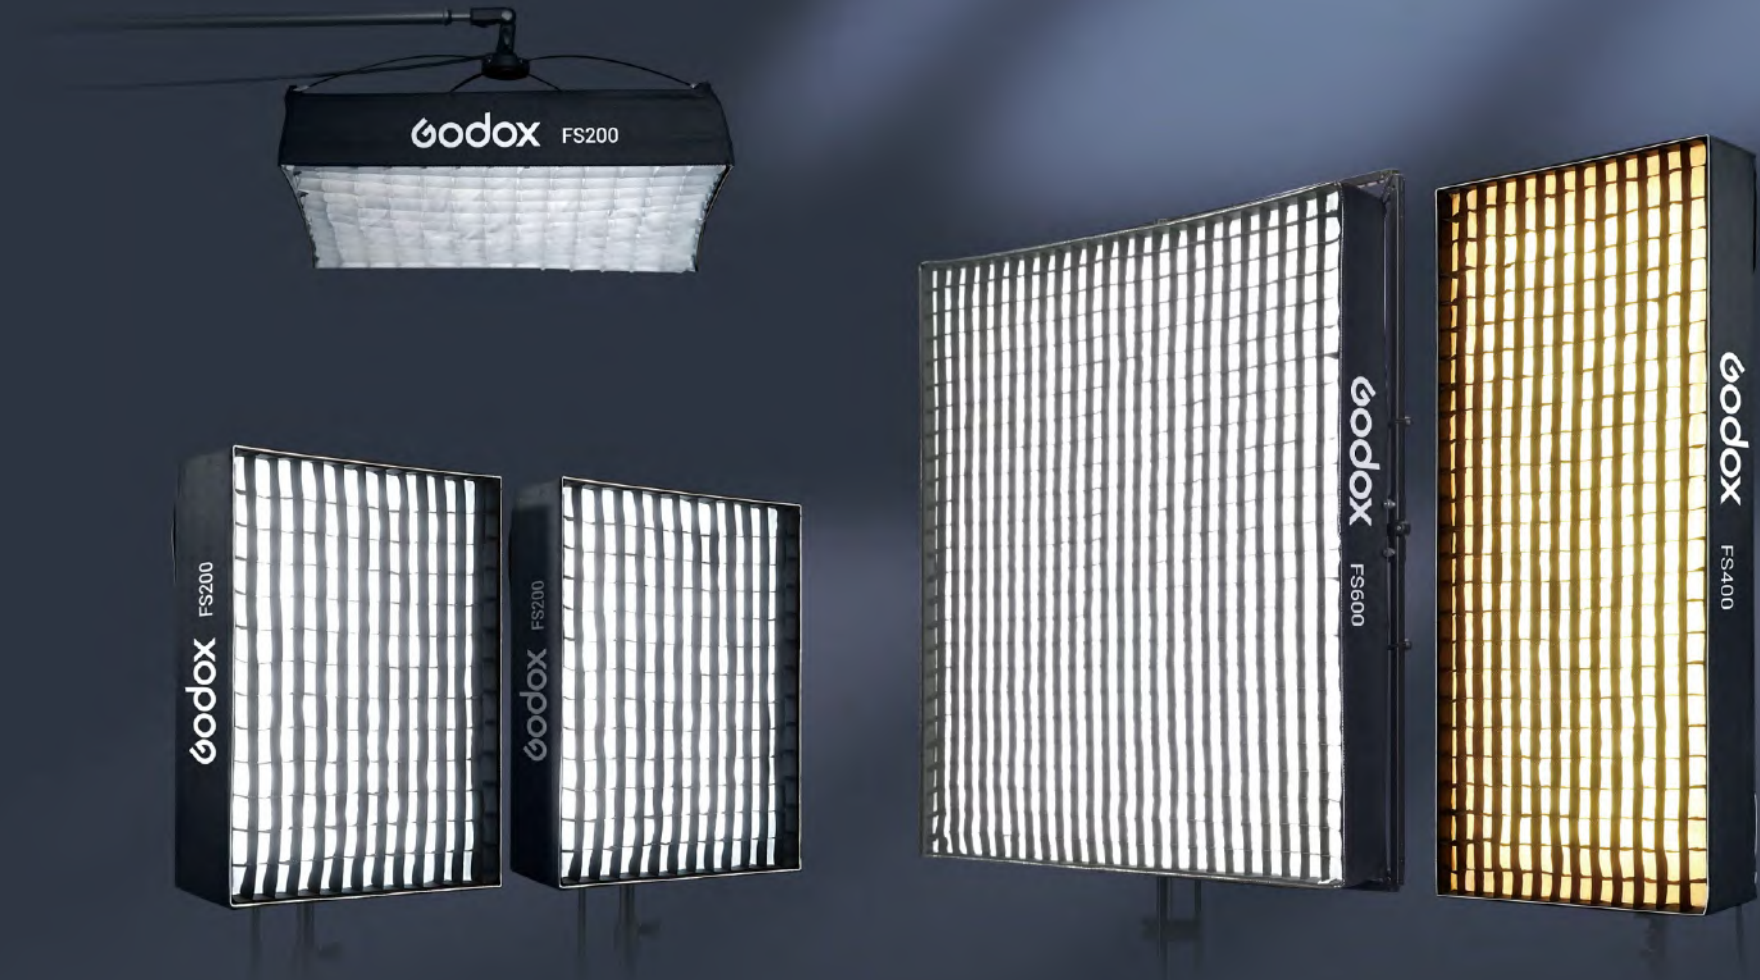


FLEXIBLE LED MAT

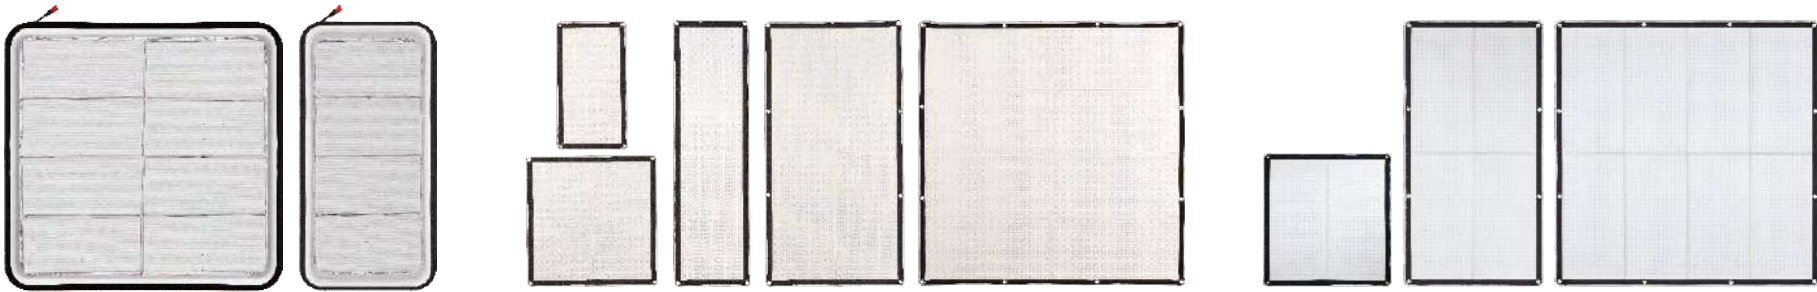

SPECS

Model	AM88R	AM48R	F100R	F200R	F200SR	F400R	F800R	F200Bi	F400Bi	F600Bi
Luminance	24,600Lux @1m(5600K)	24,600Lux @1m(5600K)	4,740Lux @1m(5600K)	8,900Lux @1m(5600K)	7,900Lux @1m(5600K)	14,400Lux @1m(5600K)	24,200Lux @1m(5600K)	1,130Lux @3m (5600K)	2,280Lux @3m (5600K)	3,240Lux @3m (5600K)
Color Version	Full-color	Full-color	Full-color	Full-color	Full-color	Full-color	Full-color	Bi-color	Bi-color	Bi-color
CCT	1800-10000K	1800-10000K	1800K-10000K	1800K-10000K	1800K-10000K	1800K-10000K	1800K-10000K	2700K-8500K	2700K-8500K	2700K-8500K
Max. Power	1800W	1800W	130W	250W	250W	460W	900W(Max.)	210W	410W	670W
Color Rending	CRI≥96/ TLCI≥97	CRI≥96/ TLCI≥97	CRI≥96/ TLCI≥98	CRI≥96/ TLCI≥98	CRI≥96/ TLCI≥98	CRI≥96/ TLCI≥97	CRI≥96/ TLCI≥97	CRI≥96/ TLCI≥96	CRI≥96/ TLCI≥96	CRI≥96/ TLCI≥96
Controlling Methods	DMX/LumenRadio CRMX/ Bluetooth app Control	DMX/LumenRadio CRMX/ Bluetooth app Control	DMX/LumenRadio CRMX/ Bluetooth app Control	DMX/LumenRadio CRMX/ Bluetooth app Control	DMX/LumenRadio CRMX/ Bluetooth app Control	DMX/LumenRadio CRMX/ Bluetooth app Control	DMX/LumenRadio CRMX/ Bluetooth app Control	DMX/App/On-board/Remoter/ Bluetooth app Control	DMX/App/On-board/Remoter/ Bluetooth app Control	DMX/App/On-board/Remoter/ Bluetooth app Control
Power Supply	100V-240V~50/60Hz	100V-240V~50/60Hz	100V-240V~50/60Hz	100V-240V~50/60Hz	100V-240V~50/60Hz	100V-240V~50/60Hz	100V-240V~50/60Hz	AC/DC 48V/ V-mount battery	AC/DC 48V/ V-mount battery	AC/DC 48V/ V-mount battery
G/M Adjust	-100%~100%	-100%~100%	-100%~100%	-100%~100%	-100%~100%	-100%~100%	-100%~100%			
Protection Grade of	IP54	IP54	IP54	IP54	IP54	IP54	IP54	IP65	IP65	IP65
Light Body/Controller										
Dimension±	Bare Light Body AM88R: 2,300*2,300mm	Bare Light Body AM48R: 2,300*1,100mm	Bare Light Body: 344*636mm	Bare Light Body: 637*637mm	Bare Light Body: 344*1220mm	Bare Light Body: 637*1221mm	Bare Light Body: 1221*1221mm	650*631*29mm	1209*627*23mm	1210*1210*24mm
	Controller AM1600R: 270*220*370mm		Controller: 154*128*232mm	Controller: 154*128*232mm	Controller: 154*128*232mm	Controller: 208*161*322mm	Controller: 190*166*366mm	124*132*270mm	124*132*270mm	179*123*332mm
Netweight±	Bare Light Body AM88R:12kg	Bare Light Body AM48R:6. 7kg	Bare Light Body: 0.6kg	Bare Light Body: 1kg	Bare Light Body: 1. 05kg	Bare Light Body: 1. 8kg	Bare Light Body: 3kg	1.83kg	3.1kg	3.8kg
	Controller AM1600R:11kg		Controller: 2.8kg	Controller: 2.8kg	Controller: 2.8kg	Controller: 5.8kg	Controller: 6.5kg	2.77kg	3.07kg	3.9kg

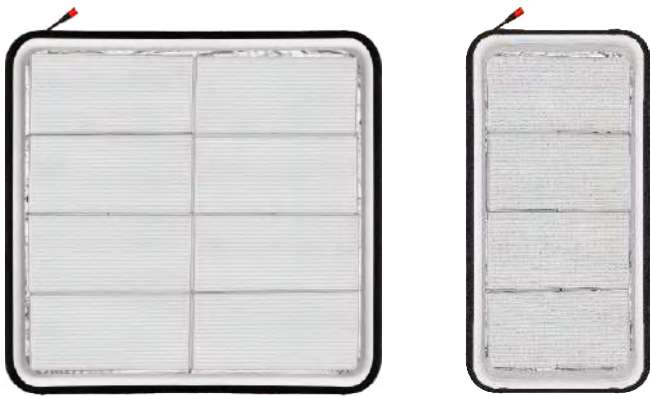

Full-color

1600w

1600W
High Output



Reinvented Butterfly
Airframe



Exceptional
Airtightness



Universal
Controller




Attachable
Diffusers

AM1600R

- 1600W full-color power for large-scale lighting
- Available in 4'x8' and 8'x8' sizes
- Inflates to 8psi in 3 minutes
- No truss needed – 15days without reinflation
- Modular design for connecting or swapping freely
- Versatile detachable accessories: pancake, grids and more
- Repair kit for efficient, cost-effective maintenance
- GM/CCT/HSI/RGBW/GEL/FX adjustment
- CRI≈96/TLCI≈97
- IP54-rated for outdoor use
- CRMX/DMX/App/On-board control



Full-Color Flexible LED Mat | AM1600R

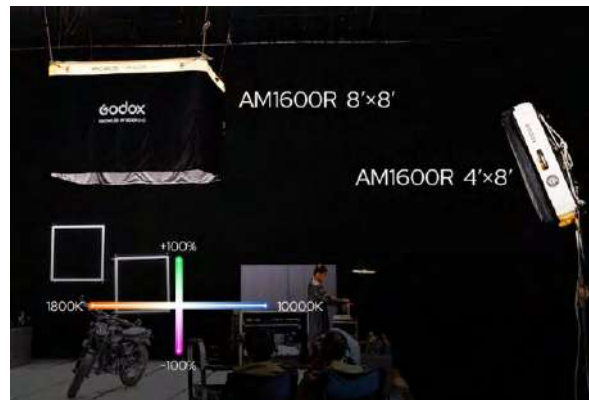

Two Size Available



Rigging without truss



8Psi inflation in 3mins for 15 days

Full-Color Flexible LED Mat | AM1600R

AM1600R 48K



Light Body AM48R×1



Inflatable Butterfly Frame AF48K×1



Skirt AF48S×1



Grid AF48G×1



Pancake Lantern AP48×1



Controller AM1600R×1



Air Pump×1



Repair Kit×1



Controller Mounting Device×1



Diffuser Fabric AM1600R 4'x8' D13-30×1



Diffuser Fabric AM1600R 4'x8' D11-32×1



DC Power Cord×1



AC Power Cord×1



Straps×2



Safety Ropes×4



Optical Accessories Kit×1



Flight Case×1

AM1600R 88K



Light Body AM88R×1



Inflatable Butterfly Frame AF88K×1



Skirt AF88S×1



Grid AF88G×1



Pancake Lantern AP88×1



Controller AM1600R×1



Air Pump×1



Repair Kit×1



Controller Mounting Device×1



Diffuser Fabric AM1600R 8'x8' D13-30×1



Diffuser Fabric AM1600R 8'x8' D11-32×1



Soft Film×1



DC Power Cord×1



AC Power Cord×1



Straps×2





Safety Ropes×4



Optical Accessories Kit×1



Flight Case×1

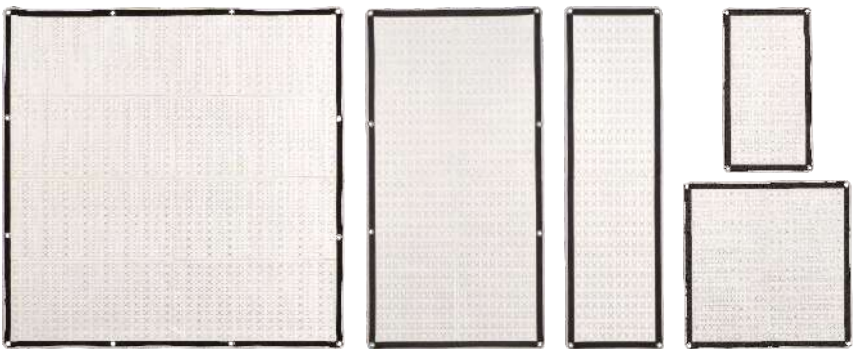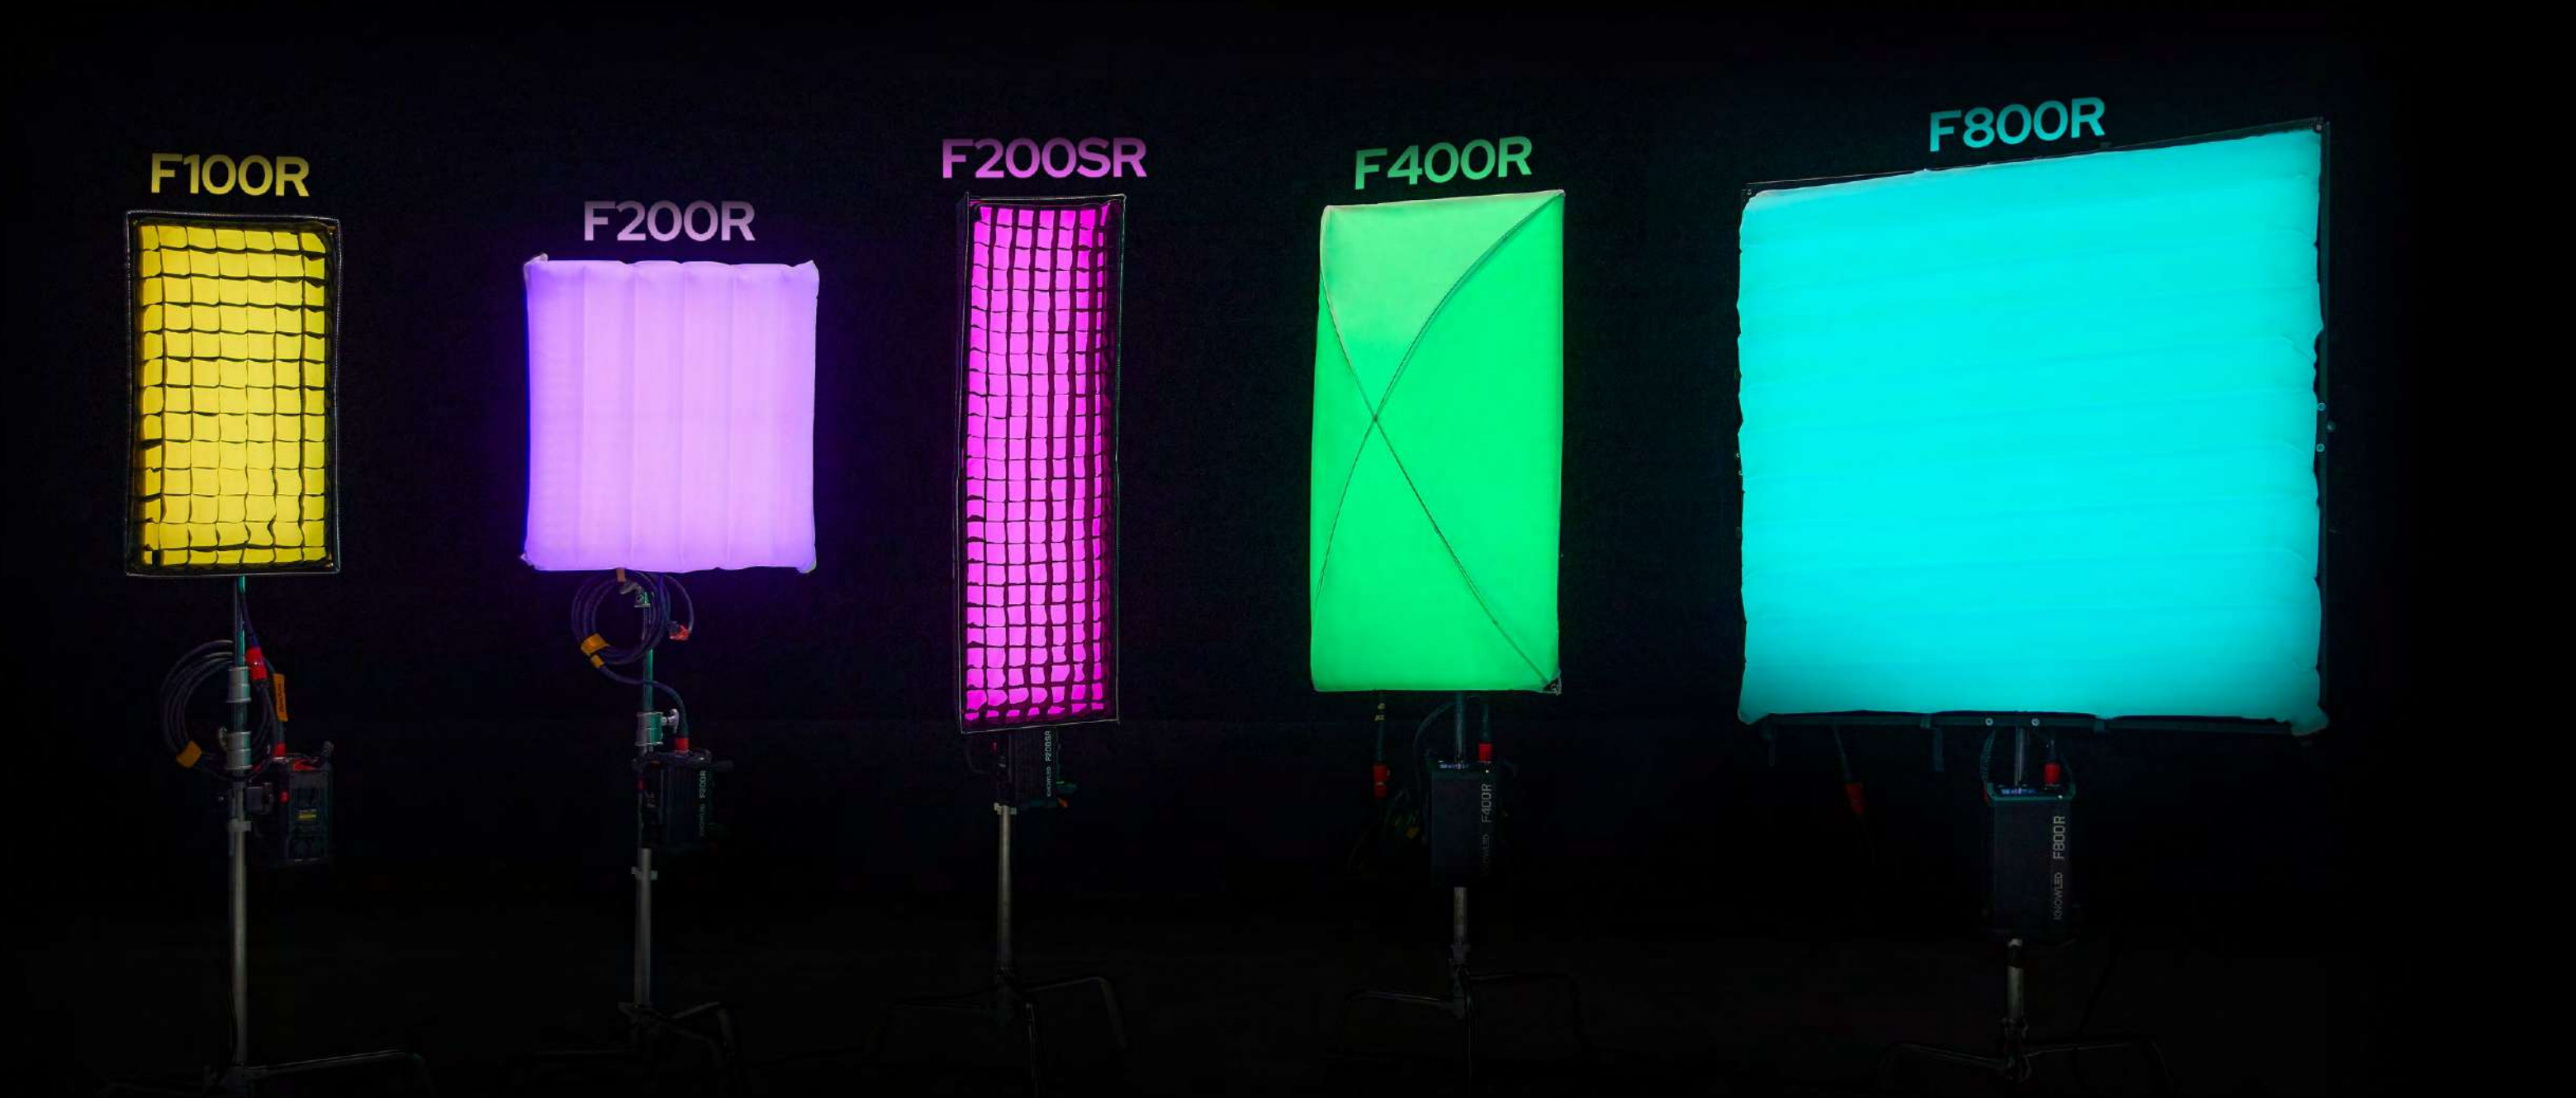

F100R/200R/200SR/400R/800R

- Full-Color Brightness for Every Scene
- Five Sizes: 1'x2'2'x2'1'x4'2'x4'x4'
- Light mats in 100W, 200W, 400W, 800W Options
- Compact and flexible for tight spaces
- High power in a slim design
- Light head IP54, control box IP54
- CCT range from 1800K to 10000K, adjustable G/M
- New air softbox available for each size
- Enhanced frame stability, high-quality softbox, QUICK installation
- CRI96+, TLCI 97+
- DMX512 Control/LumenRadio CRMX/Ethernet/Bluetooth app Control
- Power Options: AC,DC 48V, V-mount batteries



Space-Constrained Solution



Soft Light Film Set



Rainy Day Shooting

Full-Color Flexible LED Mat | F100R/200R/200SR/400R/800R



F100R K1

Light Body	×1	X Bracket	×1
DC Connection Cable	×1	Light Stand Mounting Adapter	×1
Softbox FS100	×1	Controller	×1
AC Power Cable	×1	Carrying Bag	×1



F200R K1

Light Body	×1	X Bracket	×1
DC Connection Cable	×1	Light Stand Mounting Adapter	×1
Softbox FS200	×1	Controller	×1
AC Power Cable	×1	Carrying Bag	×1



F200SR K1


Light Body	×1	X Bracket	×1
DC Connection Cable	×1	Light Stand Mounting Adapter	×1
Softbox FS200S	×1	Controller	×1
AC Power Cable	×1	Carrying Bag	×1



F400R K1

Light Body	×1	Light Stand Mounting Adapter	×1
DC Connection Cable	×1	Controller	×1
Softbox FS400	×1	Carrying Bag	×1
AC Power Cable	×1	Protective Cloth	×1
X Bracket	×1		

Full-Color Flexible LED Mat | F100R/200R/200SR/400R/800R

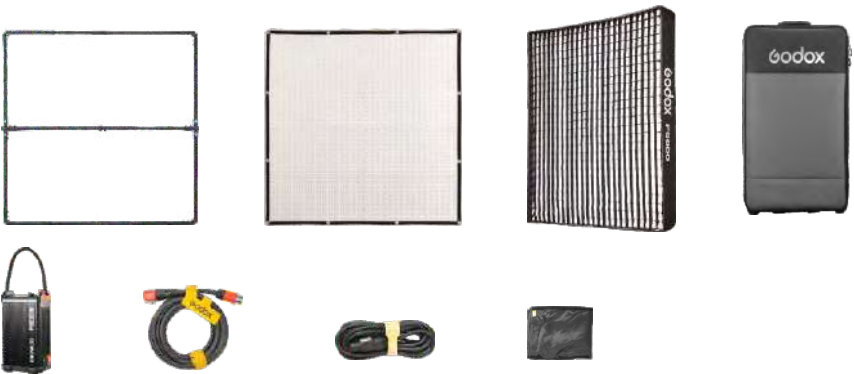

F800R K1

Light Body	×1	Metal Frame	×1
DC Connection Cable	×1	Protective Cloth	×1
Softbox FS800	×1	Controller	×1
AC Power Cable	×1	Carrying Case	×1

Optional Purchase



Air Softbox Kit

Air Softbox body×1 Grid×1 Skirt×1 Air Pump×1 Repair Patch×2
FA800 for F800R/FA400 for F400R
FA200S for F200SR/FA200 for F200R
FA100 for F100R



AT200

Air Tube×1 Skirt×1 Grid×1 Air Pump×1
Repair Patch×2 Fabric Handle×2
Connecting Holder×1 Velcro Hook Fastener×1



Pancake Lantern

FP600 for F800R
FP400 for F400R
FP200 for F200R



Skirt for K1 Softbox Kit

SS-FS800 for FS800/SS-FS400 for FS400
SS-FS200S for FS200S/SS-FS200 for FS200
SS-FS100 for FS100



5m DC Cable

F-DC5D for F200R/F200SR/F100R
F-DC5E for F400R/F800R



10m DC Cable


F-DC10E for F400R/F800R



Controller Clamp PC01



Adjustable Support Bracket BP01
For F800R

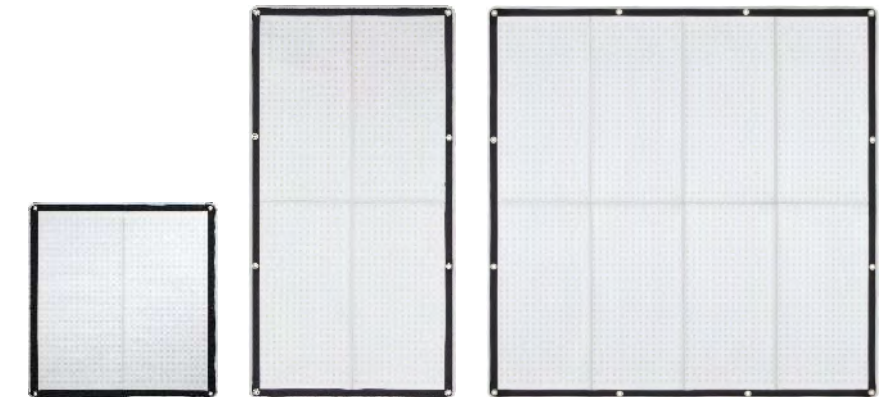

Foldable



Lightweight

IP65

Water-resistance



2700K-8500K

F200Bi/F400Bi/F600Bi

- CCT: 2700K-8500K
- Slim and flexible design suitable for use in narrow or curved spaces
- LED mats in 200W, 400W, 600W options
- Consistent full power output across all color temperatures
- CRI 96+, TLCI 96+
- Linear/S-Curve/Logarithmic/Exponential dimming curve
- Light body with a foldable design and IP65 water resistance
- High-quality aluminum alloy frame construction
- Easy to fold and transport
- Controls: DMX, App control, 2.4GHz remote, on-board
- CRMX support with optional TimoLink receiver (Sold Separately)
- Power options: AC, DC 48V, and V-mount batteries



F200Bi

Light Body	×1	5m Power Cable	×1
Control Box	×1	Adapter Holder	×1
X Bracket	×1	Softbox with Grid FS200	×1
3m Connect Cable	×1	Carry Bag CB87	×1



F400Bi

Light Body	×1	5m Power Cable	×1
Control Box	×1	Adapter Holder	×1
X Bracket	×1	Softbox with Grid FS400	×1
3m Connect Cable	×1	Carry Bag CB87	×1




F600Bi

Light Body	×1	Softbox with Grid FS600	×1
Control Box	×1	Carry Bag CB88	×1
3m Connect Cable	×1	Detachable metal frame MB-F600×1	
5m Power Cable	×1		

Optional Purchase



Pancake Lantern
FP200 for F200Bi
FP400 for F400Bi
FP600 for F600Bi



Flag Frame
FF200 for F200Bi



Remote Control
RC-R9II or RC-A6II



5m DC Cable
F-DC5A for F200Bi
F-DC5B for F400Bi
F-DC5C for F600Bi



Nano Clamp
L SA-03&LSA-19



Wireless DMX Transmitters
and Receivers
TimoL ink TX/TimoL ink RX



Hanging use for close-up shot




Indoor on-location lighting



Narrow-space lighting



TUBE LIGHTS

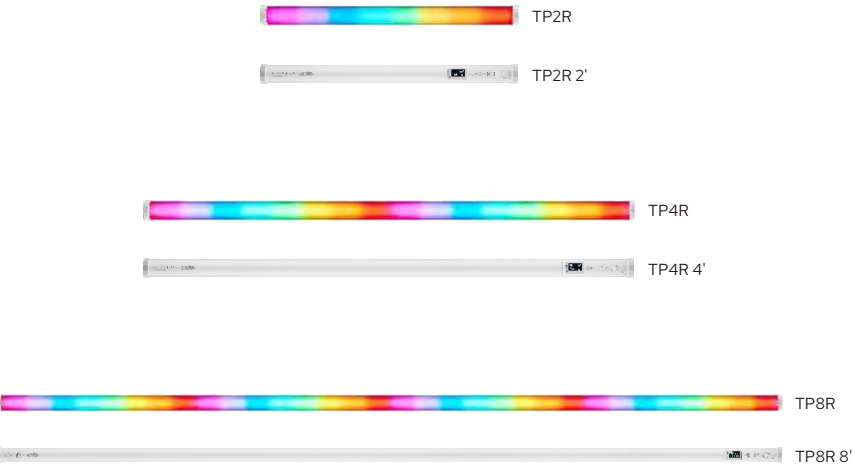

SPECS

Model	TP2R	TP4R	TP8R
Luminance	565Lux @1m (5600K)	765Lux @1m (5600K)	994Lux @1m (5600K)
Color Version	RGBWW	RGBWW	RGBWW
CCT	2000K-10000K	2000K-10000K	2000K-10000K
Pixels	16	32	64
Max. Power	26W	47W	83W
Color Rending	CRI≥96/TLCI≥97	CRI≥96/TLCI≥97	CRI≥96/TLCI≥97
Controls	CRMX/DMX/App/On-board/Remoter	CRMX/DMX/App/On-board/Remoter	CRMX/DMX/App/On-board/Remoter
Built-in Battery	Included	Included	Included
Power Supply	AC/built-in battery	AC/built-in battery	AC/built-in battery
Dimension	47*47*600mm	47*47*1200mm	47*47*2400mm
Weight	0.84kg	1.5kg	2.94kg



TP2R

TP2R 2'

TP4R

TP4R 4'

TP8R

TP8R 8'



High pixel
density



For Mapping Use



Lumen Radio
CRMX



180° Rotatable
Screen



2000K-10000K

TP2R/TP4R/TP8R

- High pixel density: 16(TP2R)/32(TP4R)/64(TP8R)
- Sizes: 2'(TP2R)/4'(TP4R)/8'(TP8R)
- CCT: 2000-10000K
- RGBWW capable
- CRI≥96, TLCI≥96
- Controls: DMX & CRMX, App control, 2.4GHz remote, on-board
- Selectable 8-bit & 16-bit modes
- 14 built-in FX effects
- 180° rotatable on-board screen for easy reading
- Excellent diffusion panel



RGBWW Pixel Tube Light | TP2R/TP4R/TP8R



Car scene lighting




Music video lighting



Pixel mapping

RGBWW Pixel Tube Light | TP2R/TP4R/TP8R

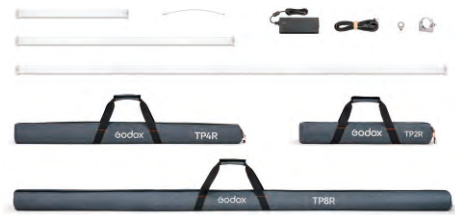


- TP2R**
Four-light Kit for TP2R
- 2' Pixel Tube light ×1
 - One for Two Adapter ×1
 - Power Cord ×1
 - Clip ×1
 - Bolt ×1
 - Steel Rope ×1
 - Carry Case CB76 ×1



- TP2R-K4**
Four-light Kit for TP2R
- 2' Pixel Tube light ×4
 - One for Two Adapter ×2
 - Power Cord ×2
 - Clip ×4
 - Bolt ×8
 - Steel Rope ×8
 - Carry Case CB76 ×1



- TP4R-K4**
Four-Light Kit for TP4R
- 4' Pixel Tube light ×4
 - One for Two Adapter ×2
 - Power Cord ×2
 - Clip ×8
 - Bolt ×8
 - Steel Rope ×8
 - Carry Case CB77 ×1

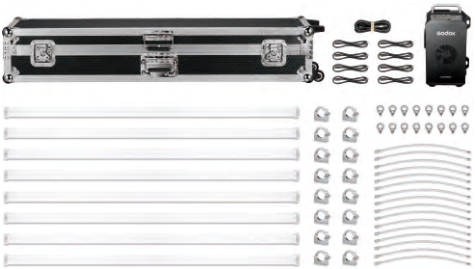

- TP8R-K8**
Eight-light Kit for TP8R
- 4' Pixel Tube Light ×8
 - Power Box ×1
 - Power Cord ×1
 - Clip ×16
 - Double Male Straight DC Cord ×8
 - Bolt ×16
 - Steel Rope ×16
 - Carry Case CB79 ×1

Optional Purchase



Two-light Bracket Kit
TP-B2(for TP2R/TP4R)



Four-light Bracket Kit
TP-B4 (for TP2R/TP4R)



Eight-light Bracket Kit
TP-B8 (for TP2R/TP4R)



Softbox TP-S2/TP-S4



Air Soft Tube
TP-S2A/TP-S4A



Power Box
TP-P600



Grid
TP-G2



Grid
TP-G4



Grid
TP-G8



Floor Stand
TP-FS60



Multi-tube Light
Connector TP-M2



DMX Adapter
Cable DMX-C1



TimoLink TX
Wireless DMX Transmitter



One for Two Adapter
TP-A2R/TP-A4R/TP-A8R



10m Power Cable
AC10A



5m DC Cable
TP-DC5



D-TAP to DC Male
Connector Cable DT-C1



SPECS

Model	AT200Bi
Power Supply	100V-240V~50/60Hz 2.1A
Max. Power	≈210W
CCT	2700-8500K
Brightness Range	0%-100%
Dimming Curves	linear, s-curve, exponential, logarithmic
FX Modes	11
CRI	Average≥96
TLCI	Average≥96
Waterproof Grade of Light Body	IP65
Controlling Methods	DMX 512 Control (support RDM protocol), 2.4GHz Wireless Control, Bluetooth APP Control
Bluetooth Controlling Distance	Max. 30m
2.4G Remote Control Distance	Max. 60m
Type-A USB Port	Firmware Upgrade/5V≈1A Power Supply
Dimension	Light Body: 280mm*267mm*1226mm/11"*11"*48" (With air bag and in the inflated state, does not include the connection cable.) Controller: 124mm*132mm*270mm
Netweight≈	Light Body: 2.15kg (Including airbag)/Controller: 2.8kg



180° Light Emission



200W Output



Multiple Controls



2700K-8500K



Detachable Design

AT200Bi

- CCT: 2700K-8500K
- LED mat with an inflatable softbox for soft, even lighting
- Handheld, suspended, or stand-mounted options
- Modular design for easy maintenance
- Multiple control options including DMX512, app control, and wireless remote
- Controls: DMX, App control, and wireless remote
- Maximum power of 210W
- High CRI and TLCI ratings above 96
- IP65 weather-resistant light body
- Sweeping 180° generous beam spread
- AC power and V-mount battery support
- Foldable, lightweight design
- 11 built-in FX lighting effects



AMBIENT LIGHTS



SPECS

Model	C5R	C7R	C10R
Luminance	200Lux @1m (6500K)	101Lux @1m (5500K)	130Lux @1m (5500K)
Color Version	RGBWW	RGBWW	RGBWW
CCT	2500K-8500K	2000K-10000K	2000K-10000K
Max. Power	5W	7W	10W
Color Rending	CRI≥96/TLCI≥96	CRI≥96/TLCI≥97	CRI≥96/TLCI≥97
Controls	On-board/App	On-board/App	On-board/App
Built-in Battery	Included	Included	Not included
Power Supply	5V/2A Type-C DC charging/ wireless charging/built-in battery	AC (lamp socket)/5V/ 2.5A Type-C DC charging/built-in battery	AC (lamp socket)/5V/ 3A Type-C DC charging
Dimension	106*68*18mm	73*73*136mm	73*73*136mm
Weight	169g	256g	236g



C5R

- Lightweight and portable
- CCT: 2500-8500K
- RGBWW capable
- CRI≥96, TLCI≥97
- Two independent dials for easy adjustment
- Magnetic back for easy attachment
- 39 FX effects for creative lighting
- Built-in 3000mAh lithium battery for 2-hours runtime at full output
- Wireless/Type-C charging
- Controls: Godox Light App, on-board
- Includes a collapsible diffuser
- Available in an 8-light charging kit



C7R/C10R

- Constant power design ensures stable lighting
- CCT: 2000-10000K
- Magenta-green adjustment.
- RGBWW capable
- Built-in battery for C7R
- CRI≥96, TLCI≥97
- Quick reset of bluetooth connection via on-board buttons
- Precise control via Godox Light App
- Power supply: AC/DC
- Available in E26 and E27 base options for versatile compatibility
- C7R available in an 8-light charging kit



RGBWW Creative Light/Bulb | C5R/C7R/C10R



Practical lighting



Ambient lighting



Colorful atmosphere

RGBWW Creative Light/Bulb | C5R/C7R/C10R

C5R



C5R-C8 Eight-light Charging Case for C5R




C5R-K8 Eight-light Charging Case Kit for C5R



C7R/C10R




Optional Purchase (for C7R/C10R)

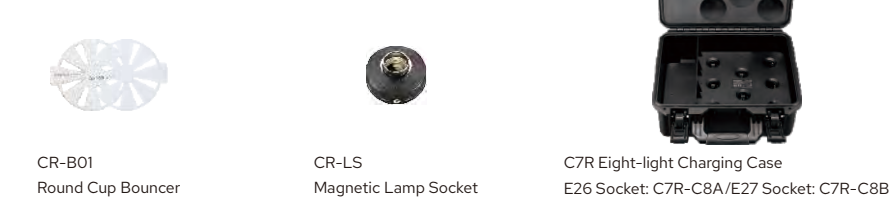

Eight-light Charging Case Kit for C7R



Eight-light Kit for C10R

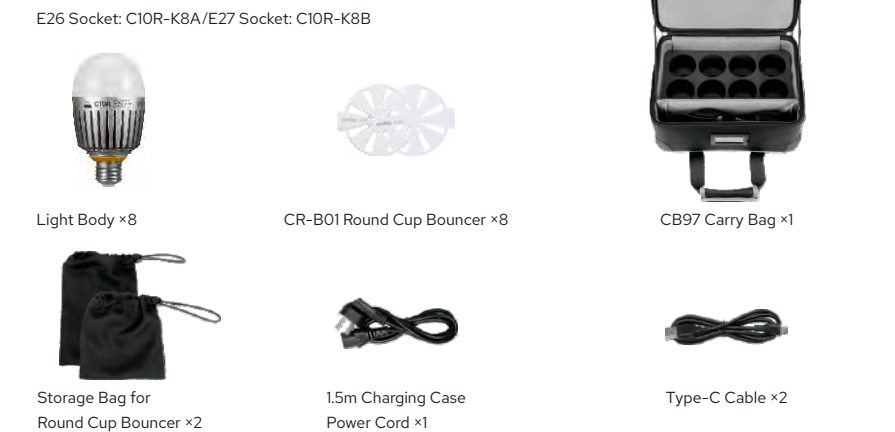

CINE LIGHTING REFLECTOR



High Reflectance



Four Diffusion Types



Varied Sizes



Versatile Applications



Comprehensive Accessories

LiteFlow 7/15/25/50/100

- Exceptional reflectance with a mere 3% power loss
- A variety of diffused lighting effects: D1/D2/D3/D4
- Five size options: 7×7/15×15/25×25/50×50/100×100 cm
- Sleek rail structure with a guide slot design, ensuring seamless installation
- Leveraging the square inverse law to extend the light path
- Effortless adjustments for convenient control
- Directly utilizing natural sunlight to balance lighting contrast, even without artificial sources
- Redirecting a single light source multiple times, reducing the need for additional fixtures and light-shaping tools
- Mimicking natural light decay, guaranteeing even lighting across the illuminated area
- Varying sizes grant you precise control over the illuminated area
- Coming with a comprehensive range of accessories



Cine Lighting Reflector | LiteFlow 7/15/25/50/100



Narrow space lighting



Utilizing sunlight outdoors



With high-output fixtures in low positions

Cine Lighting Reflector | LiteFlow 7/15/25/50/100

LiteFlow 7



LiteFlow 7D1×1



LiteFlow 7D2×1



LiteFlow 7D3×1



LiteFlow 7D4×1



Soft Case SC13×1

LiteFlow 15



LiteFlow 15D1×1



LiteFlow 15D2×1



LiteFlow 15D3×1



LiteFlow 15D4×1



Soft Case SC14×1

LiteFlow 25



LiteFlow 25D1×1



LiteFlow 25D2×1



LiteFlow 25D3×1



LiteFlow 25D4×1



Soft Case SC15×1

LiteFlow 50



LiteFlow 50D1×1



LiteFlow 50D2×1



LiteFlow 50D3×1



LiteFlow 50D4×1



Soft Case SC16×1

LiteFlow 100



LiteFlow 100D1&D3×1 Yoke×1



LiteFlow 100D2&D4×1 Yoke×1

LiteFlow 100 K1



LiteFlow 100D1&D3×1 Yoke×1





LiteFlow 100D2&D4×1 Yoke×1




Flight Case FC04×1


LiteFlow K1/K2

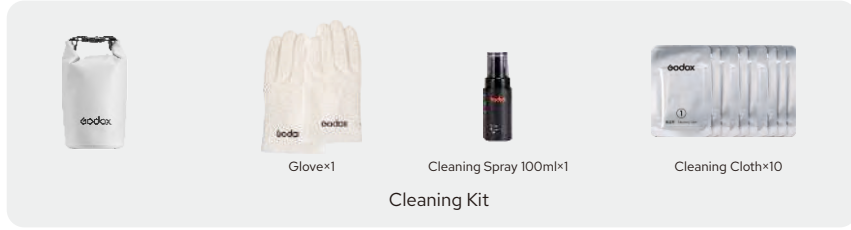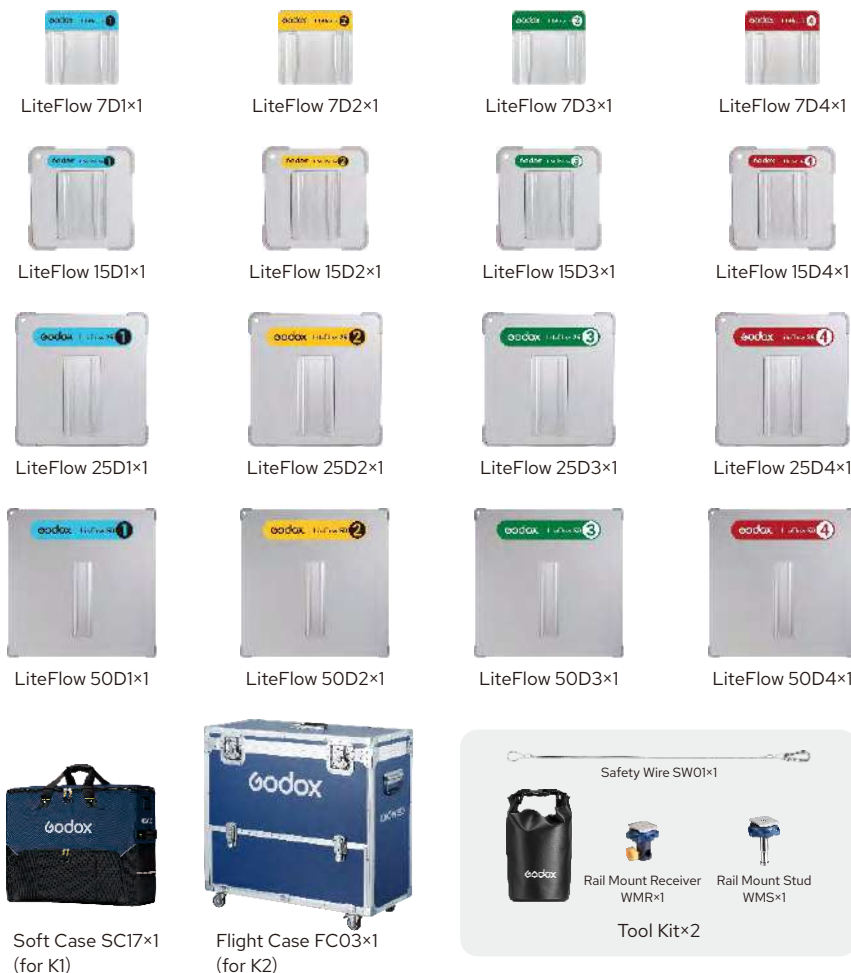

Optional Purchase

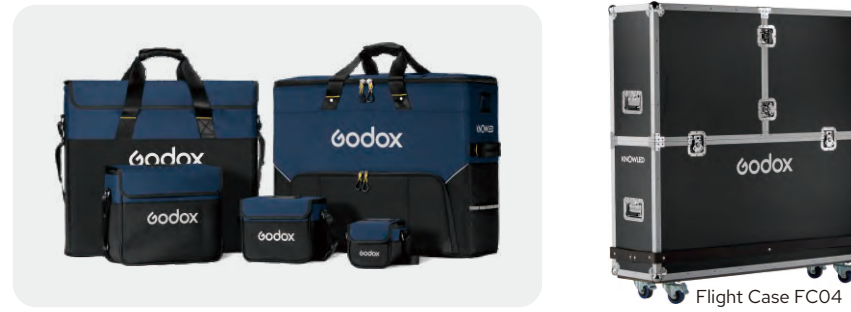


Rail Mount



Gag



Rod Set

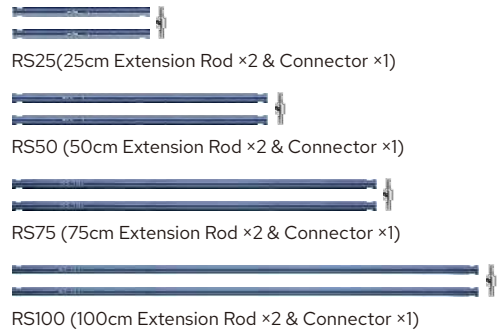

Multi-Adapter



Ball-Joint Arm



Flexible Arm


(Important Note: Maximum load 1kg, restricted to use with LiteFlow7/15/25.)



Multi-Reflector Array Grip Kit GK7



Multi-Reflector Array Grip Kit GK25

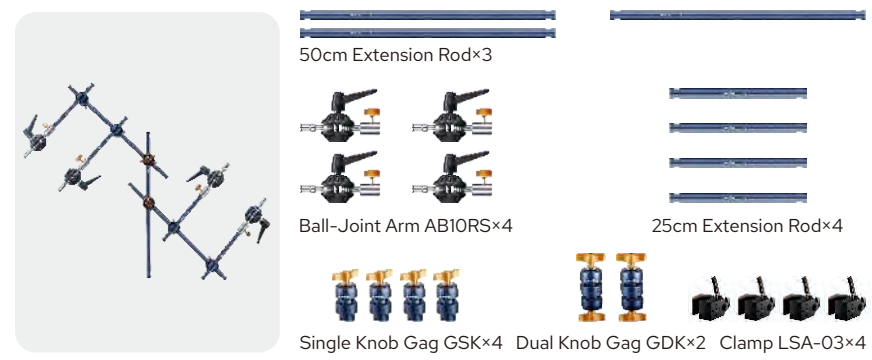


Multi-Reflector Array Grip Kit GK50



Cleaning Kit CK01



Safety Wire

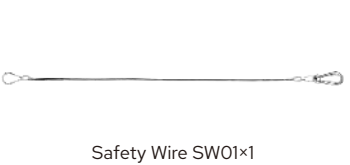



CONTROL SYSTEM

KNOWLED APP


- Professional lighting control app via tablet
- MIDI device control intergation
- Preset lighting and slider mode
- Cloud scene sharing & fixture bank cloud sync
- Auto-match color blocks to background
- 2 universe available for free
- Multi-threaded lighting effects synchronization
- Manage lights of any brand with a universal DMX protocol
- Seamlessly sync your on-set lights with a virtual grid for exact control
- Customize your fixture library tailored to your needs
- Connectivity Your Way: Choose between Bluetooth-CRMX and Ethernet Art-Net for versatile setup options.




Godox KNOWLED APP



MIDI device control

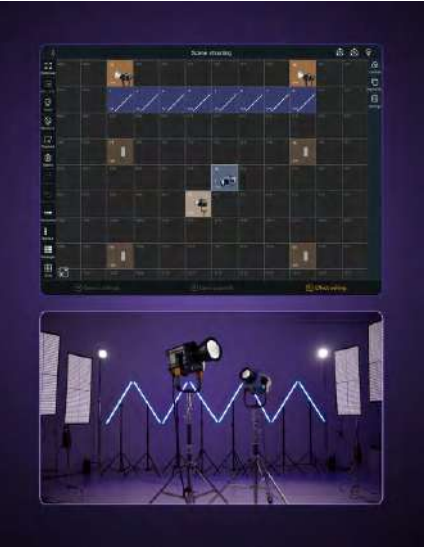

Position fixtures on the grid to match the setup

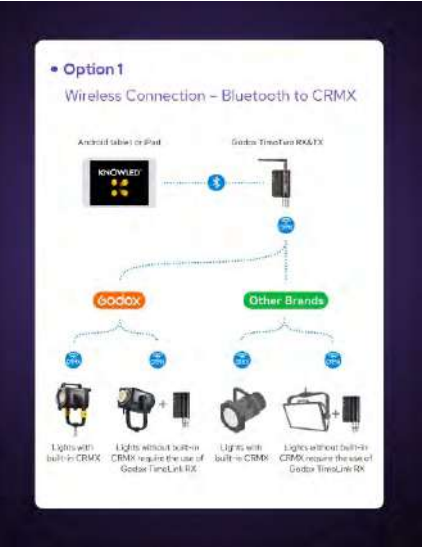

Wireless Connection - Bluetooth to CRMX



Wired Connection - Ethernet Art-Net



ACCESSORY



5° Beam Angle



Parallel Beam with
Slow Decay



Punchy Lighting



G-Mount
Compatibility




Incredible Throw
and Illuminance

BeamLight Max90

- 5° Beam Angle
- Cinematic-grade parallel beam lighting with slow decay
- Incredible throw and illuminance comparable to 12K HMIs
- Punchy lighting
- An innovation parallel lighting solution with LiteFlow
- G-Mount Compatibility



Dimension

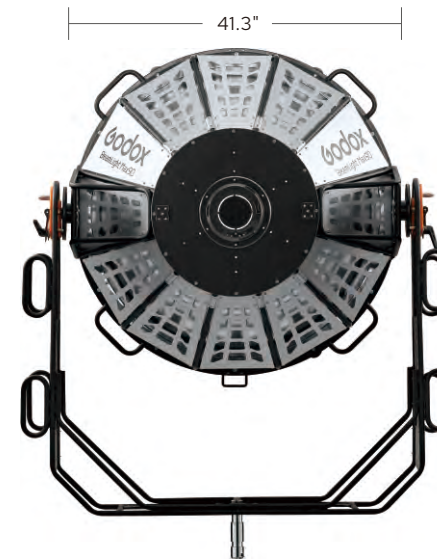



5° Beam

9.8 kg

Light Build



Protective Housing



Godox Bowens
Mount/G-mount

BeamLight B60/Max60

- 5° Narrow Beam
- Parallel Beam System
- Compatible with KNOWLED and G-mount lights
- Easy setup, only 10kg
- Protective housing for long-term use



B60

B60	×1	Support rods	×1
Spill Control Fabric	×1	Flight case	×4




Max60

Max60	×1	Flight case	×1
Spill Control Fabric	×1	Reinforced Brackets	×2
Supportrods	×4	(for MG1200Bi, MG1200R)	

Dimension



Optional Purchase

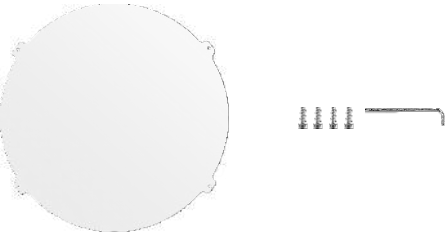

InsertShield Lens ISL-60
(Not recommended for use with fixtures over 2400W)

Godox Cinematic Grade Parallel Beam Lighting System

G-Mount Projection Attachment | GP19K/26K/36K



GP19K/26K/36K

- Evenly intensifying the illumination by times
- Project a crisp and clear beam without aberration
- Easily realizing versatile lighting effects with various accessories
- The rotatable handle allows more smooth and precise control
- Interchangeable lenses in 19°, 26°, 36°
- Efficient cooling system powered through G-Mount

Tech Specs

Model	Dimension	Weight
Projection attachment	418*647*727mm/16.5*25.5*28.6"(including lens)	≈11.6kg(excluding lens)
Lens 19°	281*235*289mm/11.1*9.3*11.4"	≈9.94kg
Lens 26°	281*235*289mm/11.1*9.3*11.4"	≈8.41kg
Lens 36°	281*234*287mm/11.1*9.2*11.3"	≈8.23kg



GP19K/26K/36K Projector	×1
Gobo Holder	×1
Gobo Set	×1
Portable Case	×1
Lens	×1



BP-19K/26K/36K

- Works with high-power flat Bowens-mount lights (such as M1000R, M600R, and M600Bi Pro)
- Built-in fan powered directly by the light for active cooling
- Compact and lightweight for easy one-person setup
- 360° rotatable barrel
- Precision optics for sharp, even beams and accurate color
- Three interchangeable lenses: 19°, 26°, 36°

Tech Specs

Model	Dimension	Weight
Projection attachment(excluding lens)	11.93*8.94*8.15"/303*227*207mm	5.4kg
Lens 19°	5.31*8.62*5.39"/135*219*137mm	1.9kg
Lens 26°	5.31*8.62*5.39"/135*219*137mm	1.7kg
Lens 36°	5.31*8.62*5.39"/135*219*137mm	2kg

Flat Bowens Mount Projection Attachment | BP-19K/26K/36K



Projection	×1
Gobo Holder(VSA-CF)	×1
U-type Bracket Set	×1
Storage Bag	×1
Gobo Set	×1
Signal Wire	×1
Projection Lens19°(BP-Lens19)	×1



Motorized Zoom Beam Bracket | ZB03



ZB03

- Beam zoom from a wide spread to a focused output
- Axial Angle: -7°00'~7°00'
- Outstanding performance on fast-moving subjects lighting
- Compatible with MG6K, MG4K/MG4KR, MG2400R/Bi, MG1200R/Bi

*Use the adapter MPT-50 A1200 when compatible with MG1200Bi/R

*Unsupported reflectors: MGR15, MGR45

Tech Specs

Model	ZB03
Axial Angle Range	-7°00'~7°00'
Working Environment Temperature	-20°C ~45°C
Dimension	≈46.06"*17.32"*45.67"
Net Weight	≈25kg



Motorized Fresnel | GF18M



GF18M

- 15°~60° Beam Angle Range
- Clean and Sharp Lighting
- Ideal for large-scale illuminance
- Motorized Zooming via light controller, DMX, CRMX, App control, on-accessory buttons, and manual rotation.
- G-mount accessory compatible with MG series

Tech Specs

Model	GF18M	Barndoor
Motorized Zooming Angle Range	15°~60°	/
Waterproof Rating	IPX5	/
Working Environment Temperature	-20°C~45°C	/
Dimension (without U-bracket and barndoor)	≈23.5"*23.86"*14.8"	≈25.08"*27.09"*1.57"
Net Weight (without U-bracket and barndoor)	≈17.3kg	≈5.1kg






GF14/FLS8/FLS10


FLS8+LB-01

FLS8 is compatible with the majority of Godox Bowens Mount LED lights.

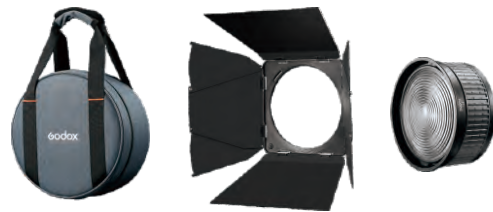


FLS10+LB-02

FLS10 is compatible with all Godox Bowens Mount LED lights.

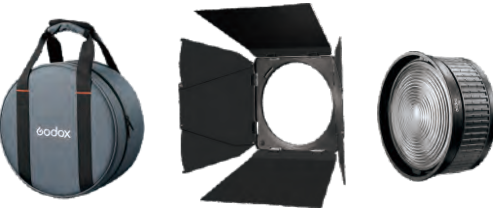

GF14+GF14B

GF14 is compatible with Godox G-Mount LED lights, such as MG1200Bi.

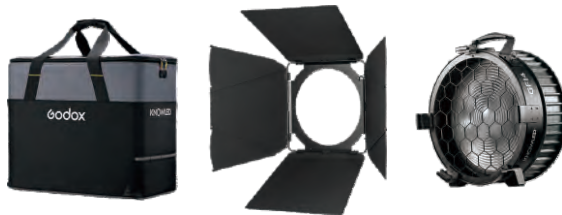


Tech Specs

Mode	FLS8	FLS10	GF14
Adjustable Beam Angle	10°-40°	10°-35°	15°-45°
Working Temperature	-10°C~40°C	-10°C~40°C	-10°C~40°C
Dimension	246*246*121mm	295*295*135mm	471*426*235mm
Weight	2kg	3kg	9.68kg


CS-50D/65D/85D

- Extremely fast setup
- Stunning, soft, omni-directional light
- Bowens Mount for compatibility
- Optional skirts for beam spread control



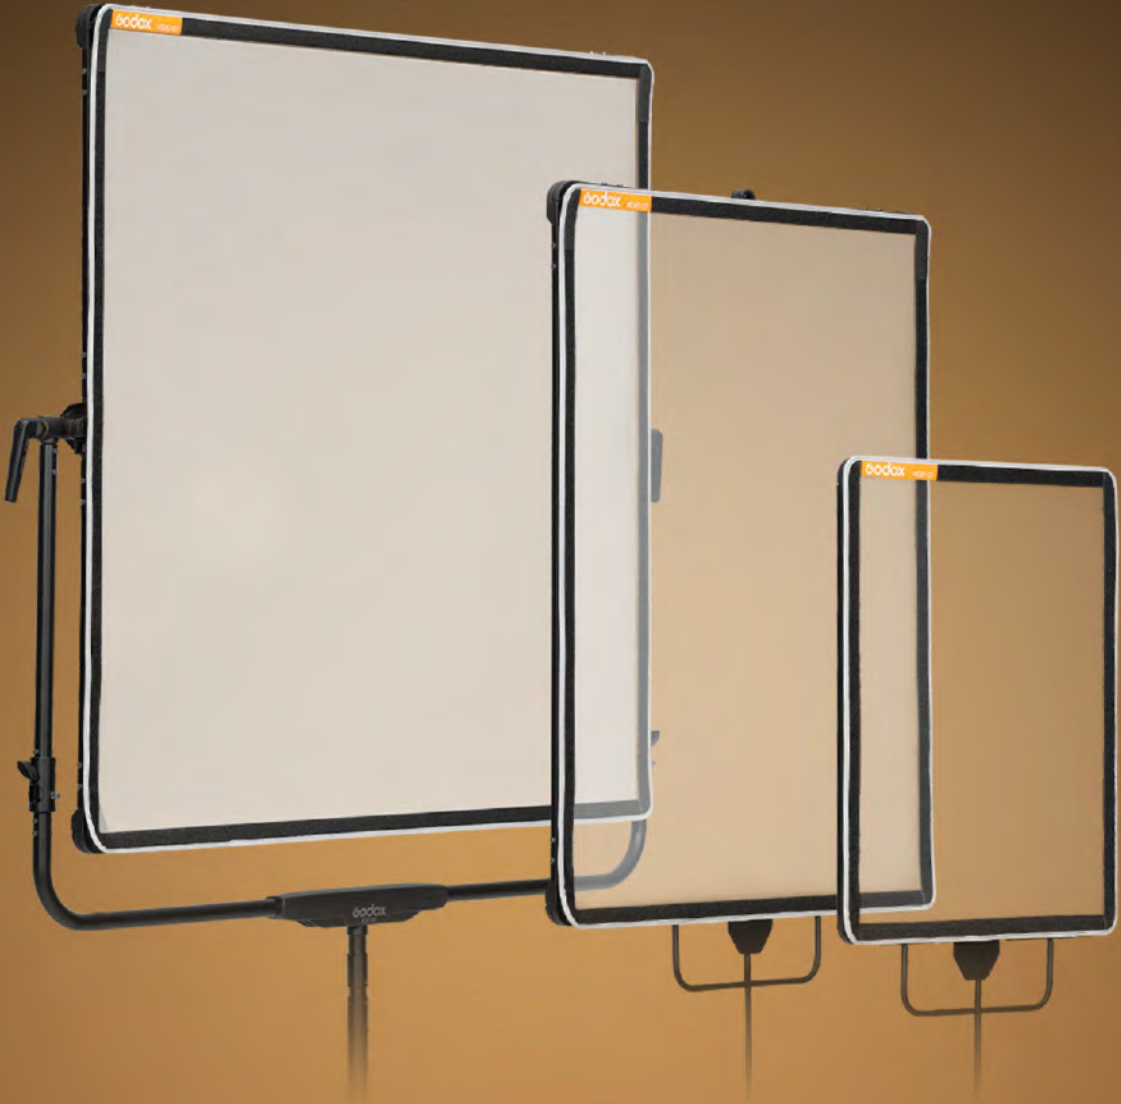


*This product is available for sale only in Asia, Europe, Africa, Oceania, and South America.

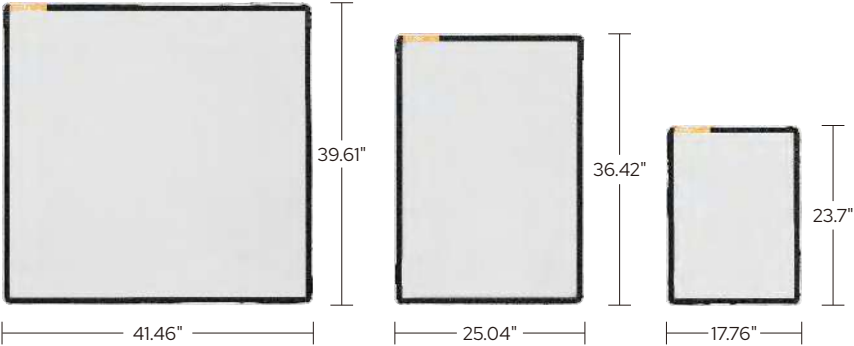

AD21/AD32/AD33

- Motorized diffusion adjustment, hard-to-soft light in seconds
- Two control mode: 0-100% or -0.1 to -2.0 EV
- Power via USB-C, V-mount, or NPF
- Up to 20h runtime (100Wh battery)
- Flicker-free up to 300fps
- Foldable frame for easy setup
- Removable, IP54-rated diffusion panel
- Control via DMX, CRMX, App, or controller
- Lead/Follow mode for multi-panel sync
- Three sizes available

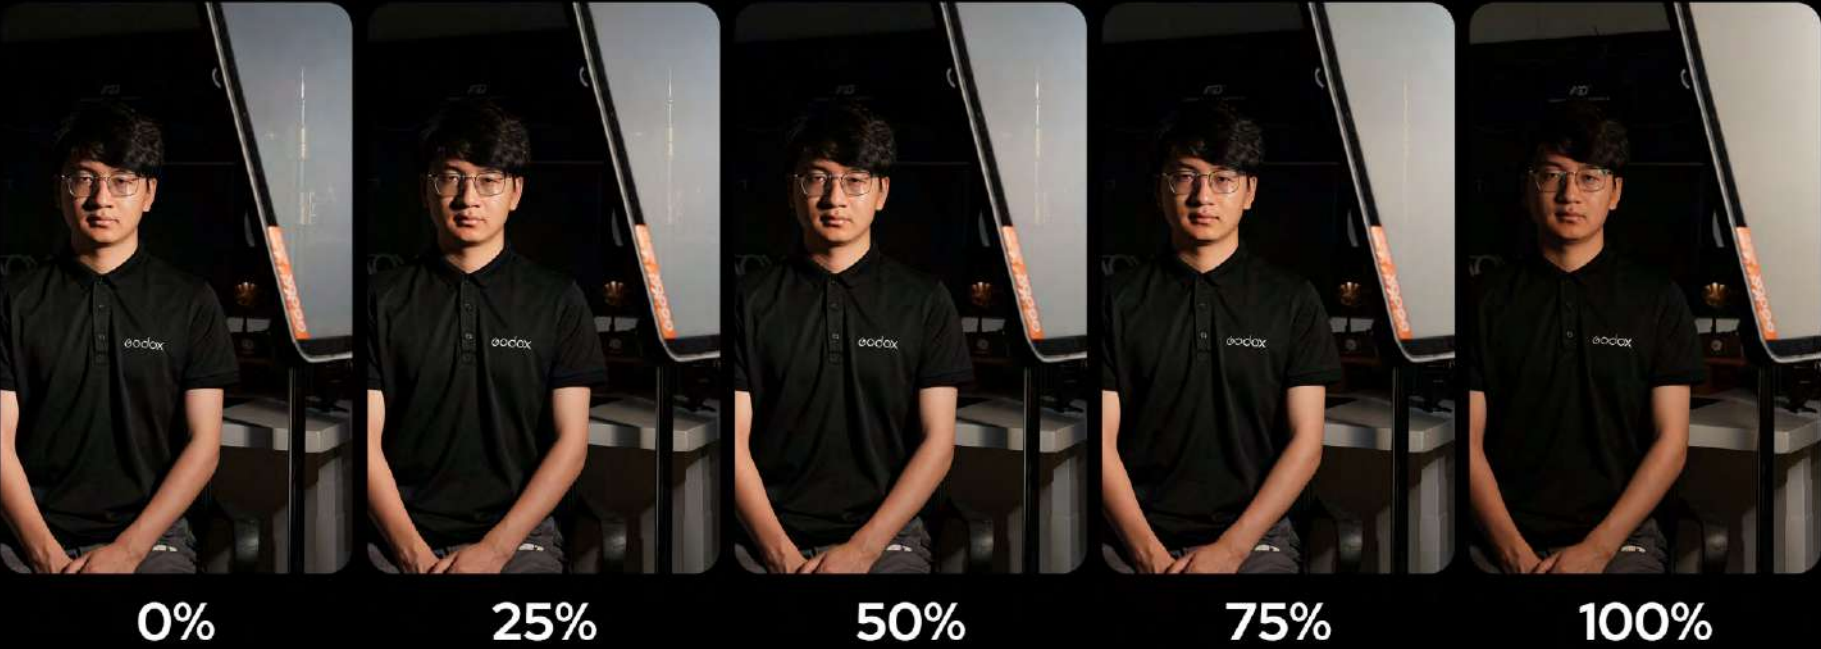

Level Mode: 0-100% Light Reduction Mode: -0.1 to -2.0 EV



Easy Storage: Collapsible Frame



Removable, Velcro-Attached Diffusion Panel

Two Controller Options



AD00-01



AD00-02

Function/Model	AD00-01	AD00-02
V-Mount Battery Power	✓	
NPF Battery Power		✓
USB-C Power	✓	✓
CRMX	✓	
DMX	✓	✓
Bluetooth	✓	✓
Level Mode(0-100%)	✓	✓
Light Reduction Mode(-0.1 to -2.0 EV)	✓	✓
Speed Adjustment(1-4)	✓	✓
Model Selection	✓	✓
Frequency Adjustment	✓	✓
Lead/Follow Mode	✓	✓



AD21 K2

Adjustable Diffusion AD21-01	×1
Bracket AD21-02	×1
Controller AD00-01	×1
AC Signal Control Cable	×1

USB-C Data Cable	×1
Storage Bag	×1
D-TAP to USB-C Adapter Cable	×1



AD32 K2

Adjustable Diffusion AD32-01	×1
Bracket AD32-02	×1
Reel	×1
AC Signal Control Cable	×1
Controller AD00-01	×1

Tube	×1
D-TAP to USB-C Adapter Cable	×1
USB-C Data Cable	×1
Storage Bag	×1



AD33 K2

Adjustable Diffusion AD33-01	×1
Bracket AD33-02	×1
Reel	×1
AC Signal Control Cable	×1
Controller AD00-01	×1

Tube	×1
D-TAP to USB-C Adapter Cable	×1
USB-C Data Cable	×1
Storage Bag	×1



AD21 K3

Adjustable Diffusion AD21-01	×1
Bracket AD21-02	×1
Controller AD00-02	×1

AC Signal Control Cable	×1
Storage Bag	×1



AD32 K3

Adjustable Diffusion AD32-01	×1
Bracket AD32-02	×1
Reel	×1
AC Signal Control Cable	×1

Controller AD00-02	×1
Tube	×1
Storage Bag	×1



AD33 K3

Adjustable Diffusion AD33-01	×1
Bracket AD33-02	×1
Reel	×1
AC Signal Control Cable	×1

Controller AD00-02	×1
Tube	×1
Storage Bag	×1



SF6090/SF4560 Kit

- Two versions to meet various size needs.
- Easy to store and transport with the carry case.
- Compact and foldable, making setup and usage easy.
- The black nets and one-stop silk can be used to adjust the contrast.
- The black solid fabric can be used to block unwanted illumination or create shadows.
- The two-stop silk can be used to diffuse and soften the light.
- The dots and fingers in black net and solid fabrics allow for shaping light on smaller objects or areas. Ideal for tabletop shooting or situations where larger fabrics are inconvenient.
- The open-edge design provides a softer cut of light and prevents hard transitions due to the edge.
- By finely adjusting the angle of the screen in front of the light, it allows for very changeable light and dark contrast, creating the desired transition.



QR-P70/P90/P120

- Reflective silver interior to render a punchy high contrast
- Removable inner and front fabric diffusers
- Impressive quick release system for rapid setup and breakdown
- Reliable light quality and various creative expressions
- Bowens mount strobes and continuous light compatible



Effortless Setup



Quick Breakdown



Square Softbox



Rectangular Softbox



Strip Softbox



Octagon Softbox



Square Softbox with Grid



Rectangular Softbox with Grid



Strip Softbox with Grid



Octagon Softbox with Grid

SPECS

	Square Softbox	Rectangular Softbox	Strip Softbox	Octagon Softbox
Model	SB-BW-6060/9090	SB-BW-6090/70100/80120	SB-FW-50130/35160	SB-FW-95/120/140
Size	60x60cm(23.6"x23.6")	60x90cm(23.6"x35.4")/70x100cm(27.6"x39.4")	50x130cm(23.6"x51.2")	φ95cm(37.4")/φ120cm(47.2")
	90x90cm(35.4"x35.4")	80x120cm(31.5"x47.2")	35x160cm(13.8"x 63.0")	φ140cm(55.1")

Lighting Stands & Mountings

SA5015

Heady Duty Steel Roller Stand

- 
168cm
- 
92cm
- 
10.4kg
- 
40kg



SA5045

Heady Duty Steel Roller Stand

- 
450cm
- 
146cm
- 
16.2kg
- 
40kg



240CS

C-Stand with Arm (Silver)

- 
95cm
- 
130cm
- 
237cm
- 
158cm
- 
6kg
- 
10kg
- 
25mm
- 
35/30/25mm



270CS

C-Stand with Arm (Silver)

- 
95cm
- 
140cm
- 
270cm
- 
168cm
- 
6.3kg
- 
10kg
- 
25mm
- 
35/30/25mm

